



# Technical information



## Micro Precision 7.28 MK III Tweeter



Level	Ohm
	0
-1,5	1
-3,1	2
-4,2	3
-5,3	4
-5,9	5
-7,1	6
-7,8	7
-8,3	8

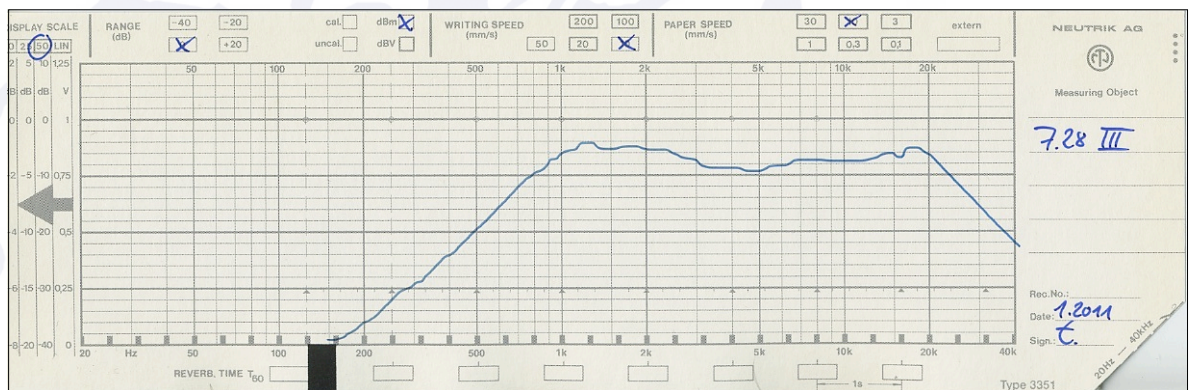

## Technical Data

Height total	48 mm	FS	780 Hz
Outer Diameter	56 mm	Sensitivity	90 dB 2,83V/1m.
Cutout Diameter	40 mm	R-DC	3,5 Ω
Interior Depth	26 mm	Power handling	100 W
Drillcircle	48.5 mm / 120 deg.	Voicecoil	Aluminium
		Voicecoil diameter	28 mm
		Membrane	Coatet Silk
		Recommended . Filter	2500 Hz / 6dB
Weight	0.300 kg / Pair	Updated :	JAN. 2011