


Specification


Midrange Type	☐	☐	Dome 2" - 50 mm
Nominal Impedance	☐	☐	4 Ohms
Nominal Power RMS	☐	☐	80 W *
Continuos Peak Power	☐	☐	140 W *
Frequency Response	☐	☐	600 - 7500 KHz
Sensitivity 1W/1m	☐	☐	93 dB

* 650 Hz 12dB/Oct.

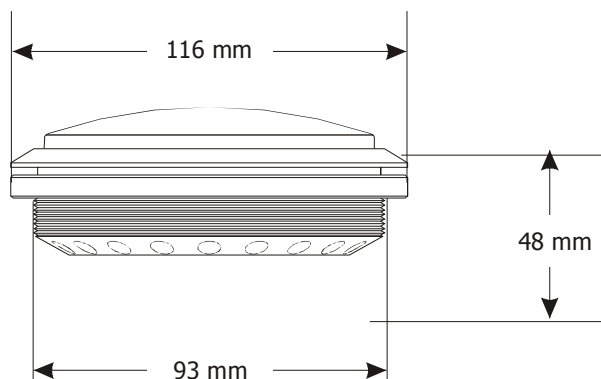


Thiele-Small Parameters

Moving Coil Resistance	☐	☐	Re	☐	☐	3.6 Ohms
Resonance Frequency	☐	☐	Fs	☐	☐	620 Hz
Mechanical Q	☐	☐	QMS	☐	☐	1.188
Electric Q	☐	☐	QES	☐	☐	0.458
Total Q	☐	☐	QTS	☐	☐	0.331
Mobile Mass	☐	☐	Mms	☐	☐	2.712 g
Mechanical Compliance	☐	☐	Cms	☐	☐	0.406 mm/N
Emission Diameter	☐	☐	D	☐	☐	5.1 cm
Surface Area	☐	☐	Sd	☐	☐	20.4 cm ²
Equivalent Acoustic Volume	☐	☐	Vas	☐	☐	0.237 liters
Moving Coil Inductance	☐	☐	Le	☐	☐	0.745 mH
Force Factor	☐	☐	BL	☐	☐	4.109 T/m

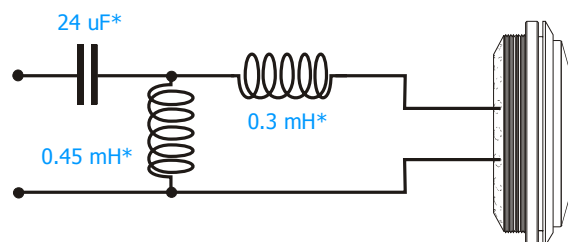

*Questo filtro passivo può essere sostituito con un filtro elettronico a 12 o 24dB/ott.

Frequency response 1W/1m

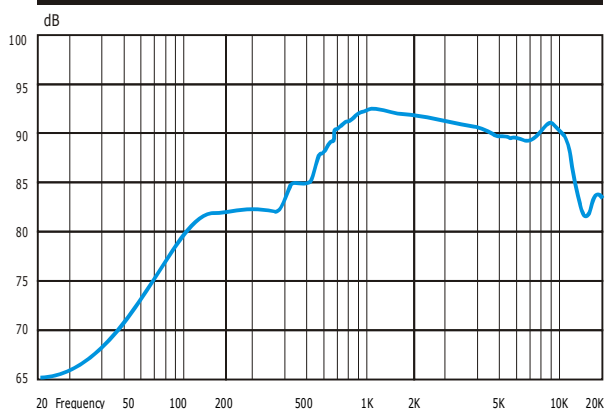

Impedance Curve (Free-air)

