

XXLS 10" Automotive



Type Number: 830876

Features:

This new series of state-of-the-art subwoofers continue to enhance Peerless' reputation for delivering the highest quality components for bass in the world. Called the XXLS - for "Xpanded Extra Long Stroke" - these new audio transducers add even more excursion to the Peerless XLS line, and completely eliminate distortion.

Driver Highlights: Thick Nomex cone, 51 mm voice coil, ALP






Specs:

Electrical Data	7	4	a la ma	Power handling		١٨/
Nominal impedance	Zn 	4	ohm	100h RMS noise test (IEC)		W
Minimum impedance	Zmin	2.2	ohm	Long-term Max System Power		W
Maximum impedance	Zo	26.5	ohm	(IEC)		JD AA
DC resistance	Re	1.7	ohm	Max linear SPL (rms) @ power		dB/W
Voice coil inductance	Le	1.5	mΗ	Short Term Max power		W
Capacitor in series with x ohm	Сс		uF	Voice Coil and Magnet Parameters		
T-S Parameters				Voice coil diameter	51	mm
Resonance Frequency	fs	39	Hz	Voice coil height	33	mm
Mechanical Q factor	Qms	6.79		Voice coil layers	4	
Electrical Q factor	Qes	0.47		Height of the gap	8	mm
Total Q factor	Qts	0.44		Linear excursion +/-	12.5	mm
Ratio fs/Qts	F	88		Max mech. excursion +/-		mm
Force factor	ВІ	10.4	Tm	Flux density of gap		mWb
Mechanical resistance	Rms	4.37	Kg/s	Total useful flux	2.4	mWb
Moving mass	Mms	121.1	g	Diameter of magnet	147	mm
Suspension compliance	Cms	0.14	mm/N	Height of magnet	35	mm
Effective cone diameter	D	21.2	cm	Weight of magnet	2.4	Kg
Effective piston area	Sd	352	cm ²			
•	Vas	23.6	Itrs			
Equivalent volume	v as	92.2	dB			
Sensitivity		-	UD			
Ratio BL/√(Re)		7.9				

Frequency:

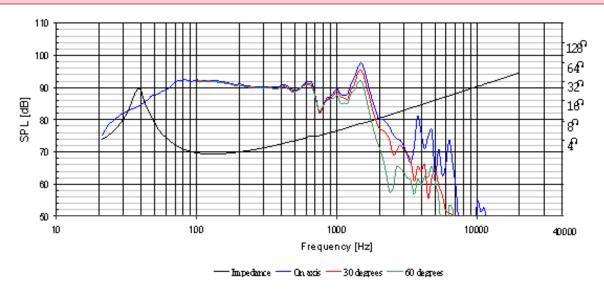

Mechanical Dimensions:

