

///ALPINE **SERVICE MANUAL**

SYSTEM INTEGRATION AUDIO PROCESSOR



EUPHONY
AUTOMOBILE



The signal pattern on P.W.Boards cannot cooperate with the Schematic Diagram.



3 / 11-A
T0111000122

PXA-H800

<Cautions for Safe Repair Work>

The following cautions will prevent accidents in the workplace and will ensure safe products.

*The symbols indicate caution is needed to prevent injuries and damage to property.

The symbols and their meanings follow.

 Warning	If you ignore this symbol and handle the product incorrectly or unsafely, serious injury or death may result.
 Caution	If you ignore this symbol and handle the product incorrectly or unsafely, injury or only material damage may result.

*The following symbols indicate two levels of cautions.

 When you see this symbol, you have to be very careful.	
 When you see this symbol, you have to follow the instructions there.	


Warning

 Do not look squarely into the laser light coming from the pickup. You may lose your sight.	 Fuse Caution Always use a designated fuse. Use of an incorrect fuse may result in a fire.
--	--

Caution

 Do not allow wiring to be caught in the screw/chassis. If wiring is caught in the screw/chassis, it may cause a short circuit, resulting in a fire.	 Battery Caution Use the designated battery. Confirm the correct polarity and seat of the battery. An incorrect battery or an improperly connected or seated battery may result in a fire.
 High Temperature Caution Touching the heat sink may cause severe burns.	 Designated Parts Caution Look up the part list and ensure that only designated parts are used to prevent problems or accidents.
 Reverse Power Supply Connections or Misconnections Caution Reverse power supply connections or misconnections may cause ignition problems and smoke may result.	 Wiring Caution Ensure that the wiring is correct when rewiring to prevent problems with ignition/breakdown.
 Soldering Caution Hot solder from solder splash may cause severe burns.	 Wear Gloves Wear gloves to prevent electrical shocks or injury from the end face of the metal.

Packing Method View

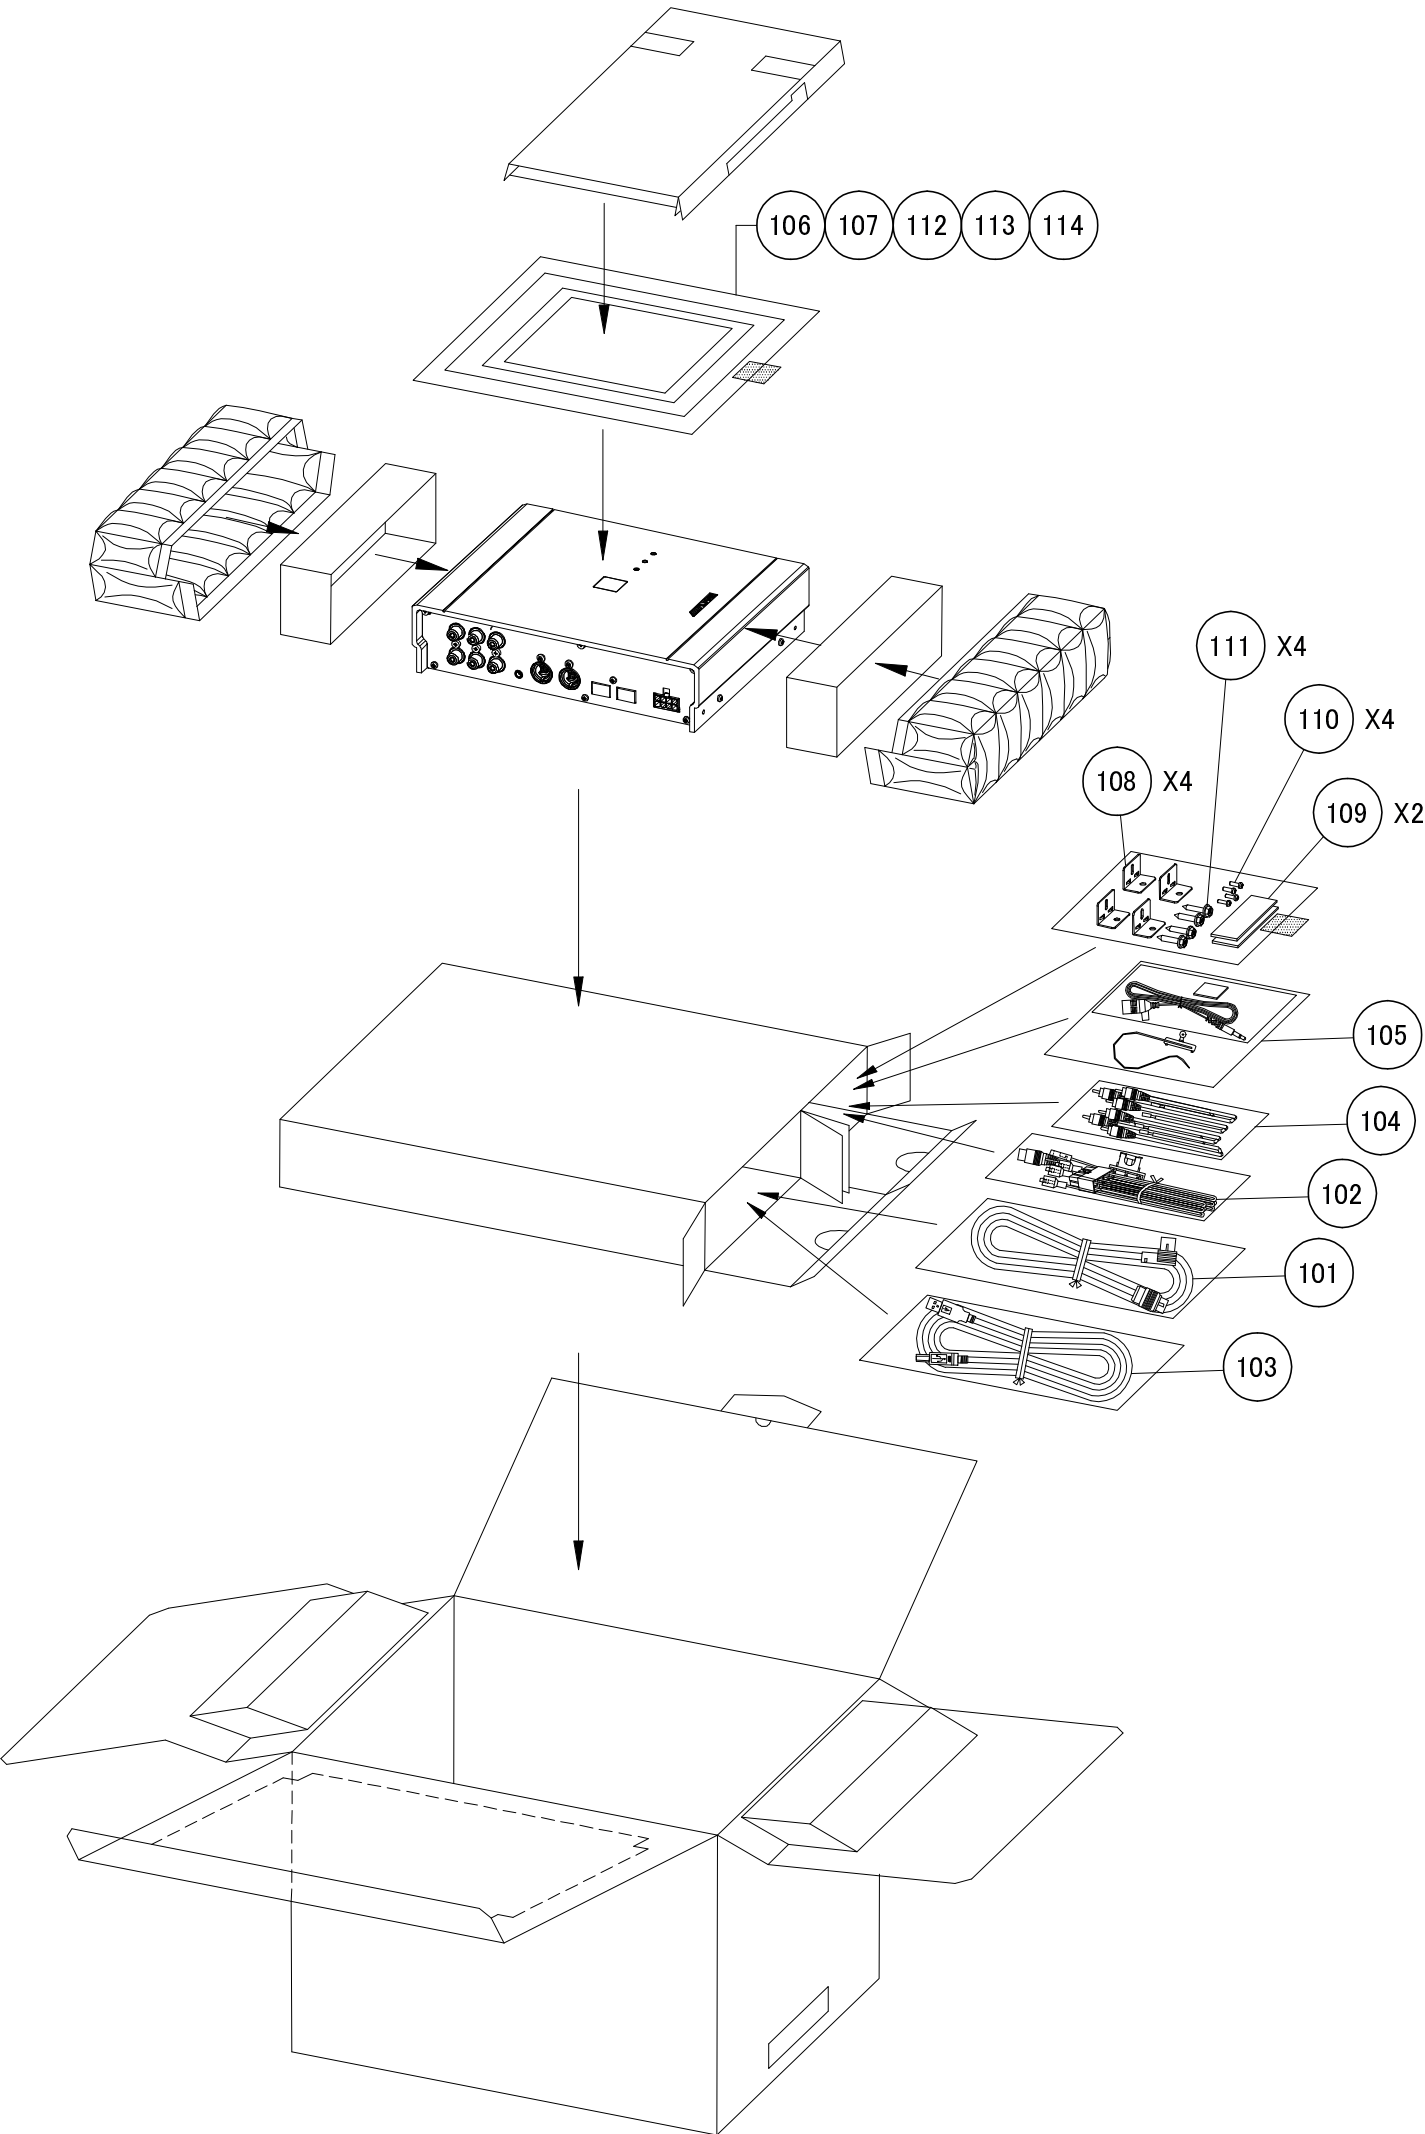

	101	01E42376S01	CONN,ASSY 8P
	102	01E42377S01	ASSY,KIT WIRE 8P
	103	01E42378S01	ASSY,CABLE
	104	01E42379S01	ASSY,CABLE 2P
	105	01E42380S01	MIC,LYS-M9750
	106	99E42459S01	CD-ROM,Sound Manager
	107	99E42460S01	CD-ROM,SETUP(Audio)
	108	07E42416S01	BKT,MOUNT
	109	75E26094S01	TAPE,PAD-MAGIC
	110	03E42381S01	SCR,M3X6(B)(BLK)
	111	03E42382S01	SCR,M4X14(HW)(BLK)
#1	112	68-13530Z65	O/M H800 AOAM(Eng,Fra,Esp)
\$1	112	68-13530Z67	O/M H800 AOEU(Eng,Fra,Esp)
%1	112	68-13530Z70	O/M H800 AOAP
#1	113	68-13530Z66	I/M H800 AOAM
\$1	113	68-13530Z69	I/M H800 AOEU
%1	113	68-13530Z71	I/M H800 AOAP
\$1	114	68-13530Z68	O/M H800 AOEU(It,Ger,Sv)

Mark Model Code

#1 PXA-H800(North American) Only,

\$1 PXA-H800(European) Only,

%1 PXA-H800(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

#####

System Connection


(1) PXA-H800 (North American) Only

System Example


Connecting an automobile factory system (standard audio, etc.) and External Amplifier

■ Input Pattern: 4ch&2ch Input


AUX INPUT					
CH-1 (L)	CH-2 (R)	CH-3 (L)	CH-4 (R)	CH-5 (L)	CH-6 (R)
AUX1			AUX2		
FL (Front Left)	FR (Front Right)	RL (Rear Left)	RR (Rear Right)	L (Left)	R (Right)

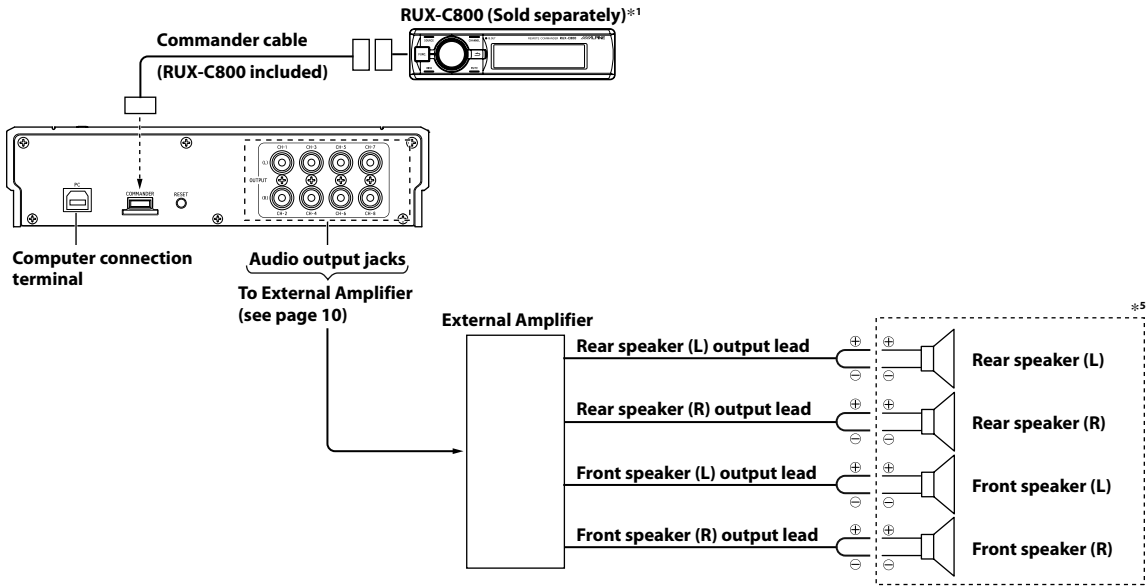

- *1 When using a factory car audio system, the RUX-C800 Commander (sold separately) is required.
- *2 If your factory system does not have a Remote Turn-On Lead, connect a cable that enables an incoming power supply (accessory power) in the ACC position.
- *3 If using the Speaker-RCA Conversion cable, up to 6 channels can be input. Make connections according to your system.
- *4 Before using the Speaker-RCA Conversion cable, remove the cord tip coating, cut the cord into 2 cables, connect the cable with commercially available bullet or solderless terminals attached to the tips.



- *5 When connecting a speaker input cable, connect via a solderless terminal or solderless connector after disconnecting the automobile's speaker cable.




CAUTION

Make sure to disconnect the factory speakers and the speaker output cable for the factory system.


When using fiber cable, follow the guidelines below:

- When laying or bundling optic fiber cables, the minimum bending radius should be 30 mm. Bending beyond the radius will break the cable, resulting in no digital sound being output.
- Do not put the product or other items on the optic fiber cable.

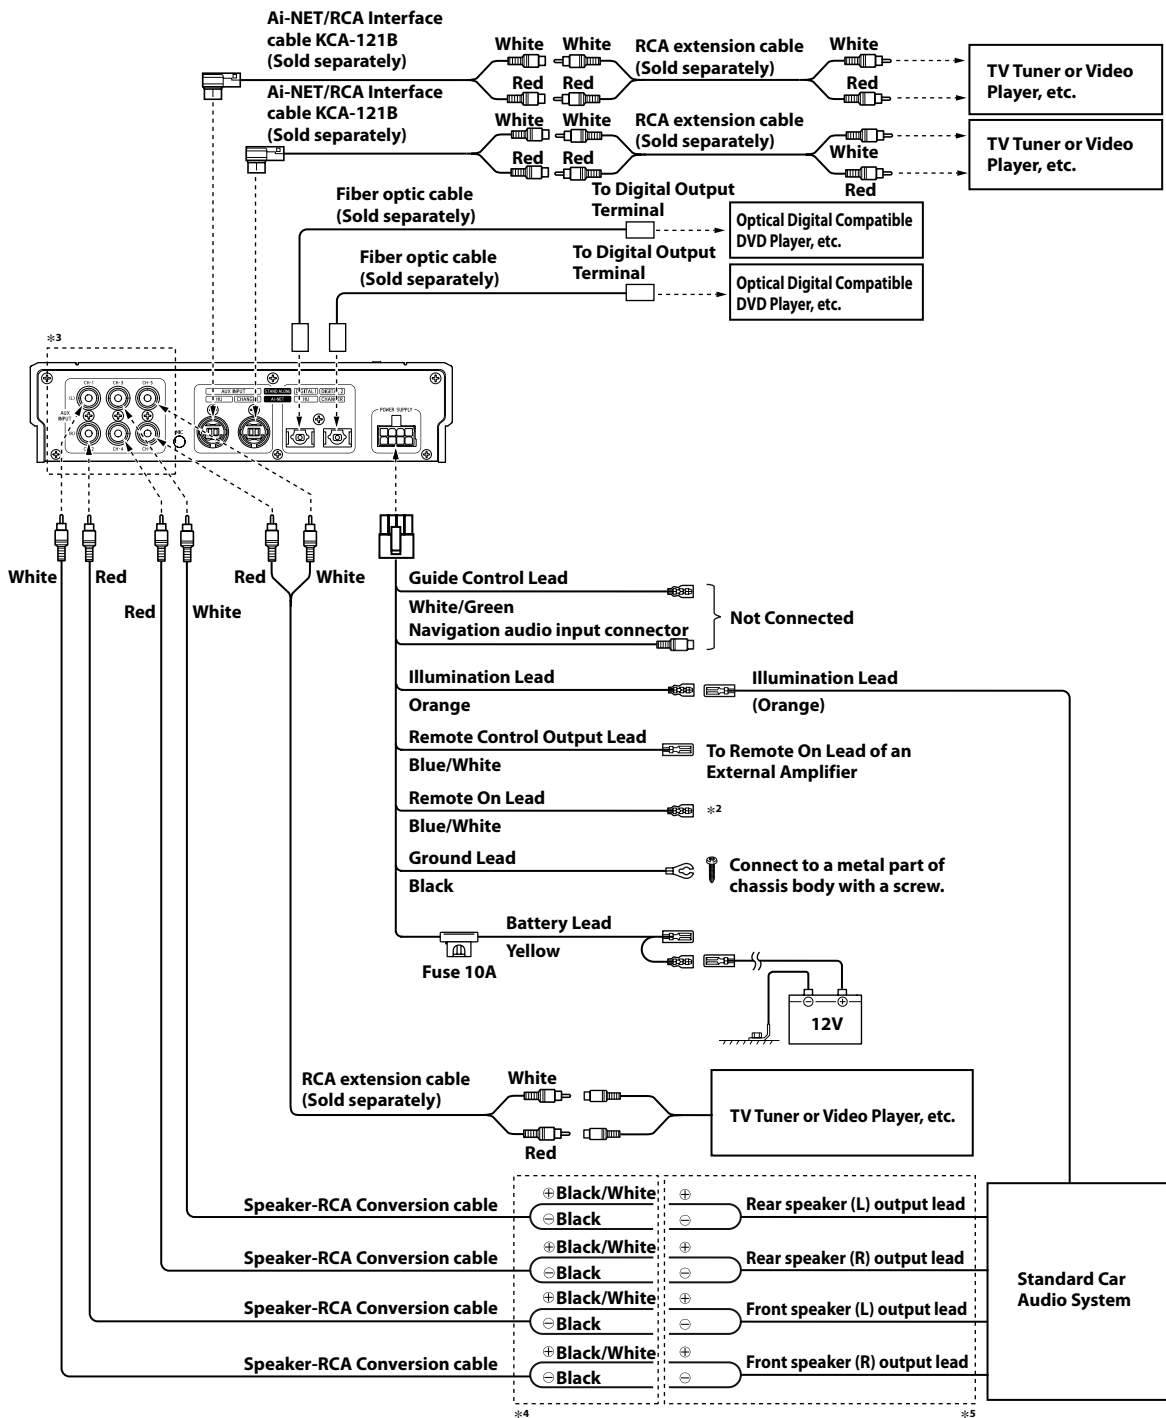

Connecting a Non Ai-NET AV Head Unit, External Input and External Amplifier

Input Pattern : 5.1ch Input

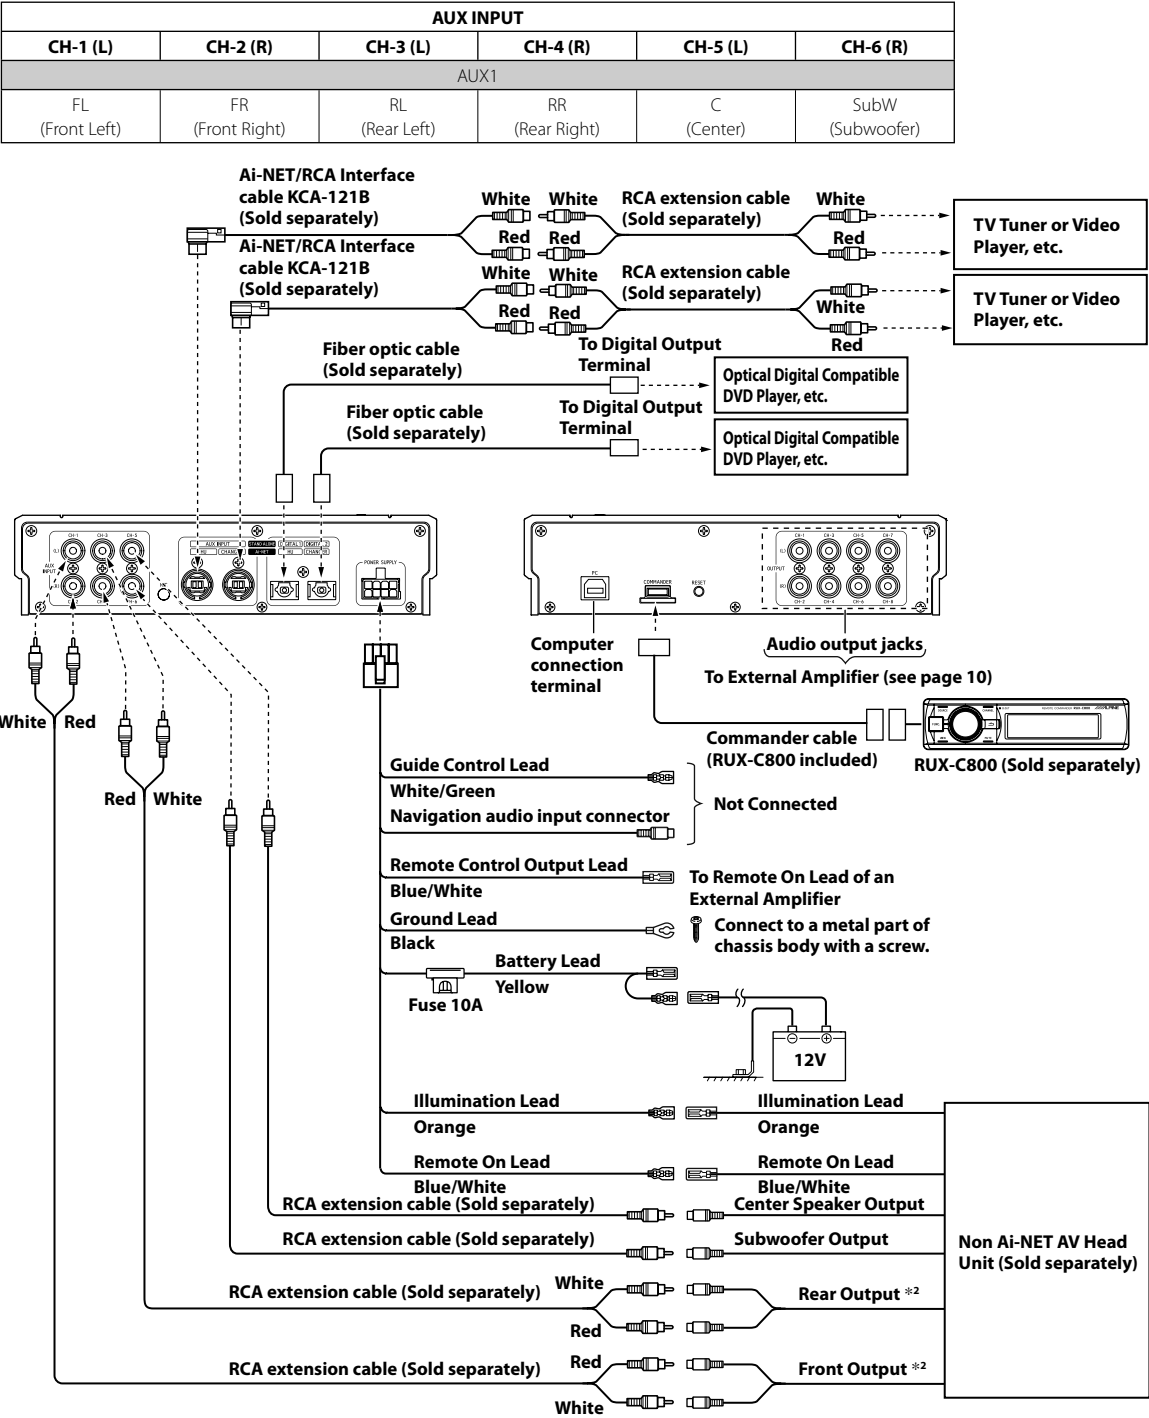


*1 When using a head unit that is not Ai-NET compatible, the RUX-C800 Commander (sold separately) is required.

CAUTION

- When using fiber cable, follow the guidelines below:
- When laying or bundling optic fiber cables, the minimum bending radius should be 30 mm. Bending beyond the radius will break the cable, resulting in no digital sound being output.
 - Do not put the product or other items on the optic fiber cable.

Connecting a Non Ai-NET Head Unit, External Input and External Amplifier

Input Pattern : 2ch×3 Input

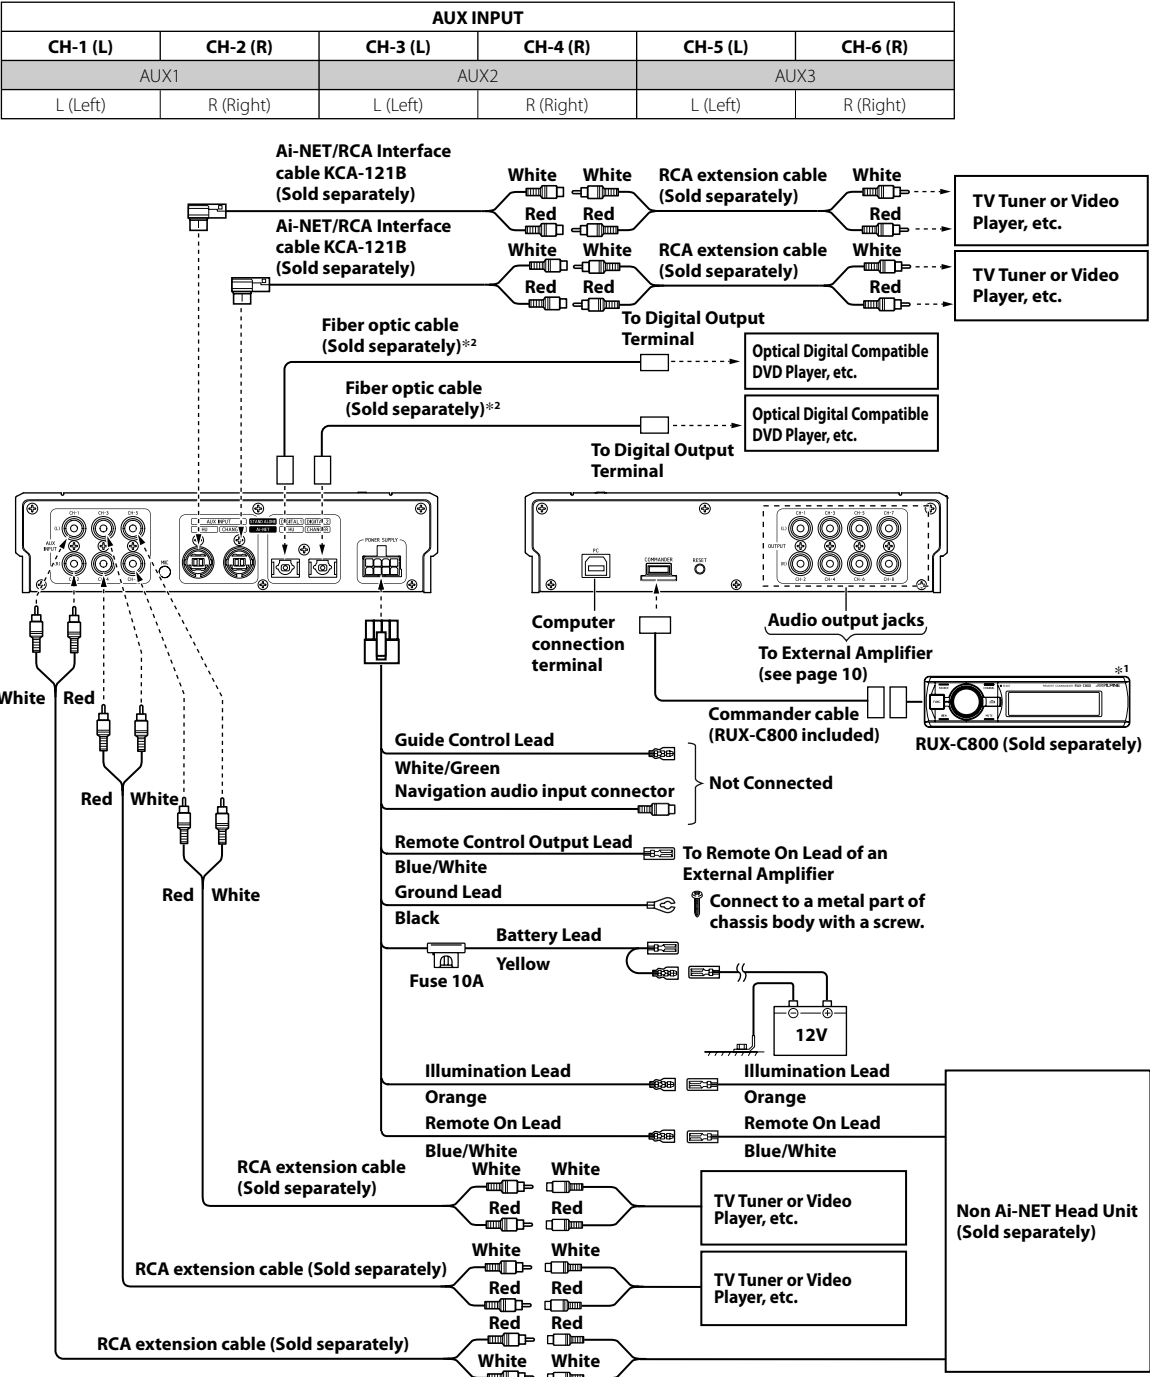

*1 When using a head unit that is not Ai-NET compatible, the RUX-C800 Commander (sold separately) is required.


*2 Use when connected with an Optical Digital compatible Unit.

CAUTION

When using fiber cable, follow the guidelines below:

- When laying or bundling optic fiber cables, the minimum bending radius should be 30 mm. Bending beyond the radius will break the cable, resulting in no digital sound being output.
- Do not put the product or other items on the optic fiber cable.

Connecting an Ai-NET compatible AV Head Unit (INA-W910), ALPINE Navigation System, Ai-NET compatible Changer and External Amplifier

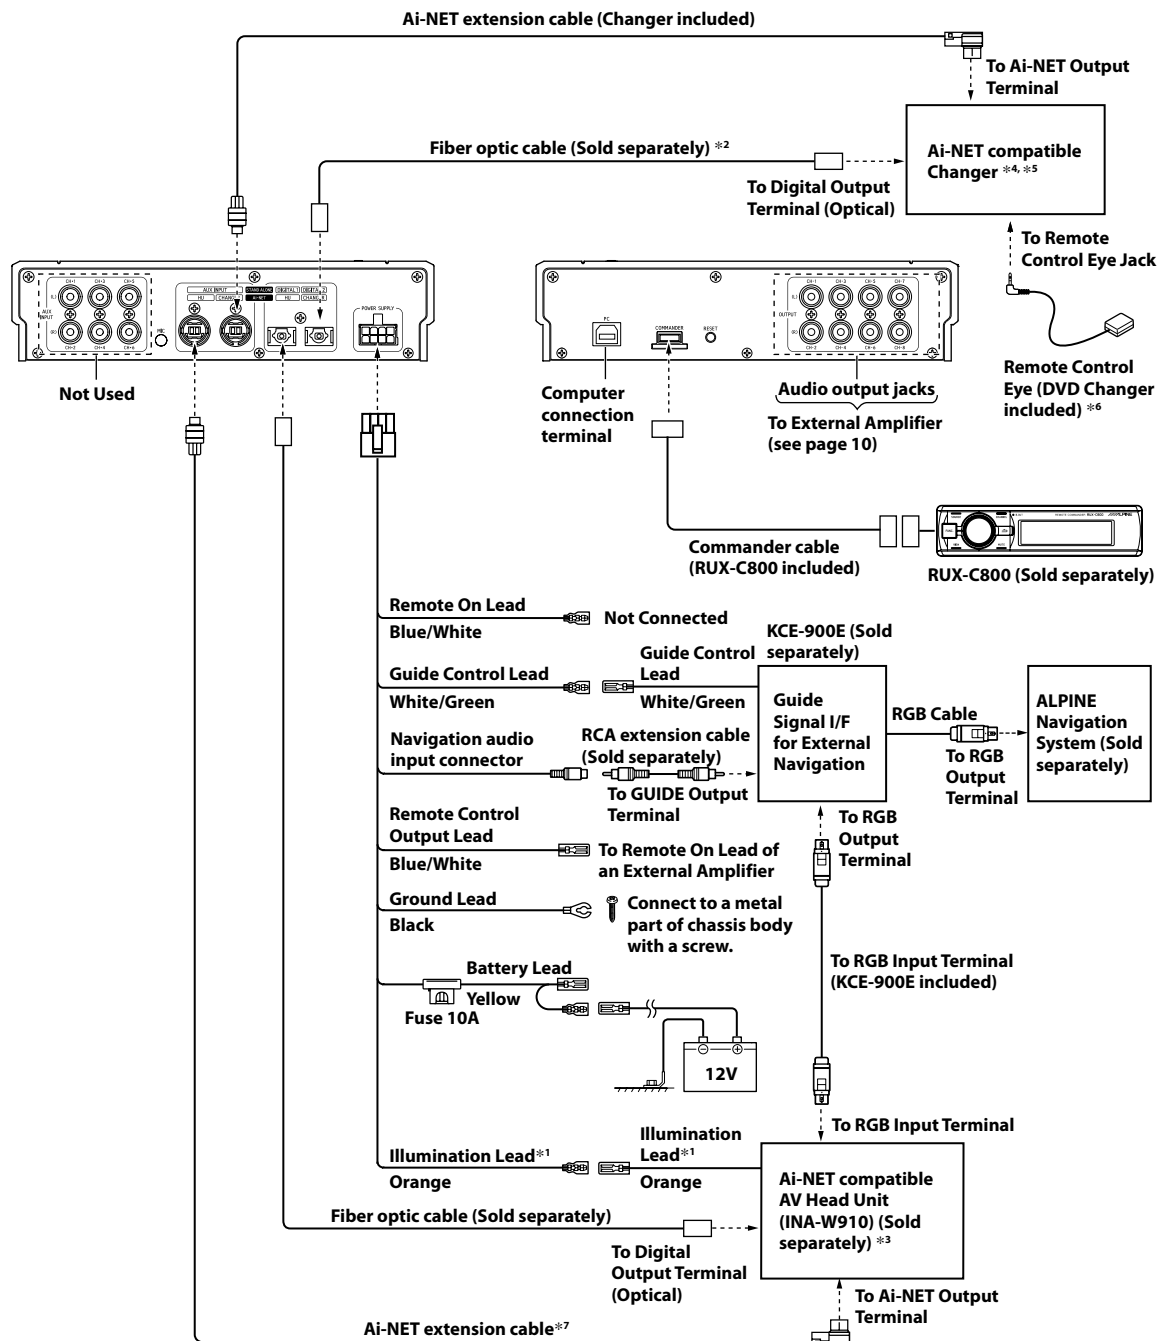

*1 Use when connected with the RUX-C800 Commander (sold separately).

*2 Use when connected with an Optical Digital compatible Changer.

*3 Set the system switch to [EQ/DIV] or [EXT AP]. For details, refer to the Owner's Manual for the product connected.

*4 Setting the system switch is required. For details, refer to the Owner's Manual for the connected changer.

*5 If the Ai-NET compatible Changer is a DVD Changer (DHA-S690 Series or DHA-S680 Series), do not connect its Switched Power Lead (Red).

*6 If the Ai-NET compatible Changer is a DVD Changer (DHA-S690 Series or DHA-S680 Series), do not connect the Remote Control Eye in a system that uses an Ai-NET compatible AV Head Unit. (Connection of the remote input cord (white/brown) is required.) Use the Remote Control Eye in a system that uses any other manufacturer's monitor. For details, refer to the connected DVD changer's instruction manual.

*7 If connecting DVA-5210, connect it between the unit and the head unit using an additional Ai-NET extension cable. In this case, also connect the audio output jacks (L=white/R=red) of DVA-5210 to the AUX INPUT CH-1 (L)/CH-2 (R) jacks of the unit.




CAUTION

When using fiber cable, follow the guidelines below:

- When laying or bundling optic fiber cables, the minimum bending radius should be 30 mm. Bending beyond the radius will break the cable, resulting in no digital sound being output.
- Do not put the product or other items on the optic fiber cable.

Connecting an Ai-NET compatible Head Unit, Ai-NET compatible Changer and External Amplifier

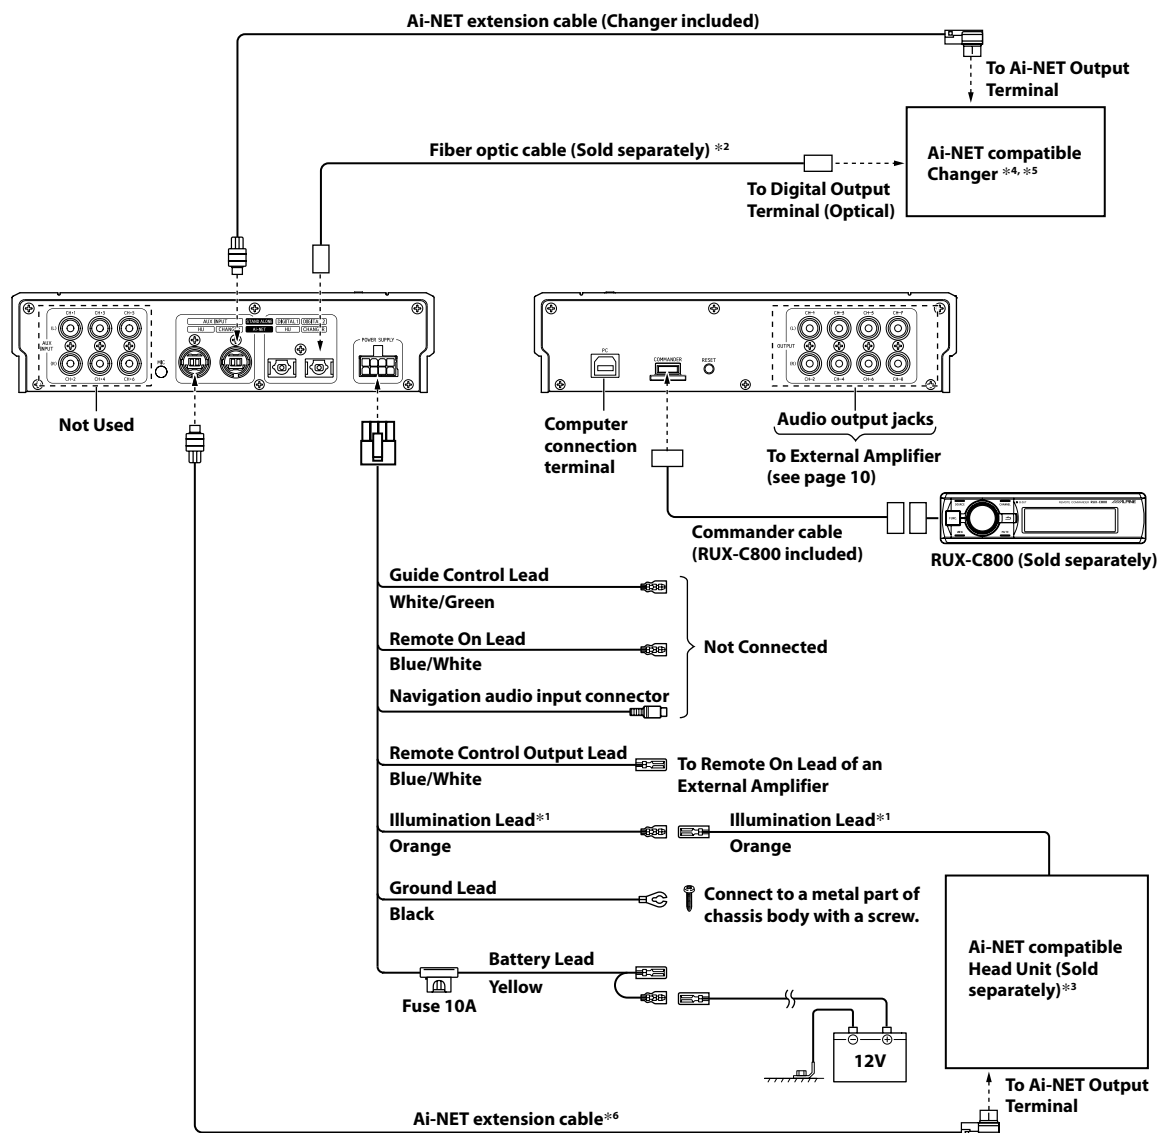

*1 Use when connected with the RUX-C800 Commander (sold separately).

*2 Use when connected with an Optical Digital compatible Changer.

*3 Checking and setting of the system switch are required. For details, refer to the Owner's Manual for the product connected.

*4 If connecting with an Optical Digital compatible Changer, setting the system switch is required. For details, refer to the Owner's Manual for the connected changer.

*5 If the Ai-NET compatible Changer is a DVD Changer (DHA-S690 Series or DHA-S680 Series), do not connect its Switched Power Lead (Red).

*6 If connecting DVA-5210, connect it between the unit and the head unit using an additional Ai-NET extension cable. In this case, also connect the audio output jacks (L=white/R=red) of DVA-5210 to the AUX INPUT CH-1 (L)/CH-2 (R) jacks of the unit.



CAUTION

When using fiber cable, follow the guidelines below:

- When laying or bundling optic fiber cables, the minimum bending radius should be 30 mm. Bending beyond the radius will break the cable, resulting in no digital sound being output.
- Do not put the product or other items on the optic fiber cable.


(2) PXA-H800 (European) Only

System Example

Connecting an automobile factory system (standard audio, etc.) and External Amplifier

■ Input Pattern: 4ch&2ch Input

AUX INPUT					
CH-1 (L)	CH-2 (R)	CH-3 (L)	CH-4 (R)	CH-5 (L)	CH-6 (R)
AUX1			AUX2		
FL (Front Left)	FR (Front Right)	RL (Rear Left)	RR (Rear Right)	L (Left)	R (Right)

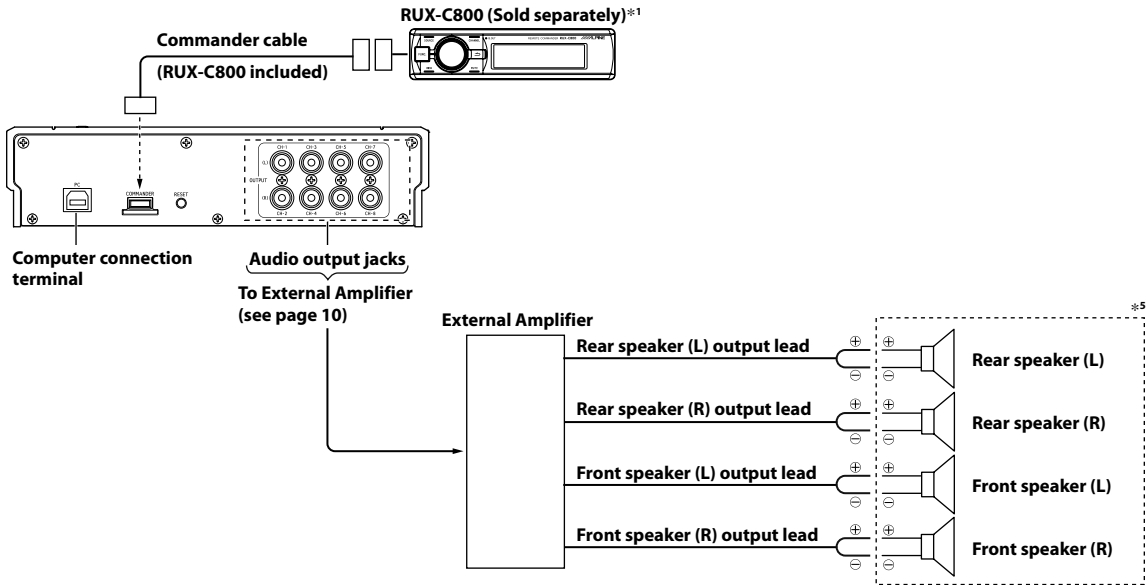


*1 When using a factory car audio system, the RUX-C800 Commander (sold separately) is required.


*2 If your factory system does not have a Remote Turn-On Lead, connect a cable that enables an incoming power supply (accessory power) in the ACC position.

*3 If using the Speaker-RCA Conversion cable, up to 6 channels can be input. Make connections according to your system.

*4 Before using the Speaker-RCA Conversion cable, remove the cord tip coating, cut the cord into 2 cables, connect the cable with commercially available bullet or solderless terminals attached to the tips.



*5 When connecting a speaker input cable, connect via a solderless terminal or solderless connector after disconnecting the automobile's speaker cable.




CAUTION

Make sure to disconnect the factory speakers and the speaker output cable for the factory system.


When using fiber cable, follow the guidelines below:

- When laying or bundling optic fiber cables, the minimum bending radius should be 30 mm. Bending beyond the radius will break the cable, resulting in no digital sound being output.
- Do not put the product or other items on the optic fiber cable.

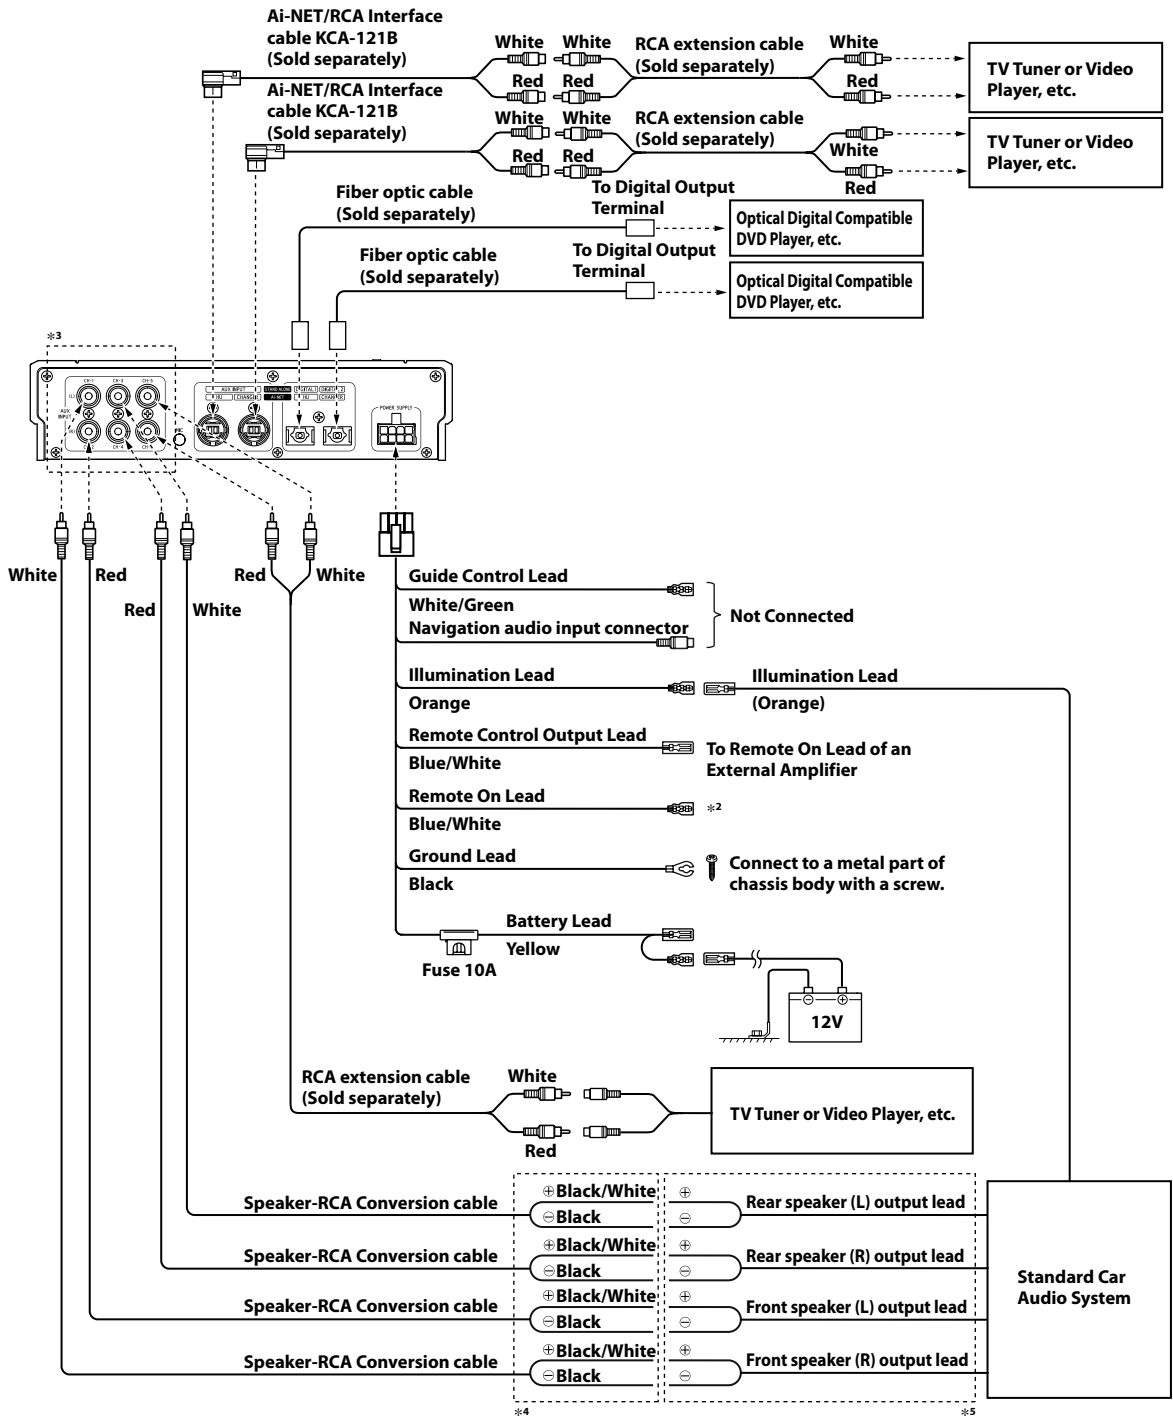

Connecting a Non Ai-NET AV Head Unit, External Input and External Amplifier

Input Pattern : 5.1ch Input

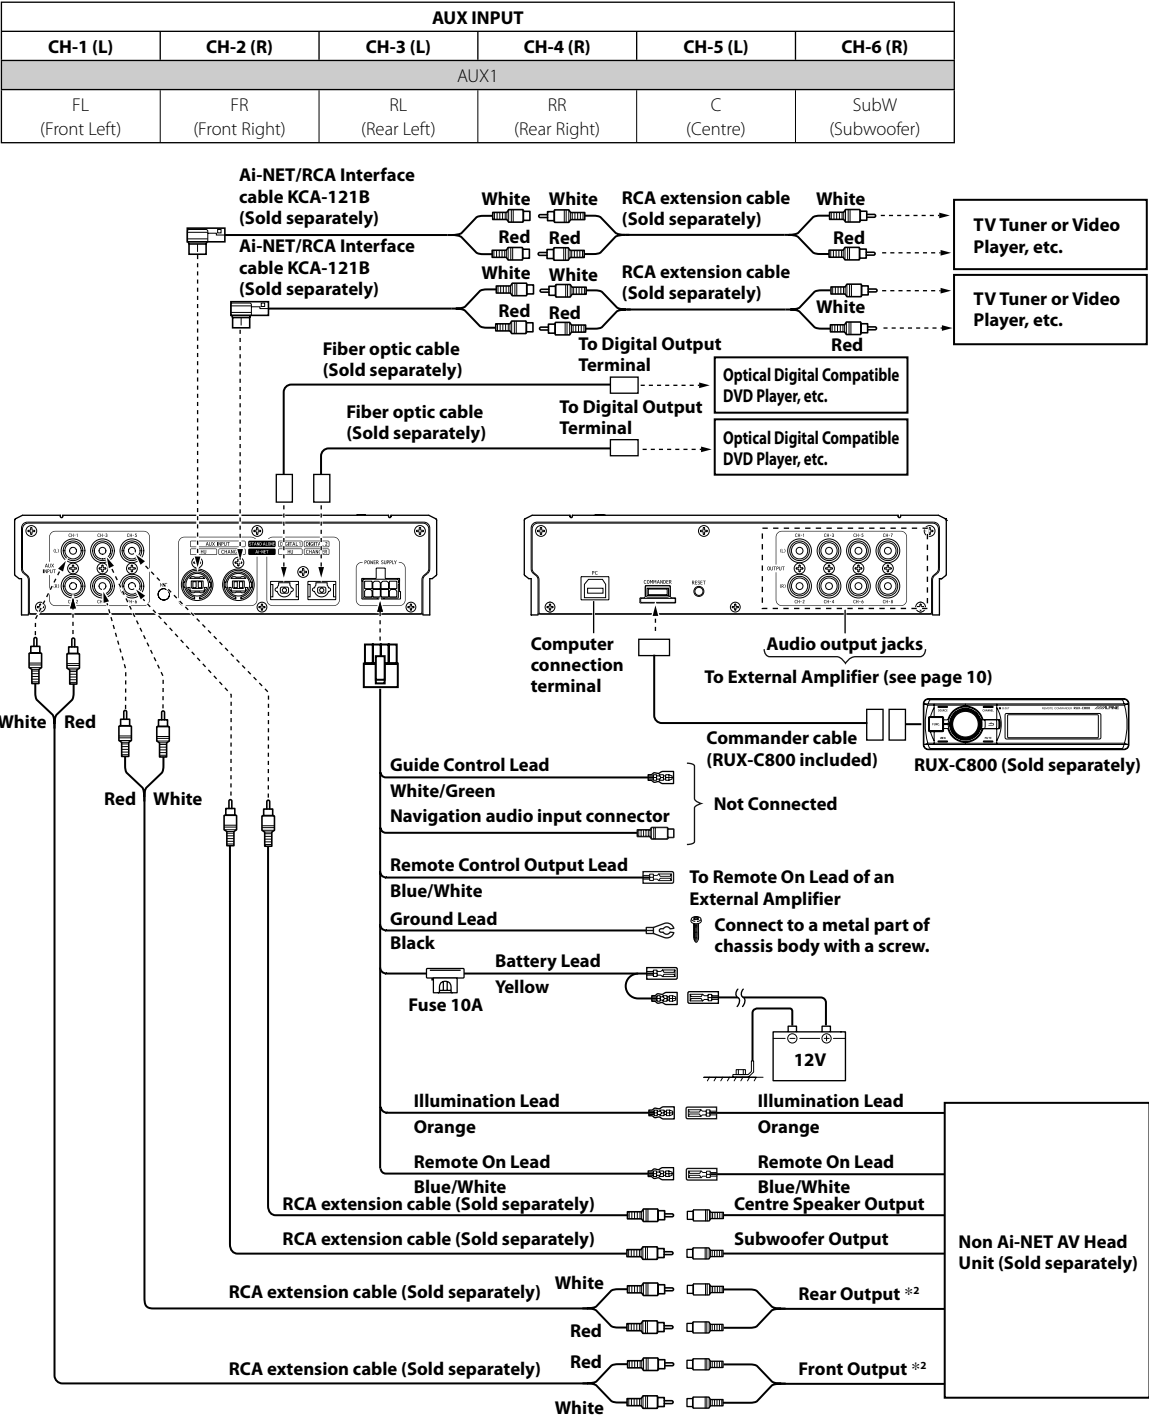

*1 When using a head unit that is not Ai-NET compatible, the RUX-C800 Commander (sold separately) is required.


CAUTION

When using fiber cable, follow the guidelines below:

- When laying or bundling optic fiber cables, the minimum bending radius should be 30 mm. Bending beyond the radius will break the cable, resulting in no digital sound being output.
- Do not put the product or other items on the optic fiber cable.

Connecting a Non Ai-NET Head Unit, External Input and External Amplifier

Input Pattern : 2ch×3 Input

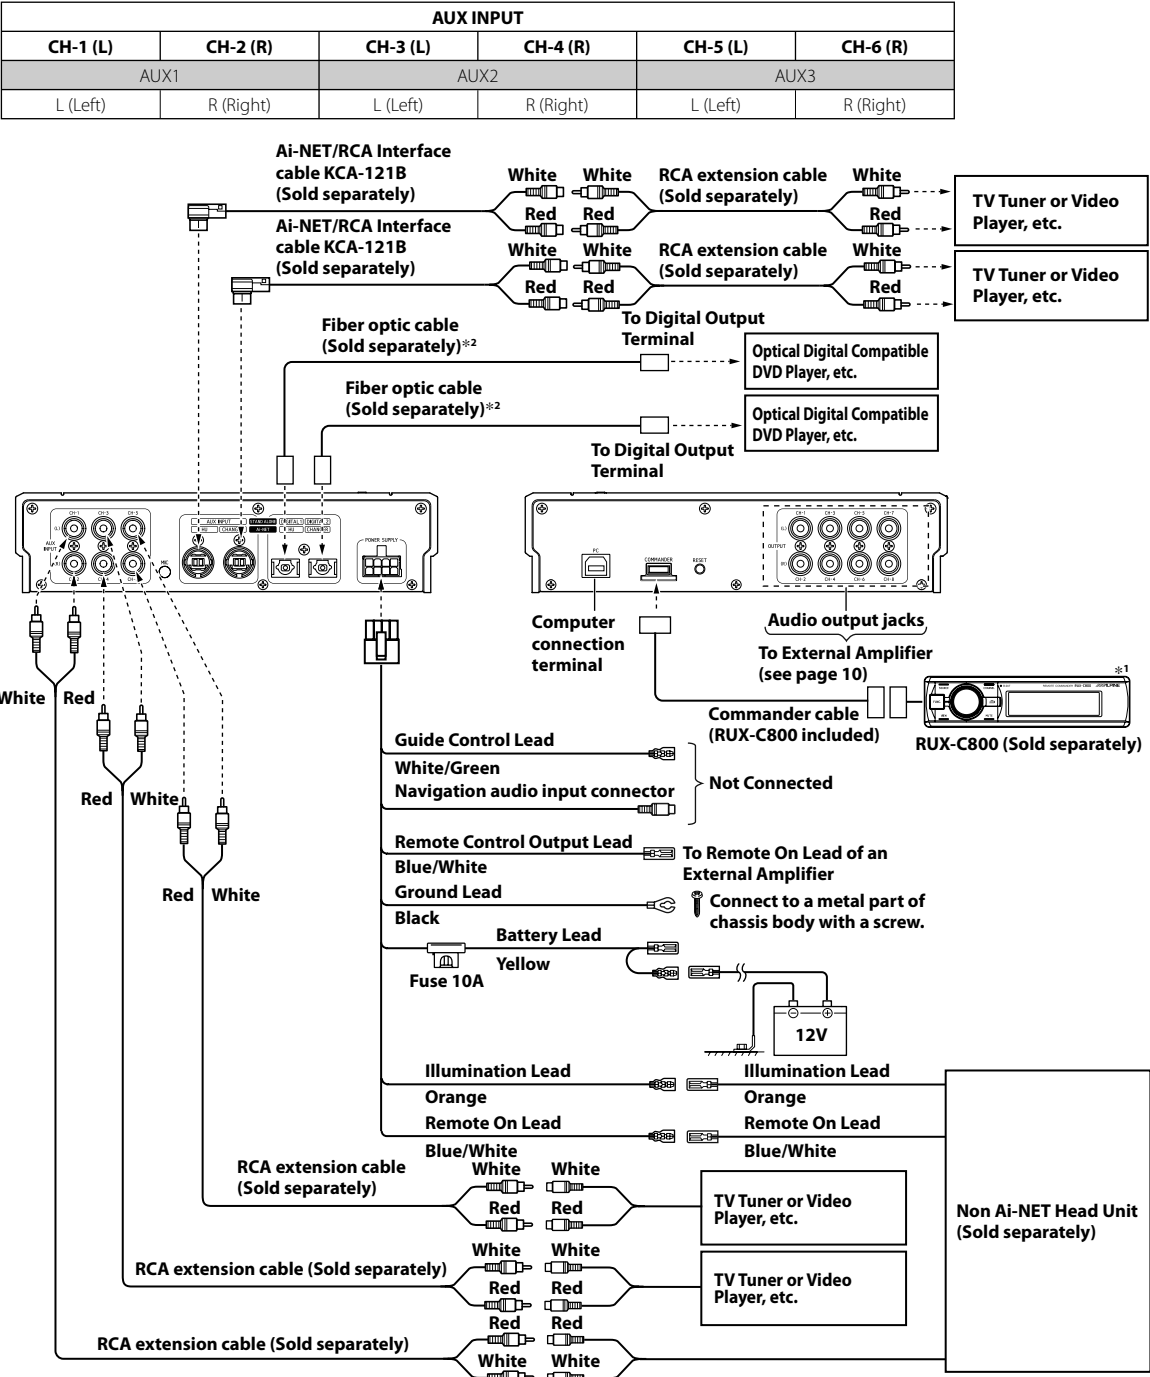

*1 When using a head unit that is not Ai-NET compatible, the RUX-C800 Commander (sold separately) is required.

*2 Use when connected with an Optical Digital compatible Unit.




CAUTION

When using fiber cable, follow the guidelines below:

- When laying or bundling optic fiber cables, the minimum bending radius should be 30 mm. Bending beyond the radius will break the cable, resulting in no digital sound being output.
- Do not put the product or other items on the optic fiber cable.

Connecting an Ai-NET compatible AV Head Unit (IVA-D800R), ALPINE Navigation System, Ai-NET compatible Changer and External Amplifier

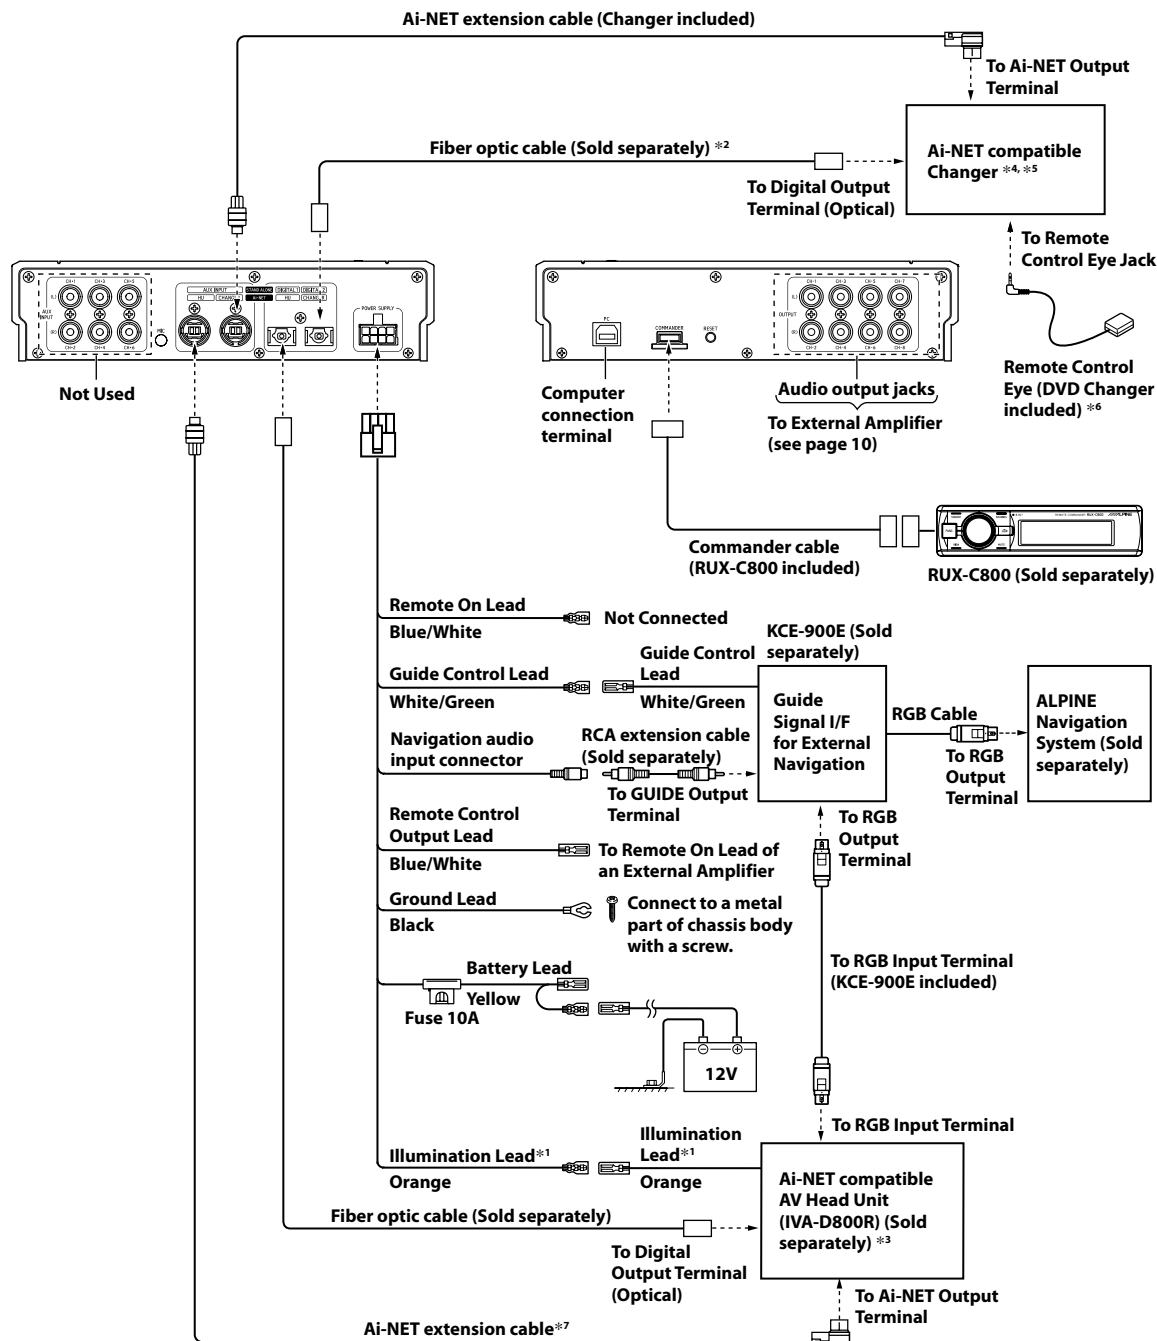

*1 Use when connected with the RUX-C800 Commander (sold separately).

*2 Use when connected with an Optical Digital compatible Changer.

*3 Set the system switch to [EQ/DIV] or [EXT AP]. For details, refer to the Owner's Manual for the product connected.

*4 Setting the system switch is required. For details, refer to the Owner's Manual for the connected changer.

*5 If the Ai-NET compatible Changer is a DVD Changer (DHA-S690 Series or DHA-S680 Series), do not connect its Switched Power Lead (Red).

*6 If the Ai-NET compatible Changer is a DVD Changer (DHA-S690 Series or DHA-S680 Series), do not connect the Remote Control Eye in a system that uses an Ai-NET compatible AV Head Unit. (Connection of the remote input cord (white/brown) is required.) Use the Remote Control Eye in a system that uses any other manufacturer's monitor. For details, refer to the connected DVD changer's instruction manual.

*7 If connecting DVA-5210, connect it between the unit and the head unit using an additional Ai-NET extension cable. In this case, also connect the audio output jacks (L=white/R=red) of DVA-5210 to the AUX INPUT CH-1 (L)/CH-2 (R) jacks of the unit.




CAUTION

When using fiber cable, follow the guidelines below:

- When laying or bundling optic fiber cables, the minimum bending radius should be 30 mm. Bending beyond the radius will break the cable, resulting in no digital sound being output.
- Do not put the product or other items on the optic fiber cable.

Connecting an Ai-NET compatible Head Unit, Ai-NET compatible Changer and External Amplifier

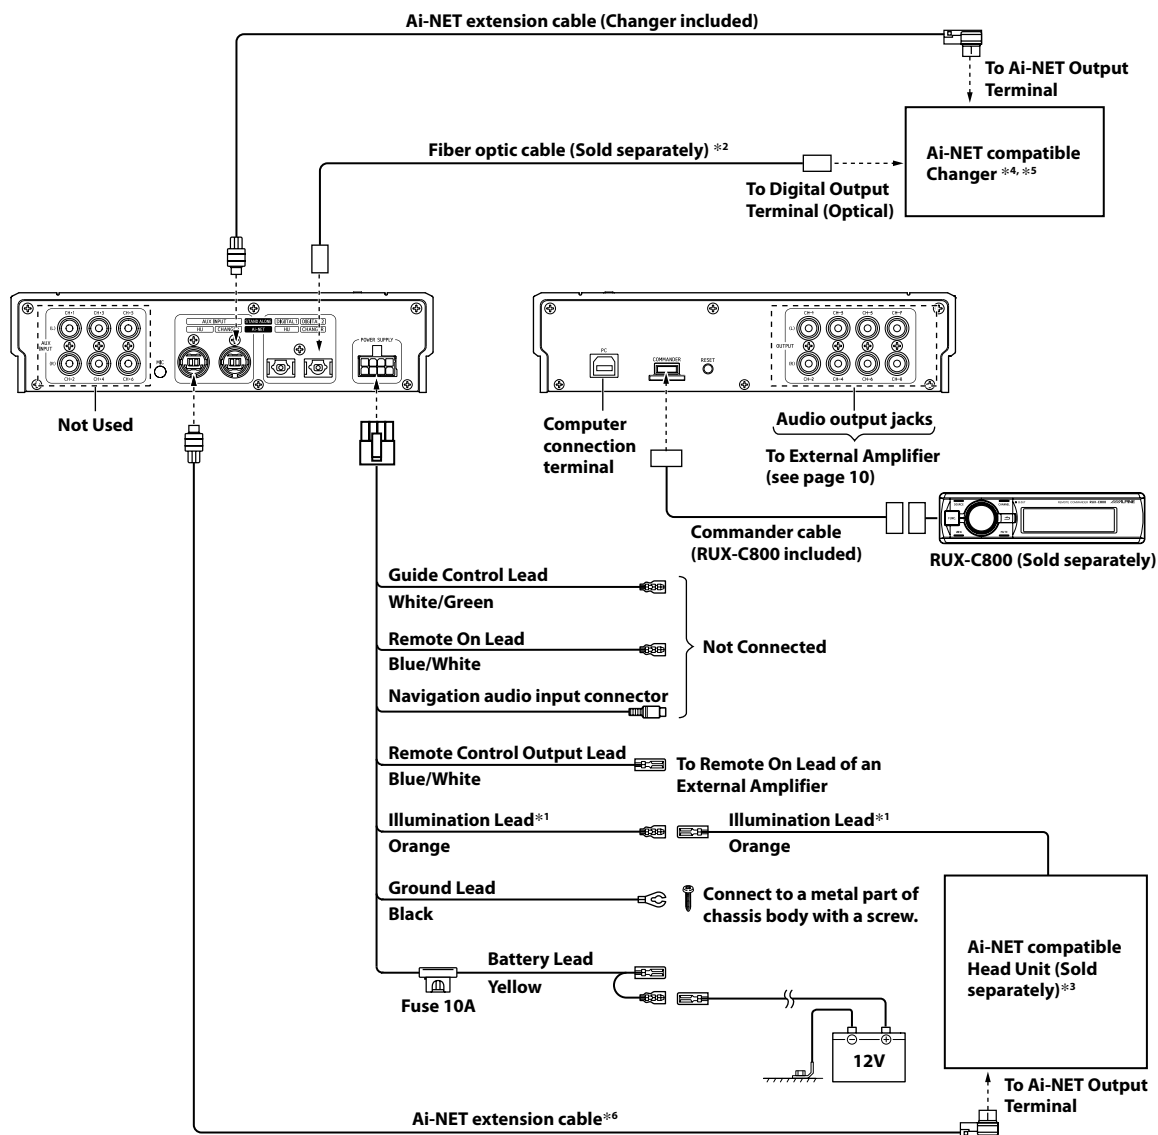

*1 Use when connected with the RUX-C800 Commander (sold separately).

*2 Use when connected with an Optical Digital compatible Changer.

*3 Checking and setting of the system switch are required. For details, refer to the Owner's Manual for the product connected.

*4 If connecting with an Optical Digital compatible Changer, setting the system switch is required. For details, refer to the Owner's Manual for the connected changer.

*5 If the Ai-NET compatible Changer is a DVD Changer (DHA-S690 Series or DHA-S680 Series), do not connect its Switched Power Lead (Red).

*6 If connecting DVA-5210, connect it between the unit and the head unit using an additional Ai-NET extension cable. In this case, also connect the audio output jacks (L=white/R=red) of DVA-5210 to the AUX INPUT CH-1 (L)/CH-2 (R) jacks of the unit.



CAUTION

When using fiber cable, follow the guidelines below:

- When laying or bundling optic fiber cables, the minimum bending radius should be 30 mm. Bending beyond the radius will break the cable, resulting in no digital sound being output.
- Do not put the product or other items on the optic fiber cable.


(3) PXA-H800 (General Foreign) Only

System Example

Connecting an automobile factory system (standard audio, etc.) and External Amplifier

■ Input Pattern: 4ch&2ch Input

AUX INPUT					
CH-1 (L)	CH-2 (R)	CH-3 (L)	CH-4 (R)	CH-5 (L)	CH-6 (R)
AUX1			AUX2		
FL (Front Left)	FR (Front Right)	RL (Rear Left)	RR (Rear Right)	L (Left)	R (Right)

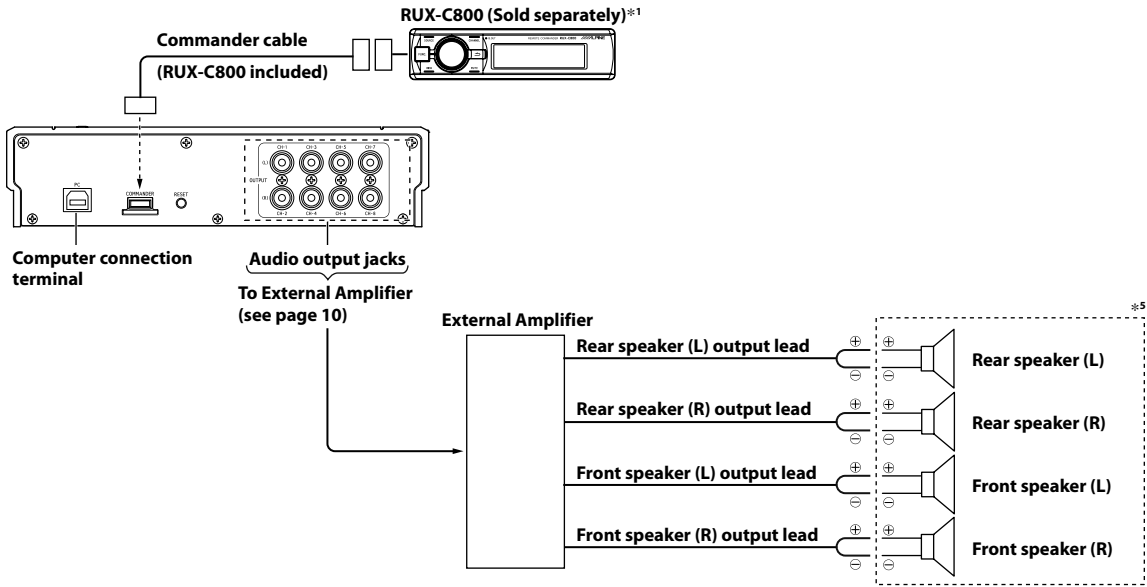


*1 When using a factory car audio system, the RUX-C800 Commander (sold separately) is required.


*2 If your factory system does not have a Remote Turn-On Lead, connect a cable that enables an incoming power supply (accessory power) in the ACC position.

*3 If using the Speaker-RCA Conversion cable, up to 6 channels can be input. Make connections according to your system.

*4 Before using the Speaker-RCA Conversion cable, remove the cord tip coating, cut the cord into 2 cables, connect the cable with commercially available bullet or solderless terminals attached to the tips.



*5 When connecting a speaker input cable, connect via a solderless terminal or solderless connector after disconnecting the automobile's speaker cable.




CAUTION

Make sure to disconnect the factory speakers and the speaker output cable for the factory system.


When using fiber cable, follow the guidelines below:

- When laying or bundling optic fiber cables, the minimum bending radius should be 30 mm. Bending beyond the radius will break the cable, resulting in no digital sound being output.
- Do not put the product or other items on the optic fiber cable.

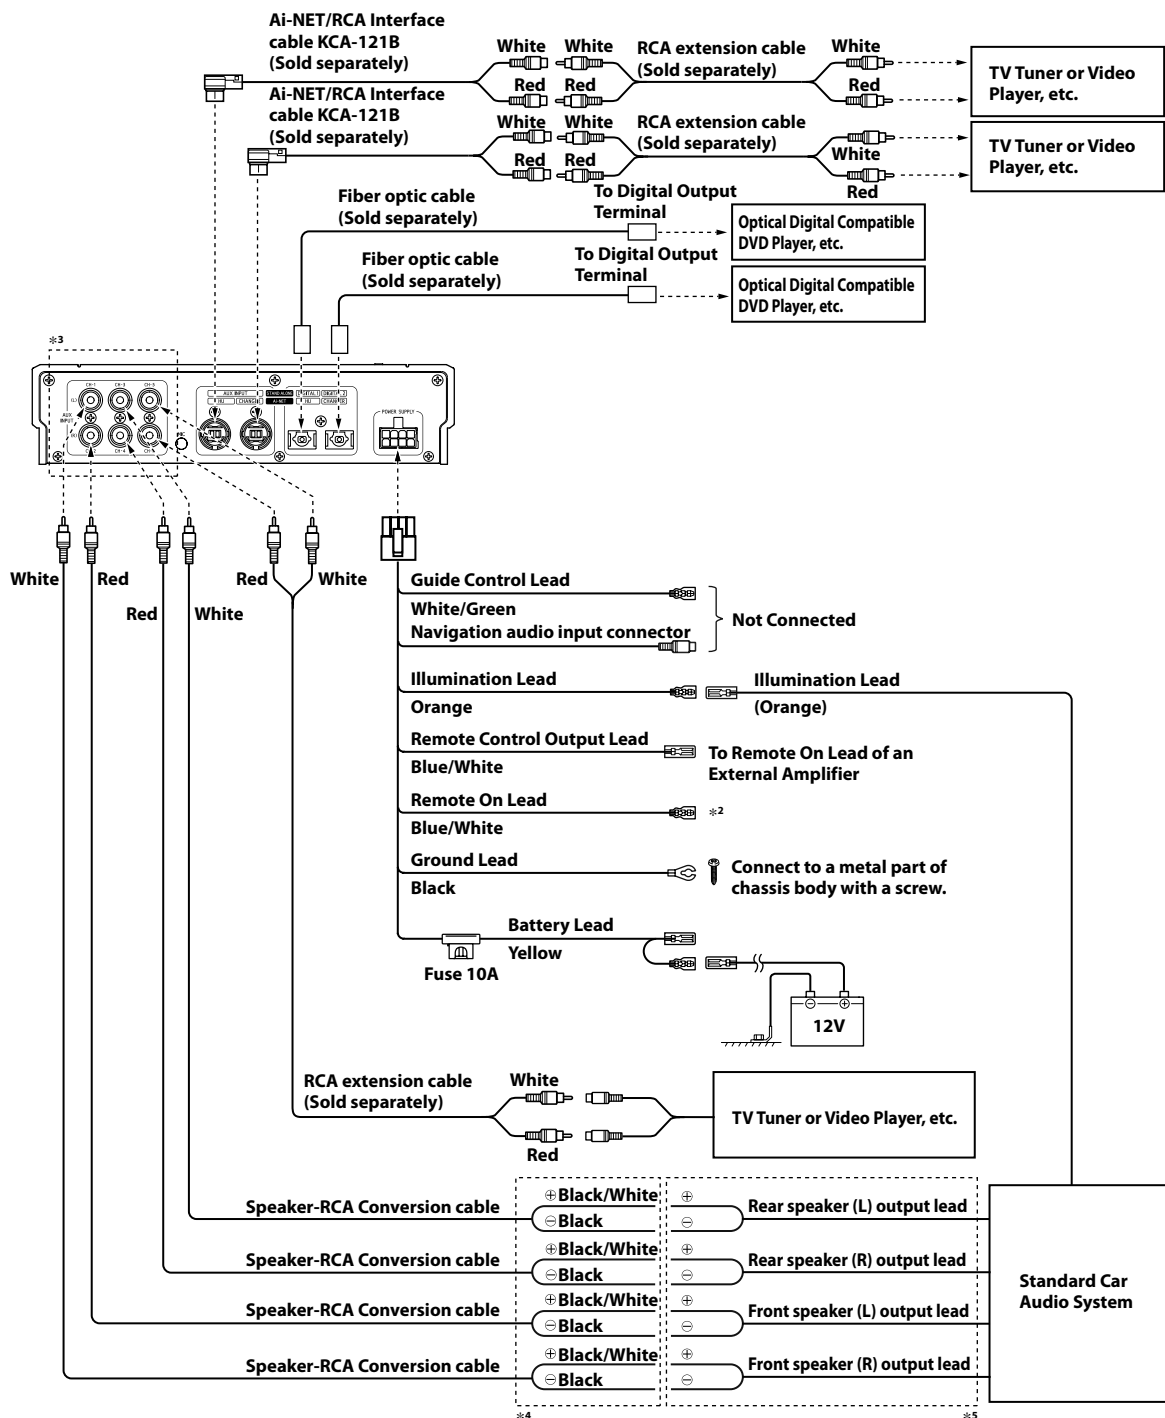

Connecting a Non Ai-NET AV Head Unit, External Input and External Amplifier

Input Pattern : 5.1ch Input

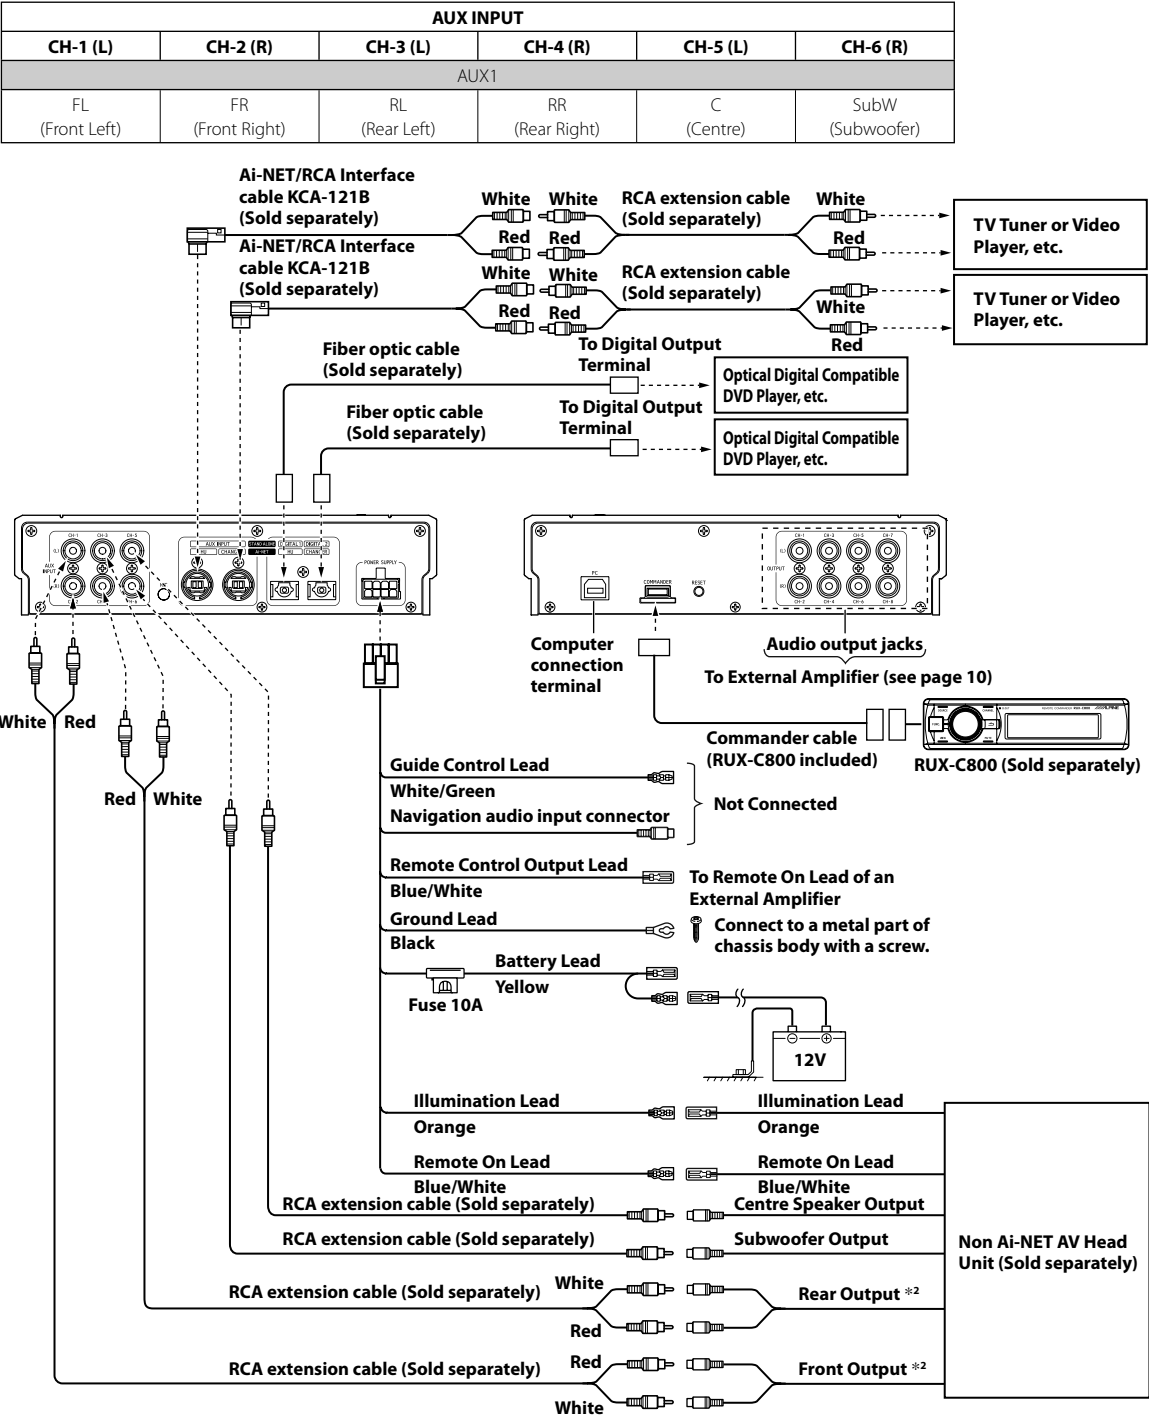

*1 When using a head unit that is not Ai-NET compatible, the RUX-C800 Commander (sold separately) is required.


CAUTION

When using fiber cable, follow the guidelines below:

- When laying or bundling optic fiber cables, the minimum bending radius should be 30 mm. Bending beyond the radius will break the cable, resulting in no digital sound being output.
- Do not put the product or other items on the optic fiber cable.

Connecting a Non Ai-NET Head Unit, External Input and External Amplifier

Input Pattern : 2ch×3 Input

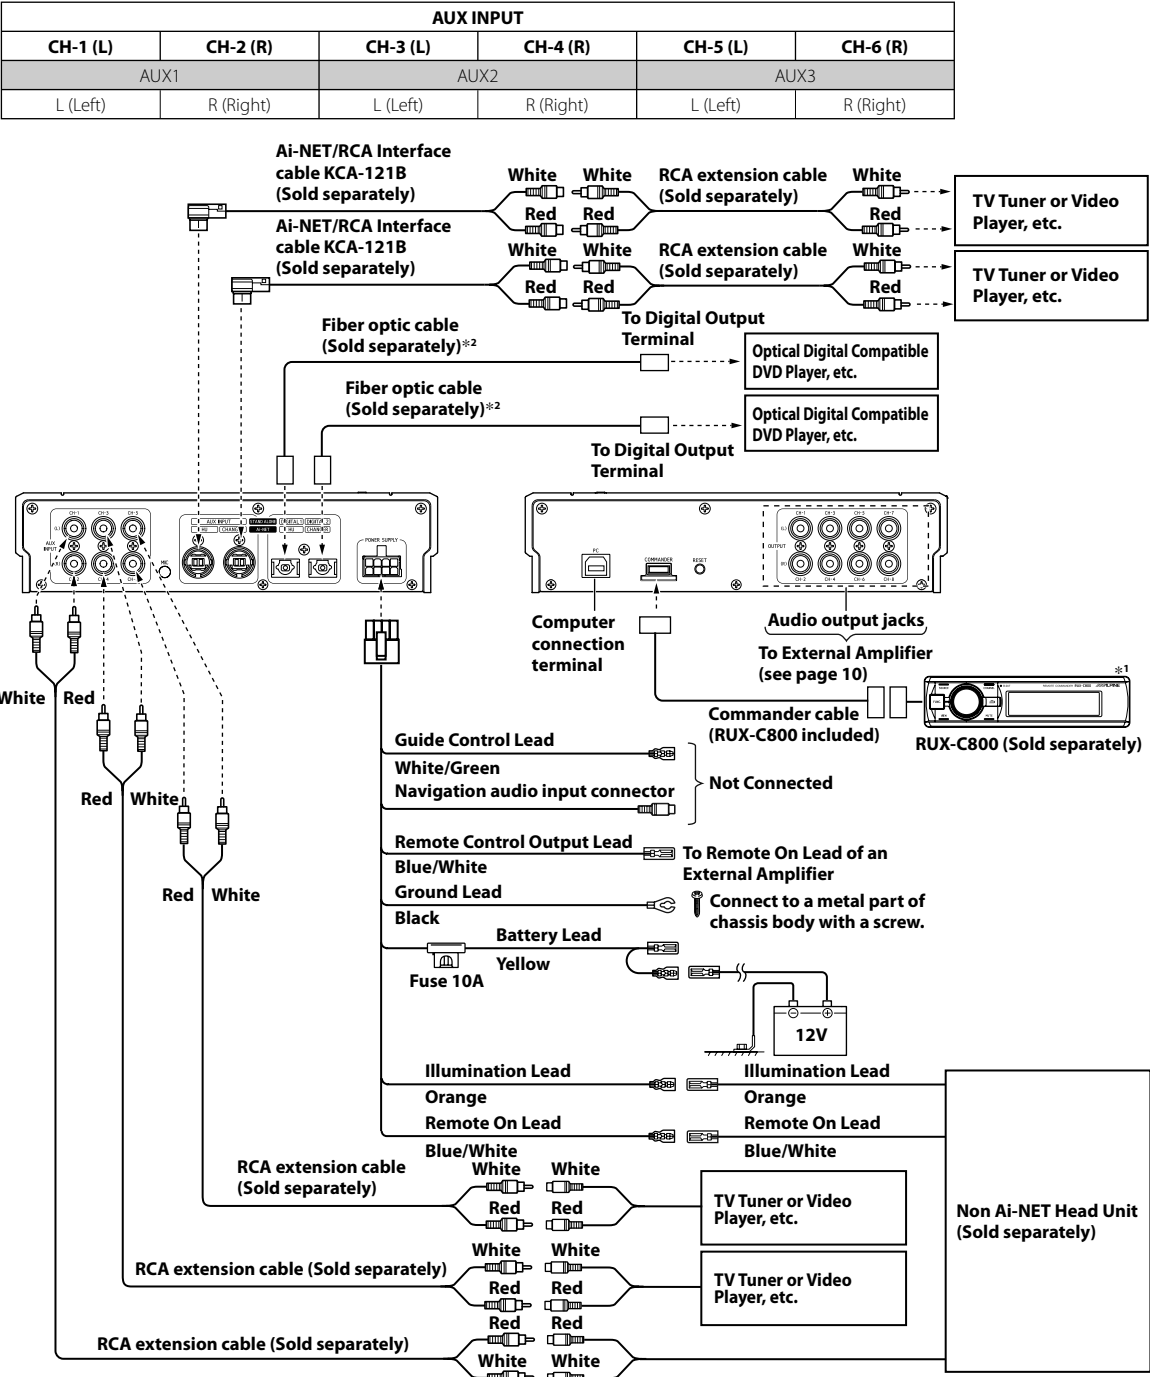

*1 When using a head unit that is not Ai-NET compatible, the RUX-C800 Commander (sold separately) is required.

*2 Use when connected with an Optical Digital compatible Unit.




CAUTION

When using fiber cable, follow the guidelines below:

- When laying or bundling optic fiber cables, the minimum bending radius should be 30 mm. Bending beyond the radius will break the cable, resulting in no digital sound being output.
- Do not put the product or other items on the optic fiber cable.

Connecting an Ai-NET compatible AV Head Unit (IVA-D800 series), ALPINE Navigation System, Ai-NET compatible Changer and External Amplifier

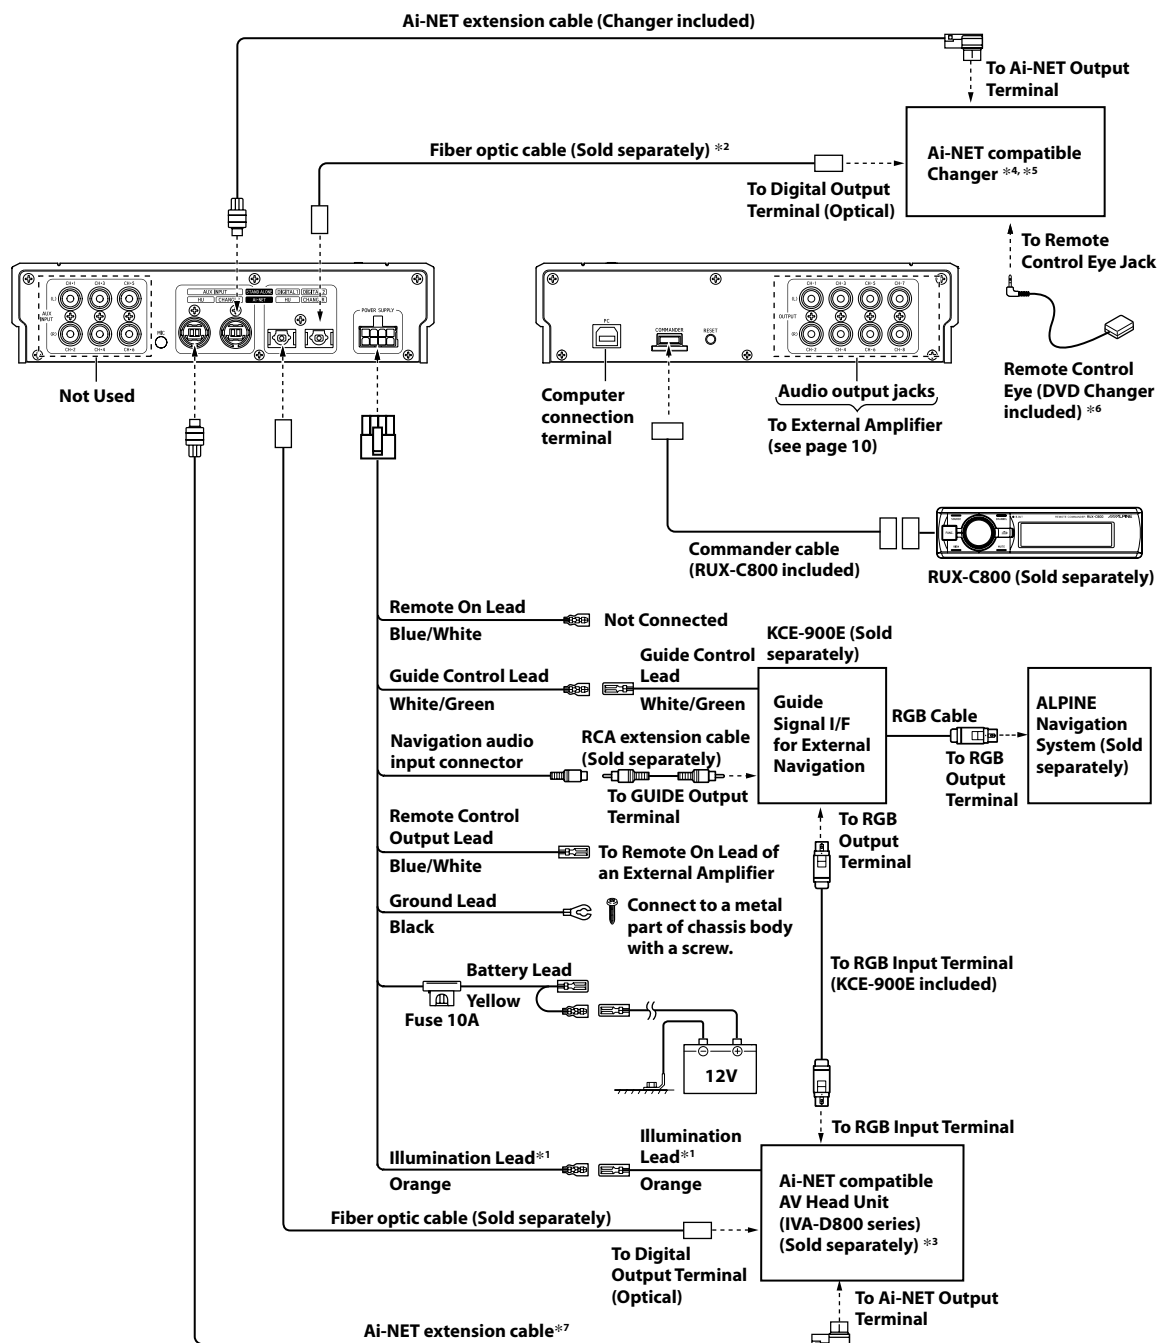

*1 Use when connected with the RUX-C800 Commander (sold separately).

*2 Use when connected with an Optical Digital compatible Changer.

*3 Set the system switch to [EQ/DIV] or [EXT AP]. For details, refer to the Owner's Manual for the product connected.

*4 Setting the system switch is required. For details, refer to the Owner's Manual for the connected changer.

*5 If the Ai-NET compatible Changer is a DVD Changer (DHA-S690 Series or DHA-S680 Series), do not connect its Switched Power Lead (Red).

*6 If the Ai-NET compatible Changer is a DVD Changer (DHA-S690 Series or DHA-S680 Series), do not connect the Remote Control Eye in a system that uses an Ai-NET compatible AV Head Unit. (Connection of the remote input cord (white/brown) is required.) Use the Remote Control Eye in a system that uses any other manufacturer's monitor. For details, refer to the connected DVD changer's instruction manual.

*7 If connecting DVA-5210, connect it between the unit and the head unit using an additional Ai-NET extension cable. In this case, also connect the audio output jacks (L=white/R=red) of DVA-5210 to the AUX INPUT CH-1 (L)/CH-2 (R) jacks of the unit.




CAUTION

When using fiber cable, follow the guidelines below:

- When laying or bundling optic fiber cables, the minimum bending radius should be 30 mm. Bending beyond the radius will break the cable, resulting in no digital sound being output.
- Do not put the product or other items on the optic fiber cable.

Connecting an Ai-NET compatible Head Unit, Ai-NET compatible Changer and External Amplifier

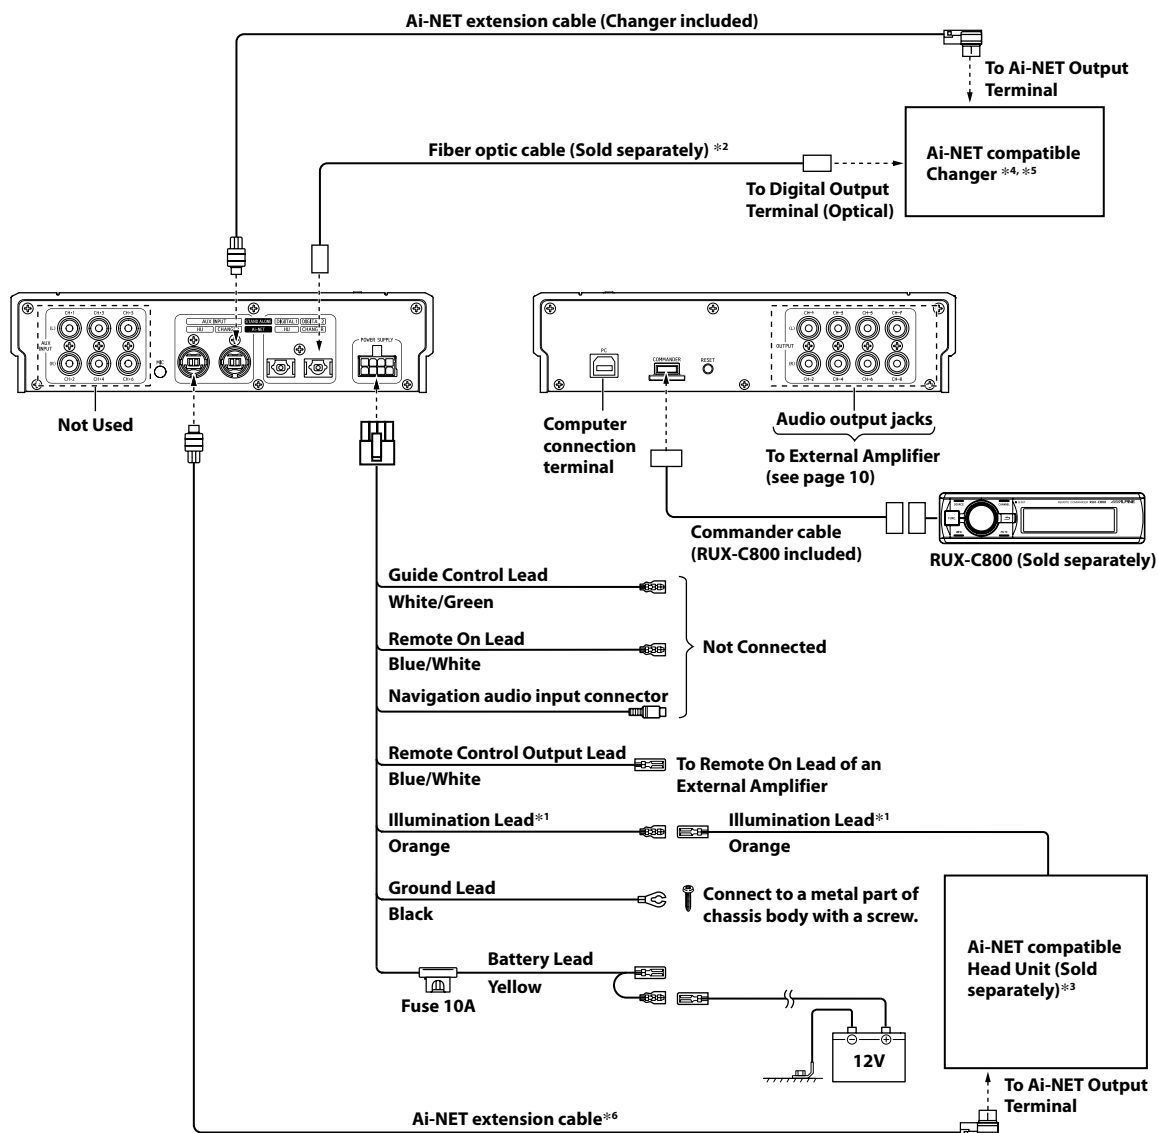

*1 Use when connected with the RUX-C800 Commander (sold separately).

*2 Use when connected with an Optical Digital compatible Changer.

*3 Checking and setting of the system switch are required. For details, refer to the Owner's Manual for the product connected.

*4 If connecting with an Optical Digital compatible Changer, setting the system switch is required. For details, refer to the Owner's Manual for the connected changer.

*5 If the Ai-NET compatible Changer is a DVD Changer (DHA-S690 Series or DHA-S680 Series), do not connect its Switched Power Lead (Red).

*6 If connecting DVA-5210, connect it between the unit and the head unit using an additional Ai-NET extension cable. In this case, also connect the audio output jacks (L=white/R=red) of DVA-5210 to the AUX INPUT CH-1 (L)/CH-2 (R) jacks of the unit.




CAUTION

When using fiber cable, follow the guidelines below:

- When laying or bundling optic fiber cables, the minimum bending radius should be 30 mm. Bending beyond the radius will break the cable, resulting in no digital sound being output.
- Do not put the product or other items on the optic fiber cable.

Extension Cable

(1) No Extension Cord needed.

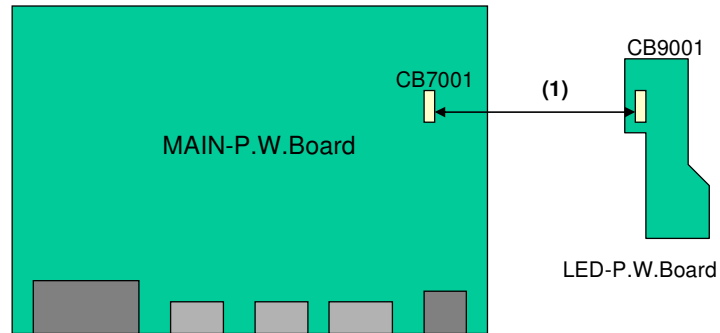

Specifications

1. TOTAL HARMONIC DISTORTION : (Volume STEP : 0dB, Analyzer filter : 22kHz LPF)

(1) DIGITAL INPUT MODE

INPUT	OUTPUT	SPEC
DIGITAL 1 (1kHz : 0dBFS)	CH1 - 8	0.02%
DIGITAL 2 (1kHz : 0dBFS)	CH3, 4	0.02%

(2) ANALOG INPUT MODE

INPUT	OUTPUT	SPEC
ANALOG 1 (100Hz, 1kHz, 6.3kHz : 2.0V input)	CH1 - 8	0.03%
ANALOG 2, 3 (1kHz : 2.0V input)	CH3, 4	0.03%
ANALOG 4, 5 (1kHz : 0.85V input)	CH3, 4	0.08%

2. OUTPUT LEVEL (Input Sensibility) : (Volume STEP : 0dB, Analyzer filter : 22kHz LPF)

(1) DIGITAL INPUT MODE

INPUT	OUTPUT	SPEC
DIGITAL 1 (1kHz : 0dBFS)	CH1 - 8	4.0V±2dB
DIGITAL 2 (1kHz : 0dBFS)	CH3, 4	4.0V±2dB

(2) ANALOG INPUT MODE

INPUT	OUTPUT	SPEC
ANALOG 1 - 3 (1kHz : 2.0V input)	CH3, 4	3.5V±2dB
ANALOG 4, 5 (1kHz : 0.85V input)	CH3, 4	3.3V±2dB

(3) NAVI MIX MODE

INPUT	OUTPUT	SPEC
DIGITAL 1 (- ∞ input) / Navi (1kHz : 0.85V input)	CH1,3,5,7	3.5V±2dB

(4) SPEAKER INPUT MODE

INPUT	OUTPUT	SPEC
ANALOG 1 - 3 (1kHz : 7.0V input)	CH3, 4	3.5V±2dB

3. RESIDUAL NOISE

1) Volume STEP : 0dB, Analyzer filter: JIS-A and 22kHz LPF

(1) DIGITAL INPUT MODE

INPUT	OUTPUT	SPEC
DIGITAL 1, 2 (- ∞ input)	CH1 - 8	20uV

(2) ANALOG INPUT MODE

INPUT	OUTPUT	SPEC
ANALOG 1 - 3 (short input)	CH1 - 8	50uV
ANALOG 4, 5 (short input)	CH3, 4	80uV

2) Volume STEP : 0dB, Analyzer filter: OFF

(1) DIGITAL INPUT MODE

INPUT	OUTPUT	SPEC
DIGITAL 1, 2 (- ∞ input)	CH1 - 8	1mV

(2) ANALOG INPUT MODE

INPUT	OUTPUT	SPEC
ANALOG 1 - 3 (short input)	CH3, 4	1mV
ANALOG 4, 5 (short input)	CH3, 4	1mV

4. FREQUENCY RESPONSE : (Volume STEP : 0dB, Analyzer filter: OFF)

REFERENCE LEVEL AT 1kHz 0dB

(1) DIGITAL INPUT MODE

INPUT	OUTPUT	SPEC
DIGITAL 1 (20Hz : 0dBFS)	CH1 - 8	-0.1±2dB
(20kHz : 0dBFS)	CH1 - 8	-0.1±2dB
DIGITAL 2 (20Hz : 0dBFS)	CH3, 4	-0.1±2dB

(20kHz : 0dBFS)	CH3, 4	-0.1±2dB
-----------------	--------	----------

(2) ANALOG INPUT MODE

INPUT	OUTPUT	SPEC
ANALOG 1 - 3 (20Hz : 2.0V input)	CH3, 4	-0.1±2dB
(20kHz : 2.0V input)	CH3, 4	-0.1±2dB
ANALOG 4, 5 (20Hz : 0.85V input)	CH3, 4	-0.1±2dB
(20kHz : 0.85V input)	CH3, 4	-0.1±2dB

5. CHANNEL SEPARATION : (Volume STEP : 0dB, Analyzer filter: 22kHz LPF)

(1) DIGITAL INPUT MODE

INPUT	OUTPUT	SPEC
DIGITAL 1 (100Hz : 0dBFS → -∞ input)	CH1,3,5,7 ⇔ 2,4,6,8	-85dB
(1kHz : 0dBFS → -∞ input)	CH1,3,5,7 ⇔ 2,4,6,8	-85dB
(10kHz : 0dBFS → -∞ input)	CH1,3,5,7 ⇔ 2,4,6,8	-80dB
DIGITAL 2 (100Hz : 0dBFS → -∞ input)	CH3 ⇔ 4	-85dB
(1kHz : 0dBFS → -∞ input)	CH3 ⇔ 4	-85dB
(10kHz : 0dBFS → -∞ input)	CH3 ⇔ 4	-80dB

(2) ANALOG INPUT MODE

INPUT	OUTPUT	SPEC
ANALOG 1 (100Hz : 2.0V → short input)	CH1,3,5,7 ⇔ 2,4,6,8	-80dB
(1kHz : 2.0V → short input)	CH1,3,5,7 ⇔ 2,4,6,8	-80dB
(10kHz : 2.0V → short input)	CH1,3,5,7 ⇔ 2,4,6,8	-75dB
ANALOG 2, 3 (100Hz : 2.0V → short input)	CH3 ⇔ 4	-80dB
(1kHz : 2.0V → short input)	CH3 ⇔ 4	-80dB
(10kHz : 2.0V → short input)	CH3 ⇔ 4	-75dB
ANALOG 4, 5 (100Hz : 0.85V → short input)	CH3 ⇔ 4	-70dB
(1kHz : 0.85V → short input)	CH3 ⇔ 4	-70dB
(10kHz : 0.85V → short input)	CH3 ⇔ 4	-65dB

6. CHANNEL CROSSTALK : (Volume STEP : 0dB, Analyzer filter: 22kHz LPF)

(1) ANALOG INPUT MODE

INPUT	OUTPUT	SPEC
ANALOG 1 - 3 (10kHz : 2.0V → short input)	CH1 - 8	-75dB

7. MUTE CHARACTERISTIC : (Volume STEP : 0dB, Analyzer filter: 22kHz LPF)

(1) DIGITAL INPUT MODE

INPUT	OUTPUT	SPEC
DIGITAL 1 (1kHz : 0dBFS Mute Off → Mute On)	CH1 - 8	-50dB

8. MICROPHONE LEVEL : (Volume STEP : 0dB, Analyzer filter: 22kHz LPF)

INPUT	OUTPUT	SPEC
MIC (1kHz : 50mV input)	CH2,4,6,8	2.8V±2dB

9. REMOTE ON VOLTAGE

SPEC
7.2±1V

10. REMOTE OUT VOLTAGE (REMOTE ON, BATT=14.4V, Load=10kohm)

Remote Out Voltage Level

SPEC
13.8V

11. SYSTEM CURRENT CONSUMPTION : (Volume STEP : 0dB, Digital 1 Input Mode)

(1) ACC and POWER ON

	SPEC
Normal Operation with Commander	1.5A
Power off with Commander	1.2A

(2) Remote Current

Remote voltage = 14.4V

SPEC

0.77mA

(3) ACC OFF (Buck up current)
Standby-In (2min wait)


SPEC
1.5mA

12. GENERAL


Power Supply	DC14.4V (10.0~16.0V)
Dimensions (W x H x D)	169 x 50.8 x 215mm
Weight	1.35kg

NOTE : Due to Continuing product improvement, specifications and designs are subject to change without notice.


Block Diagram

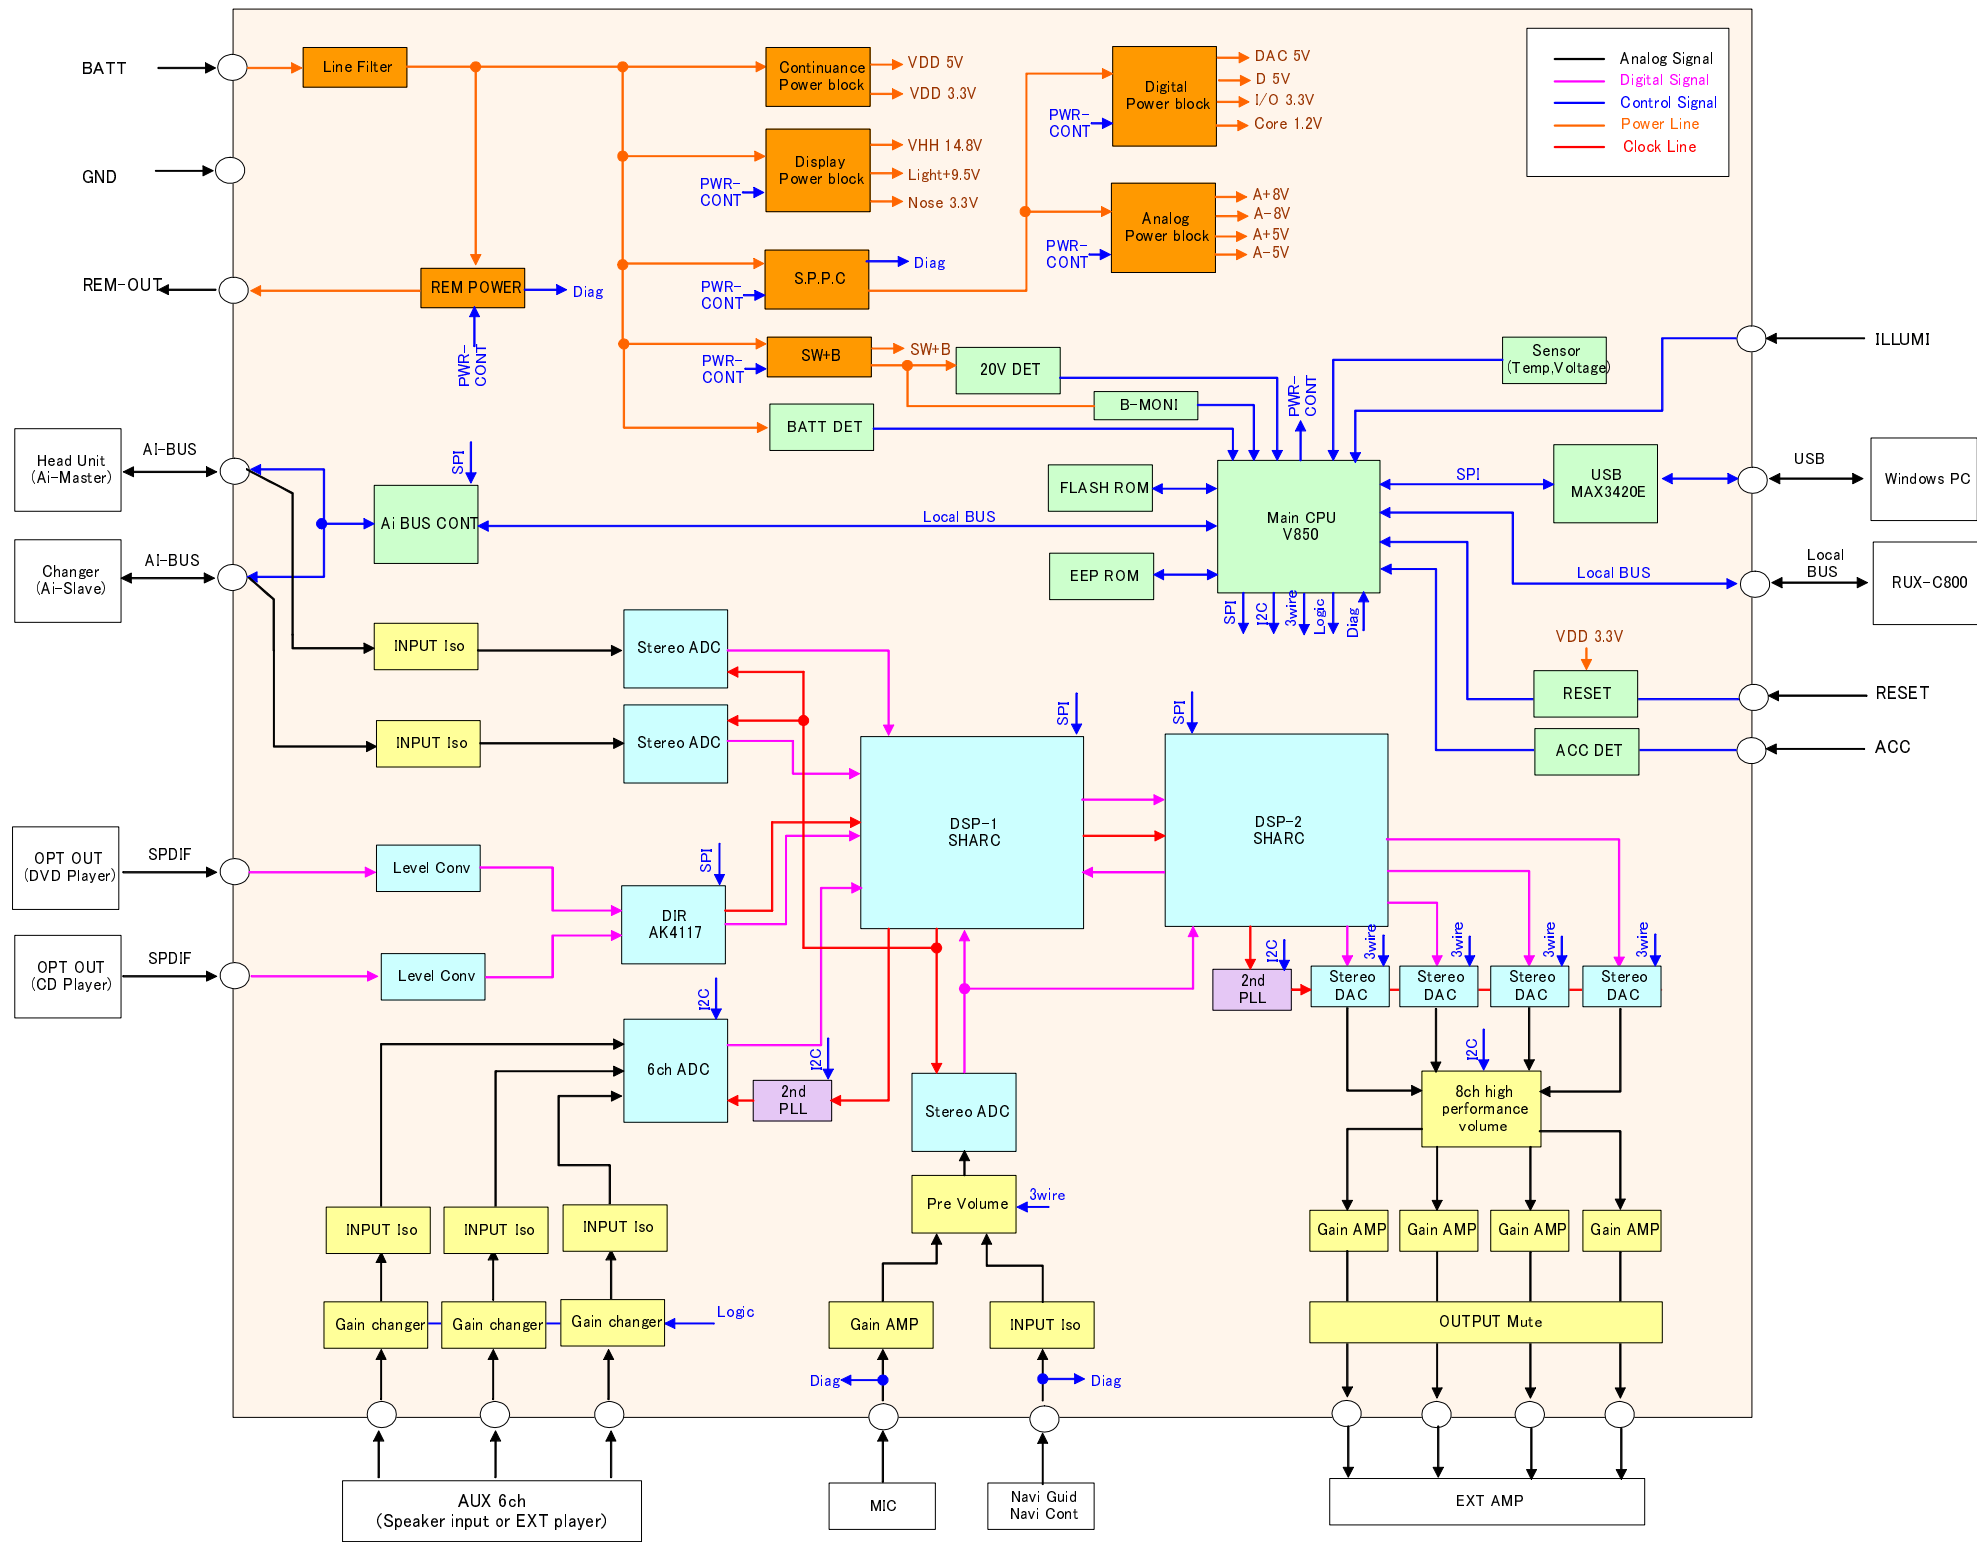




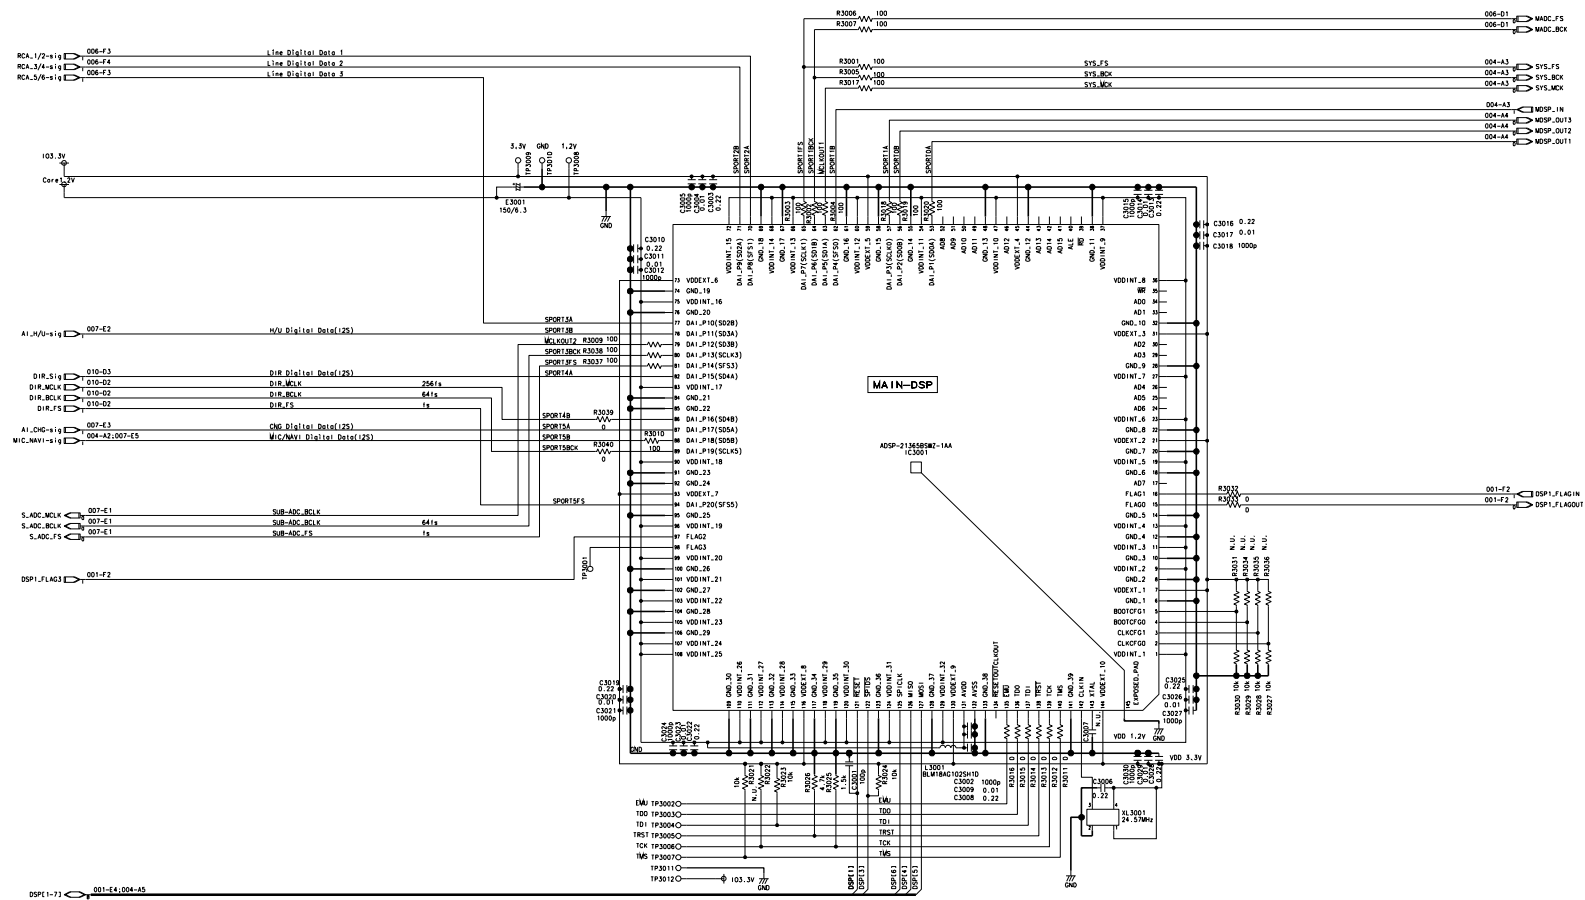


NOTE:N.U.is Not Used Parts.

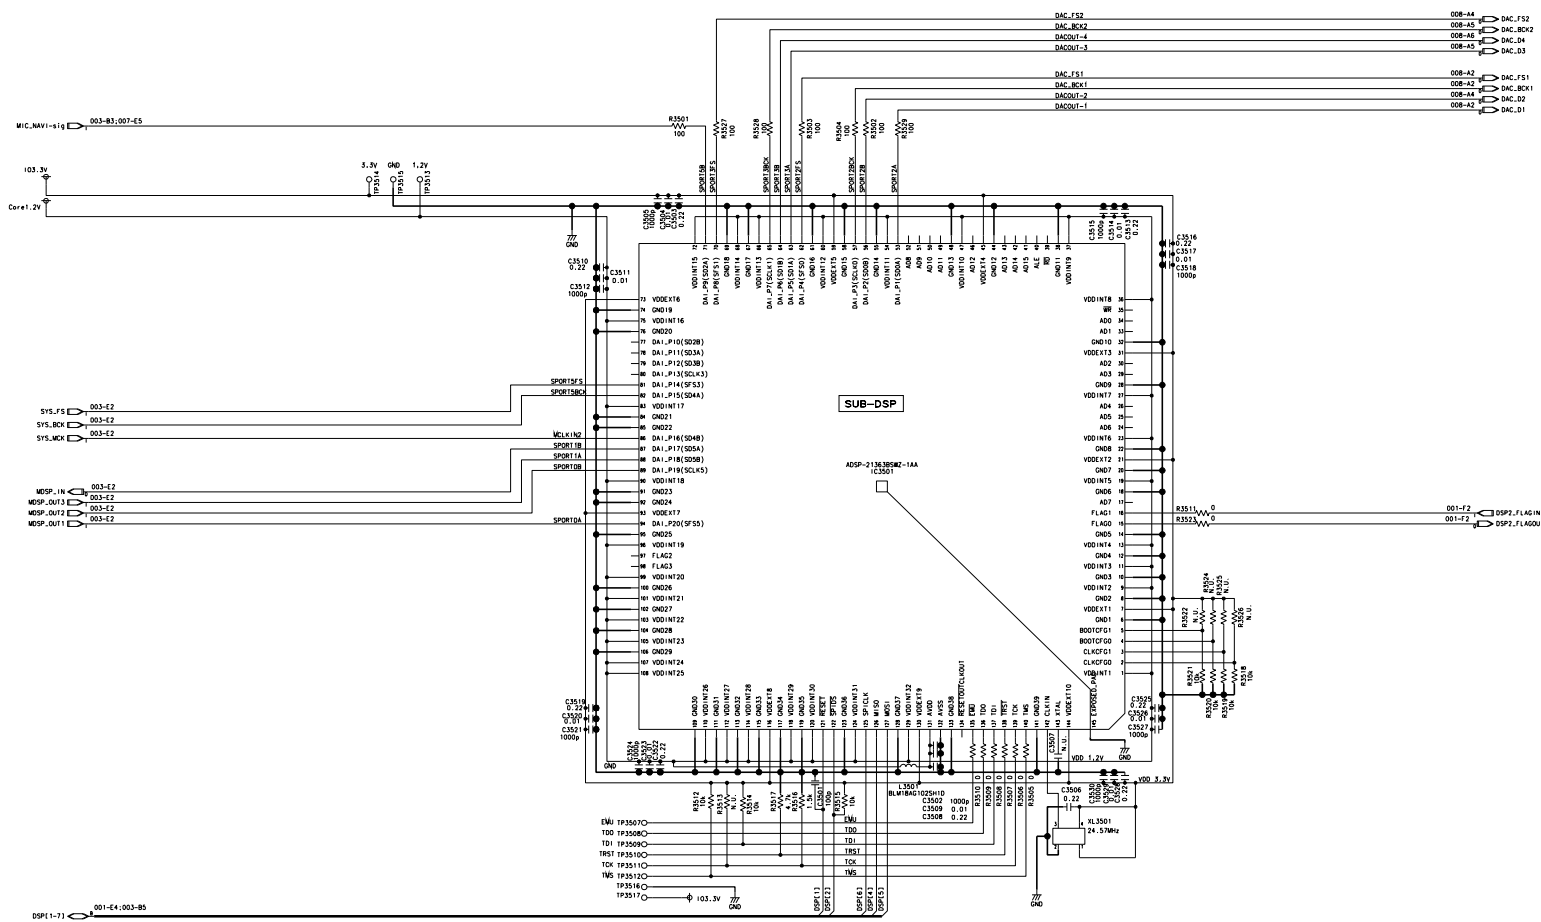


NOTE:N.U.is Not Used Parts.

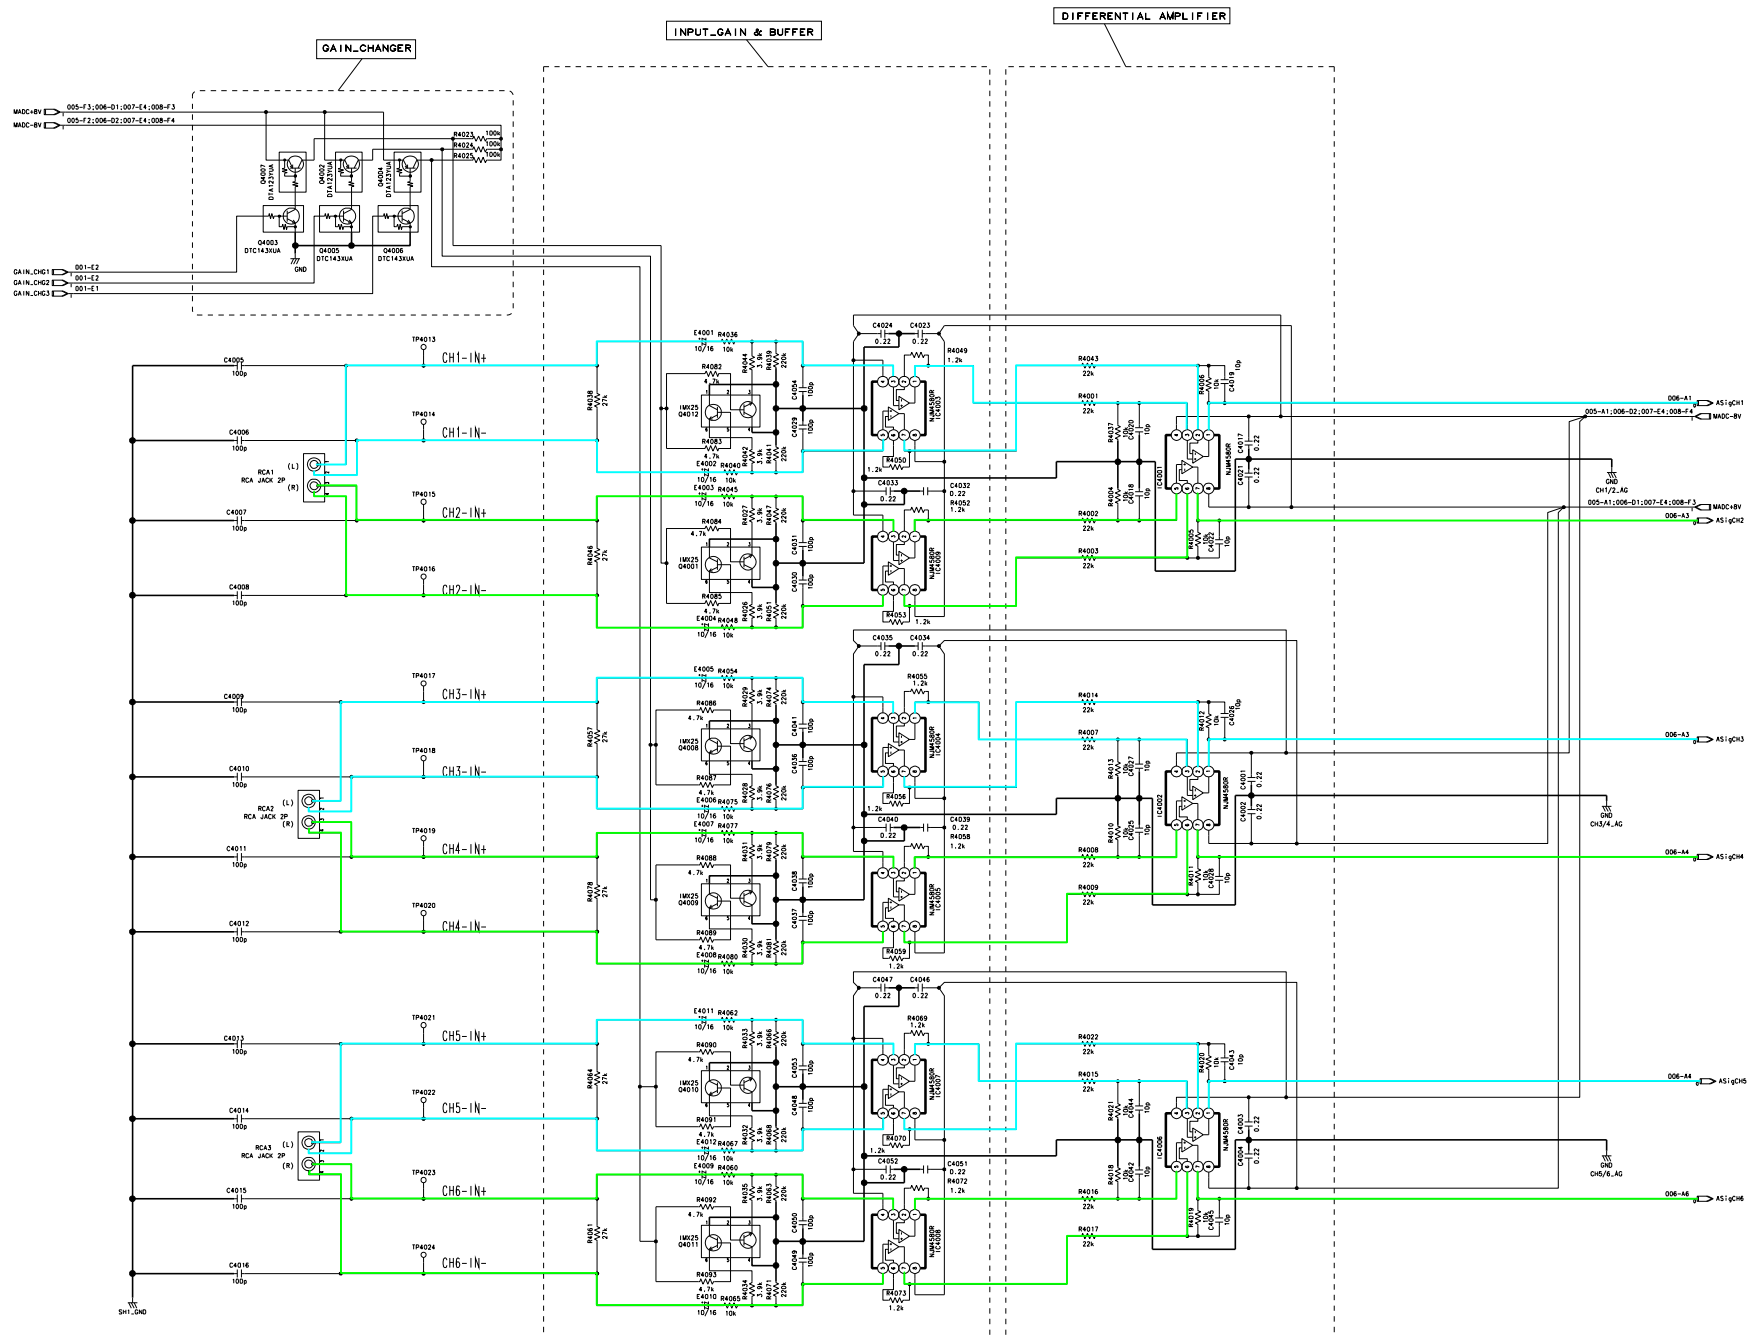








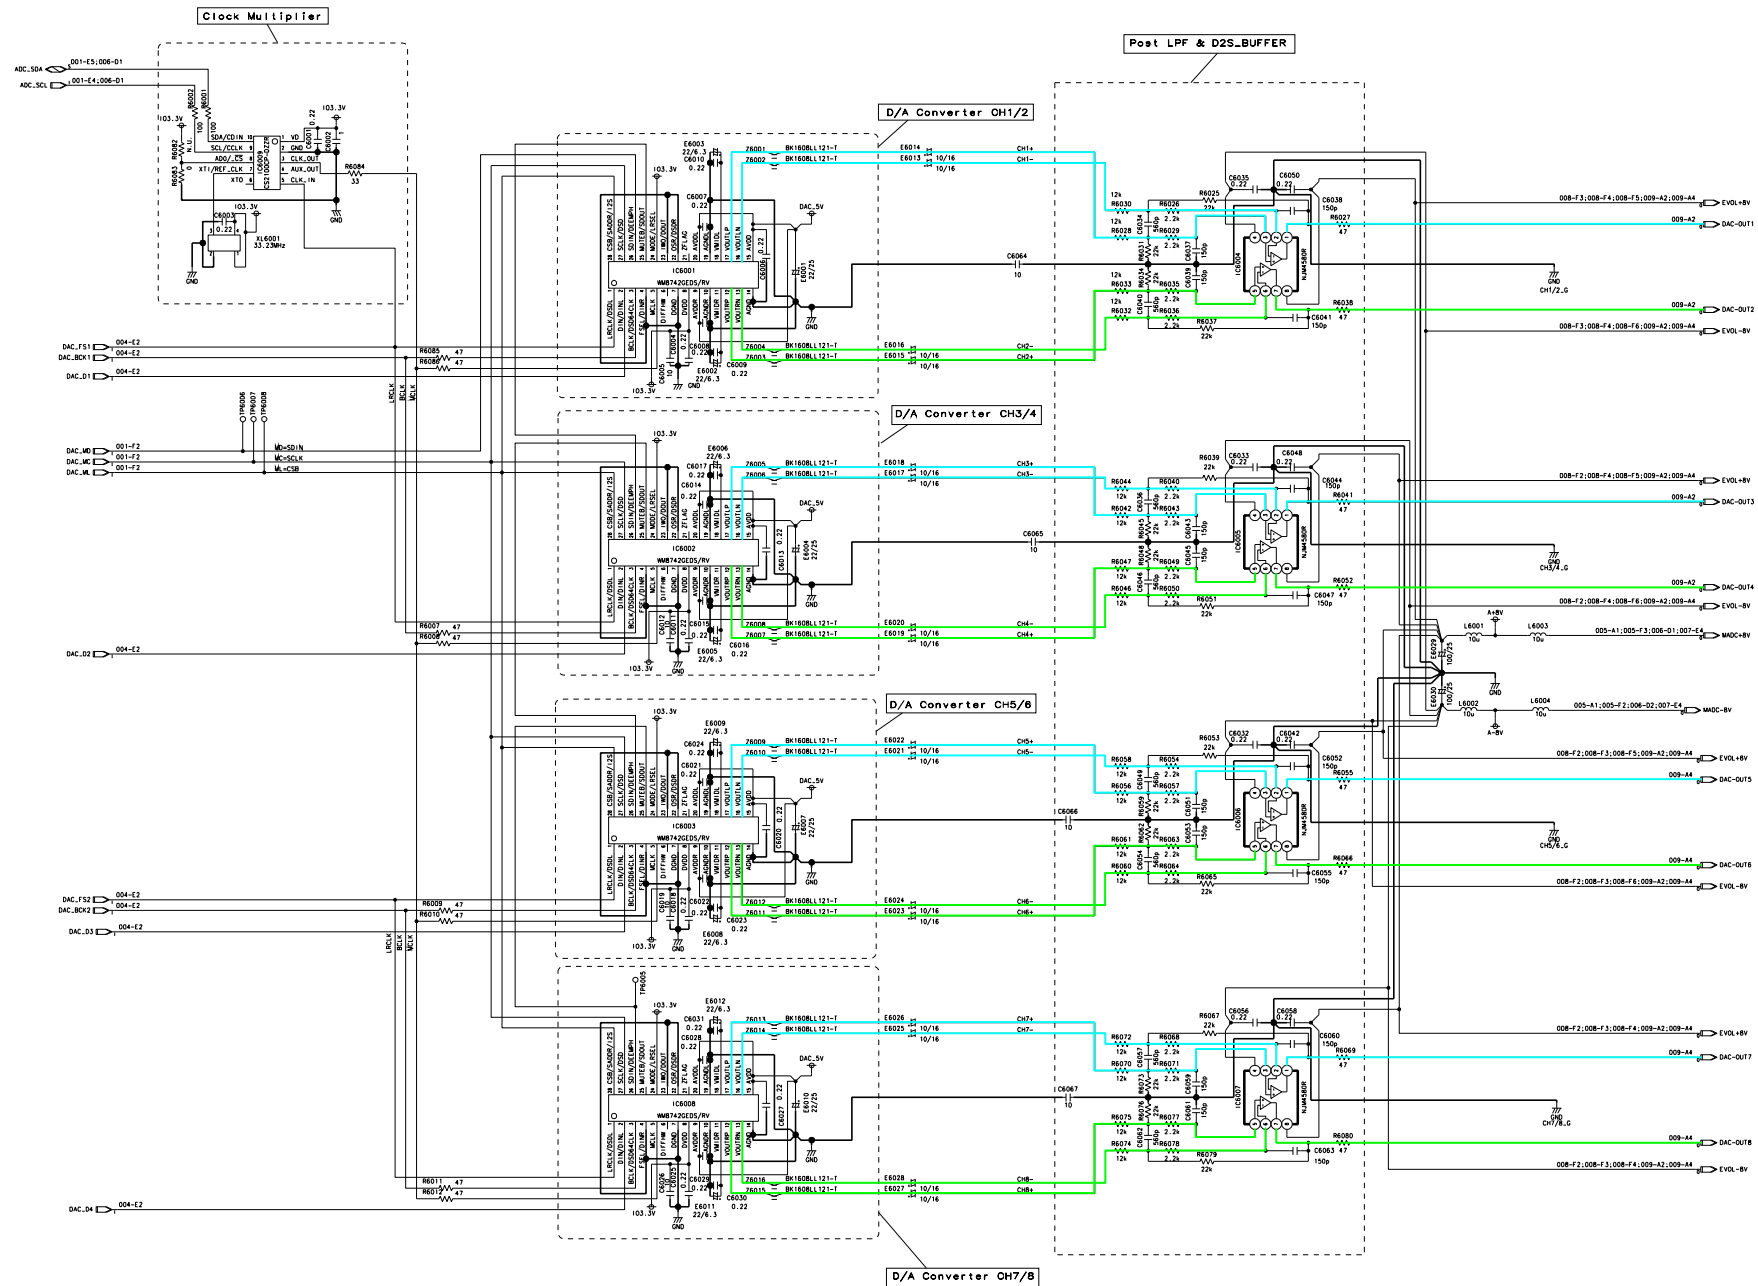

NOTE:N.U.is Not Used Parts.

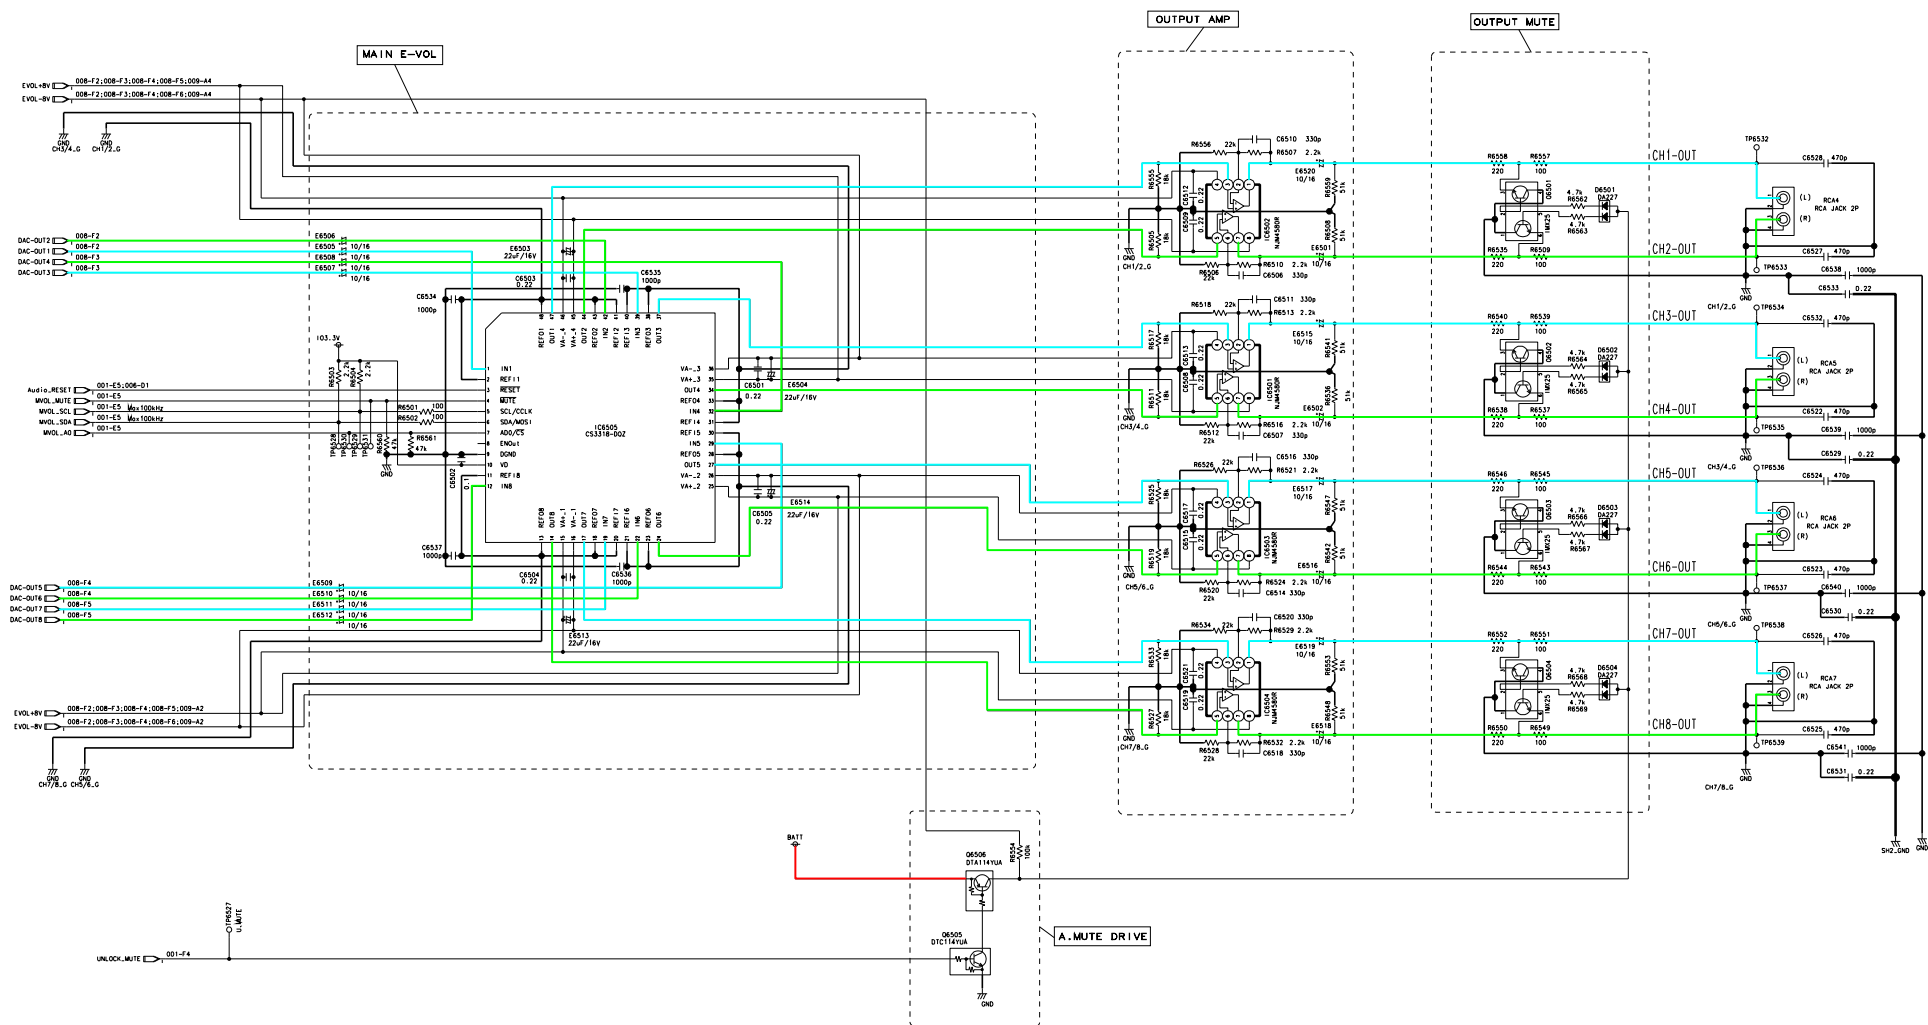


NOTE:N.U.is Not Used Parts.

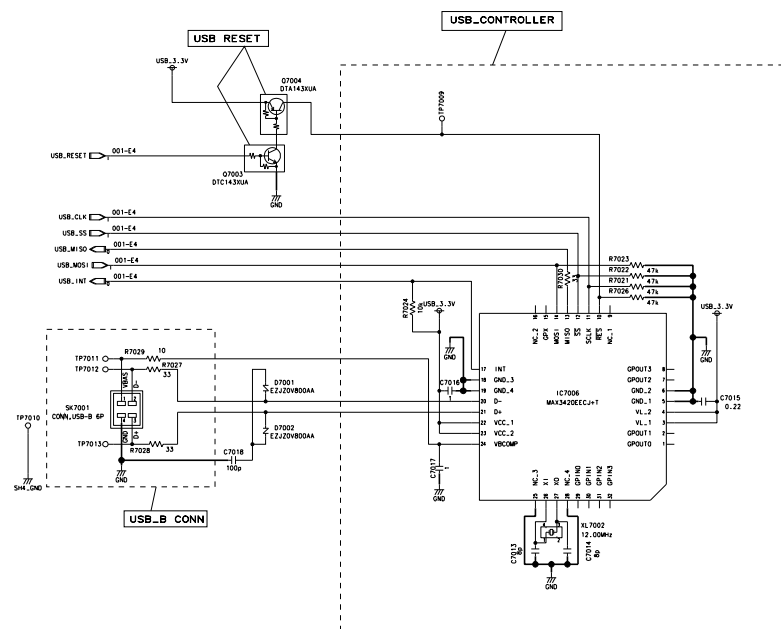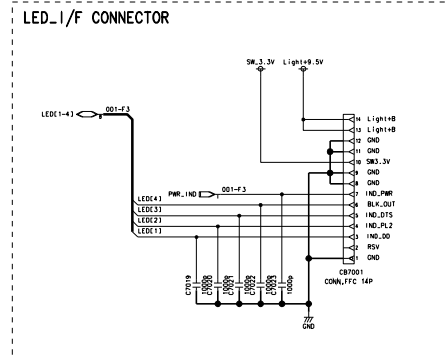


NOTE:N.U.is Not Used Parts.




LED POWER Circuit

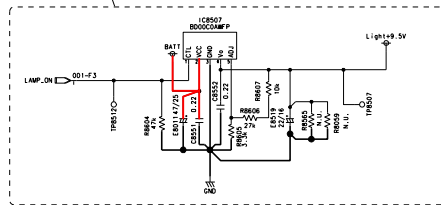


FRONT3.3V Circuit

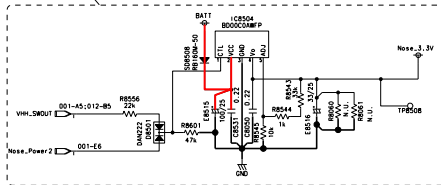


VHH 15V Circuit

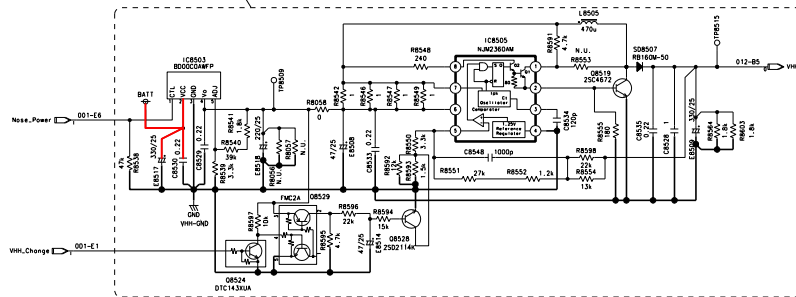


VHH SW & Protection

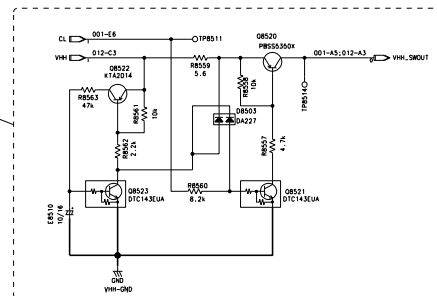


Batt SW

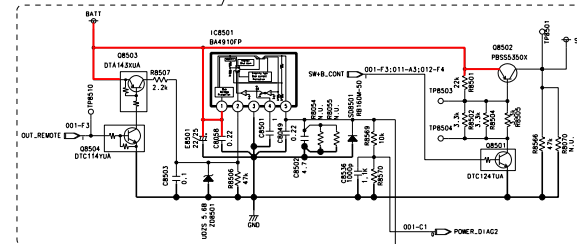


Navi-Control

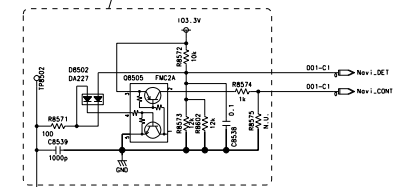


Stable_Primary_Power_Circuit

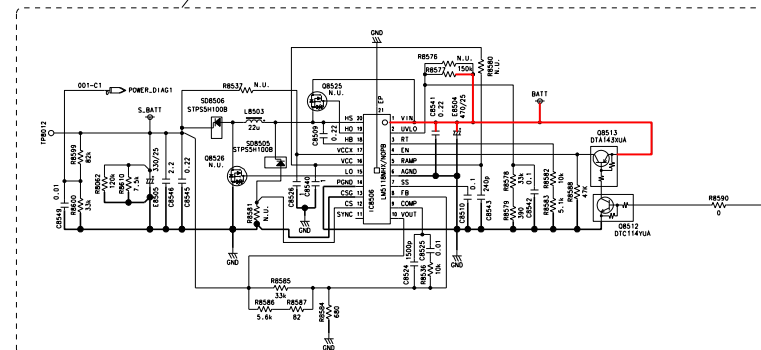

+5V/-5V POWER Circuit

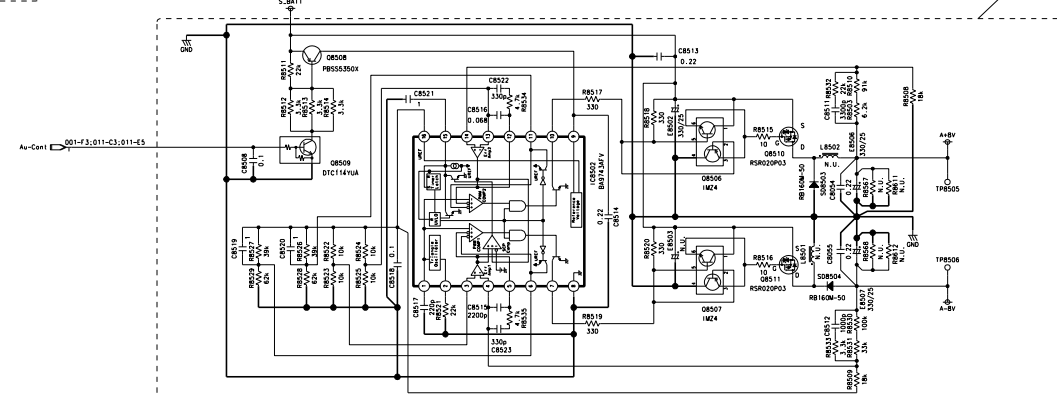


MAIN-P.W.Board

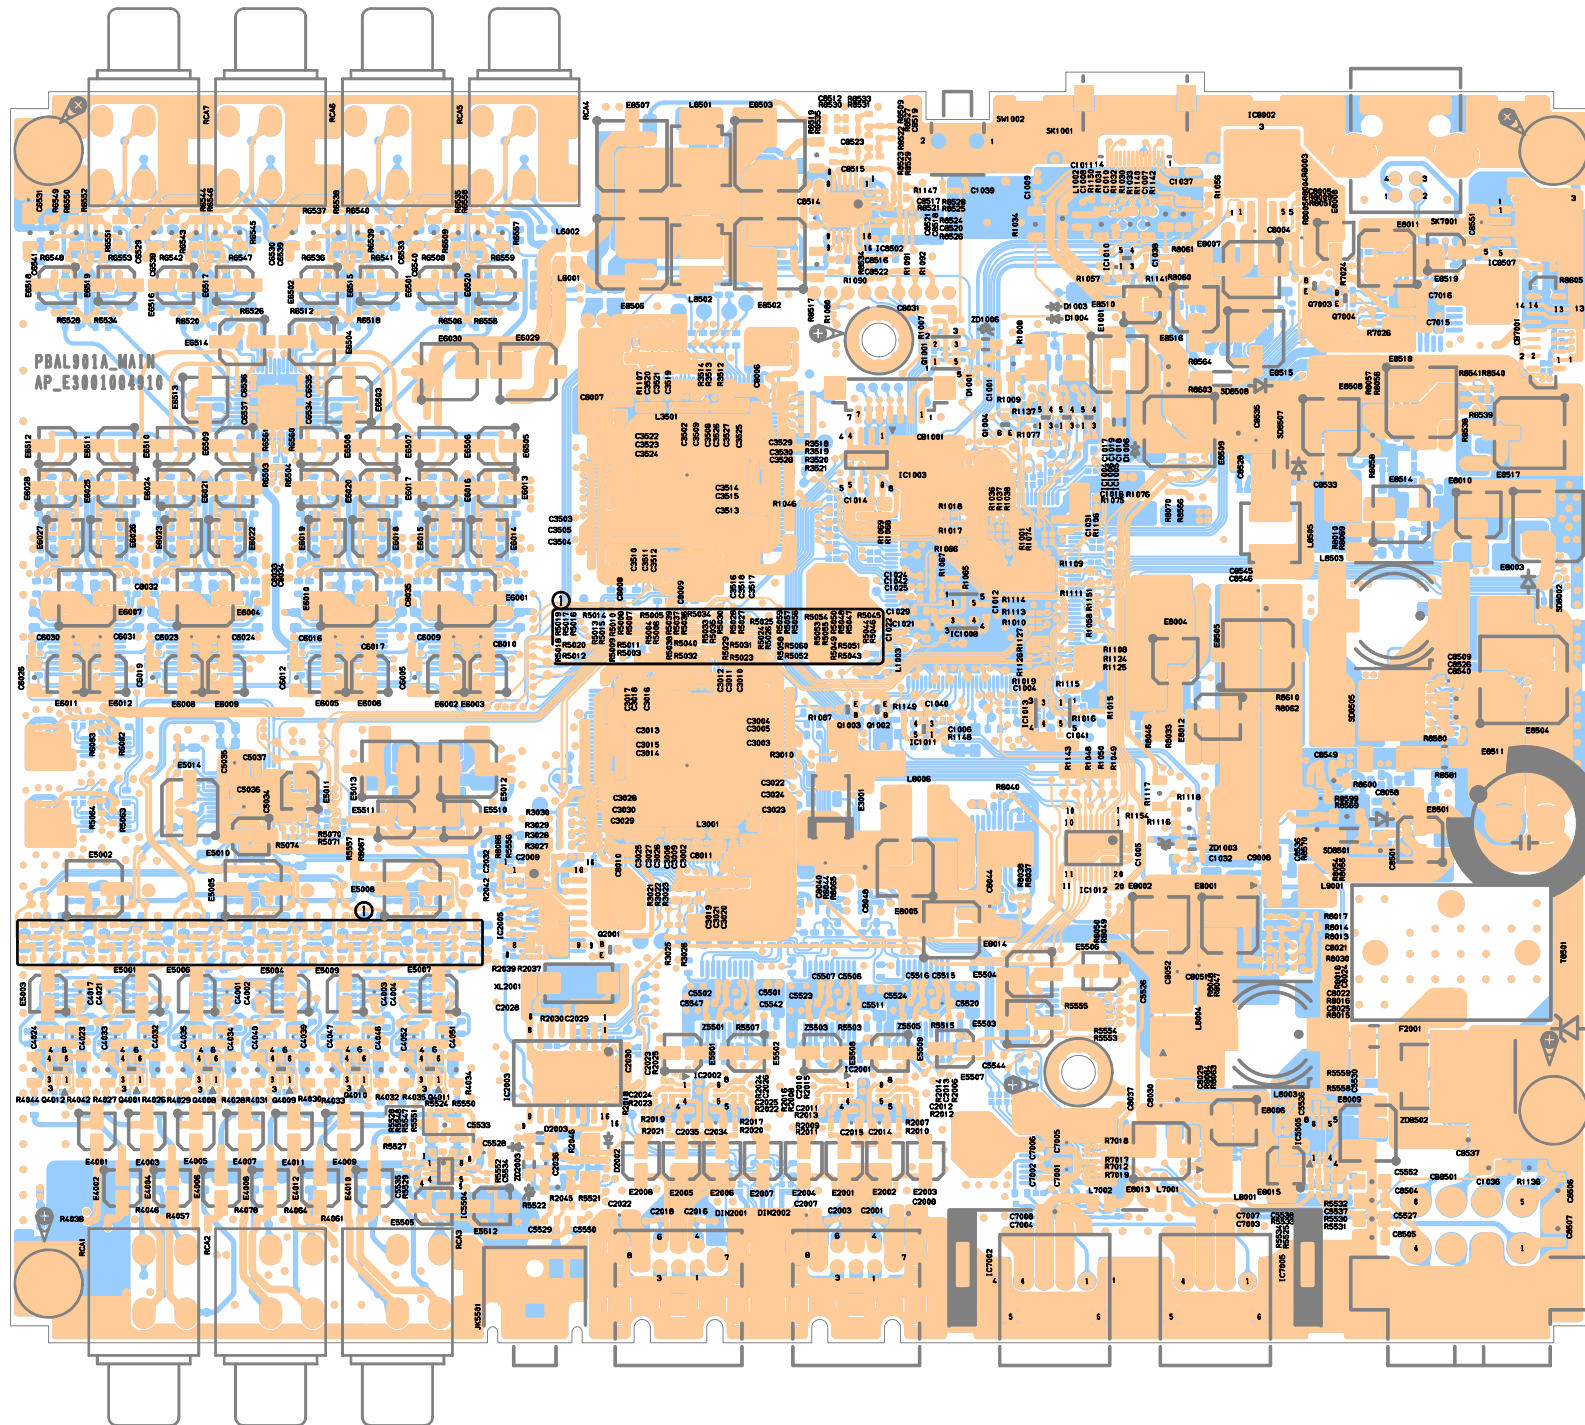


Orange Color Pattern:Component Side Pattern


Blue Color Pattern:Feil Side Pattern

MAIN-P.W.Board

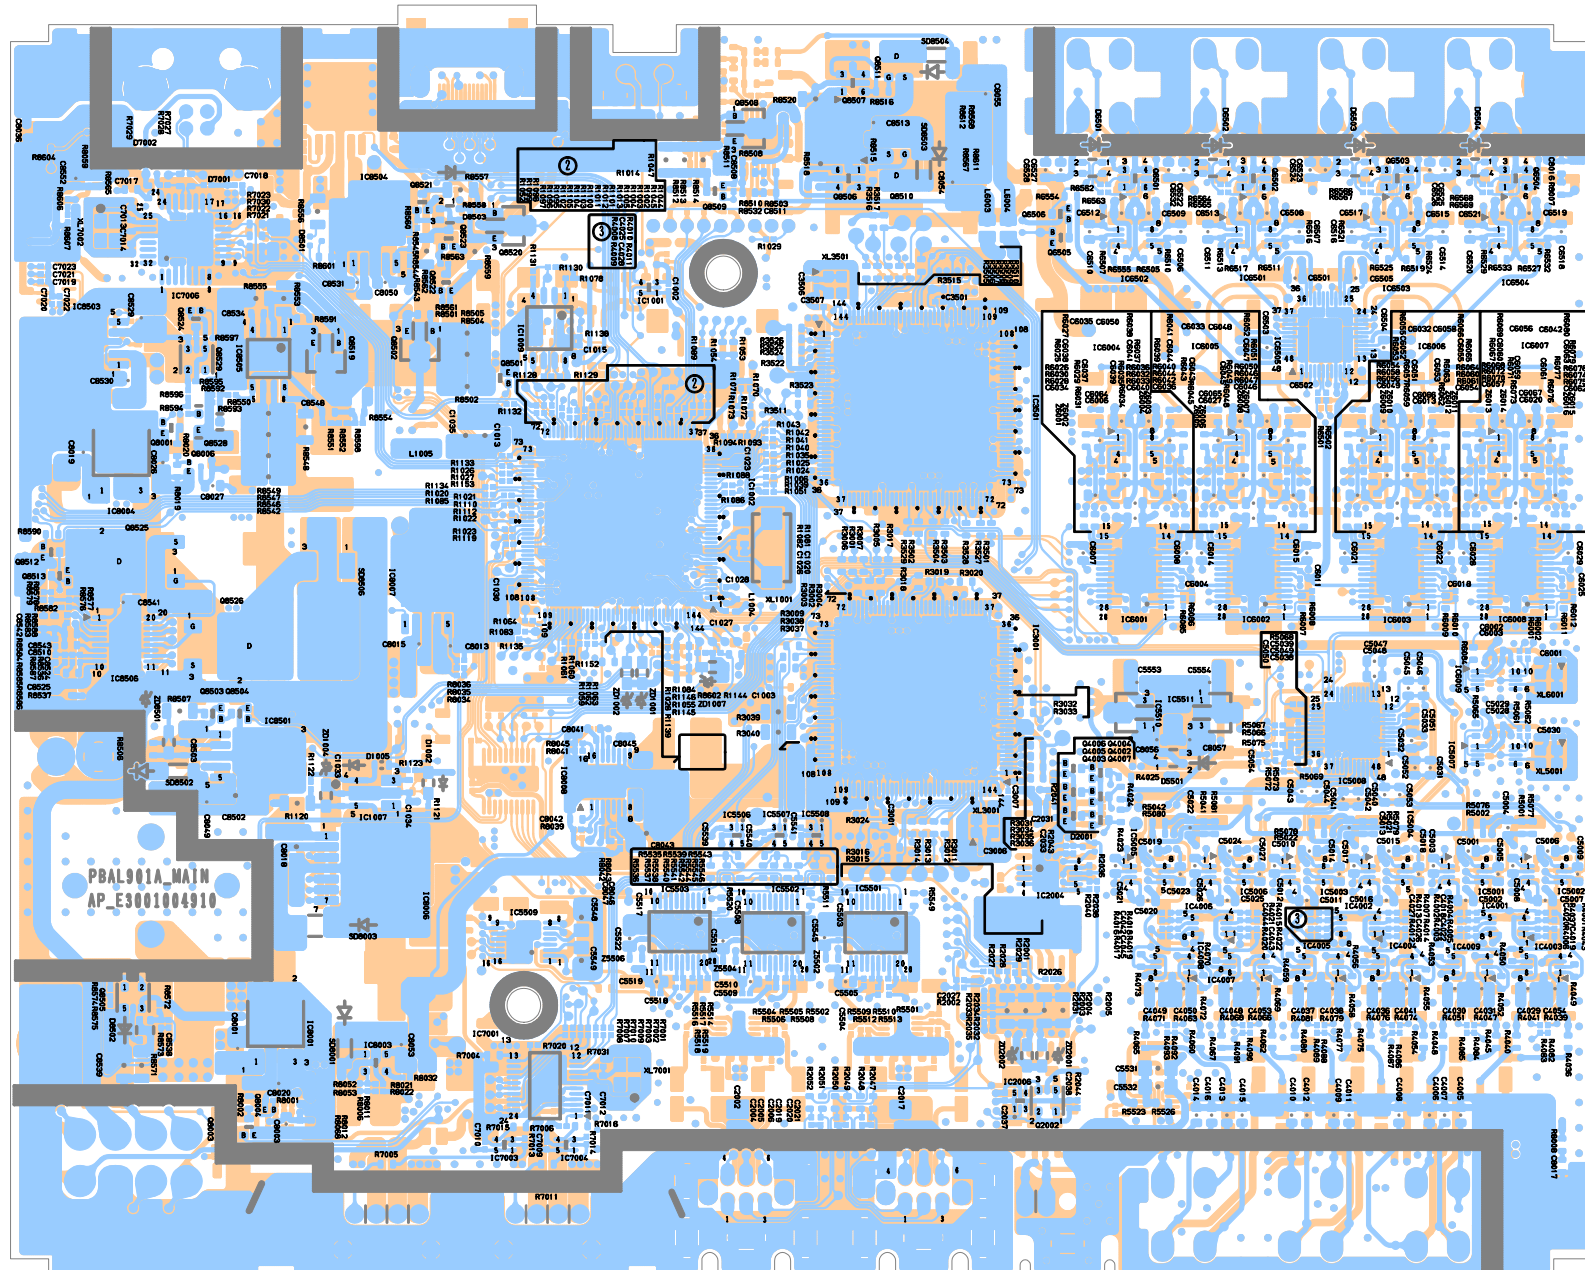


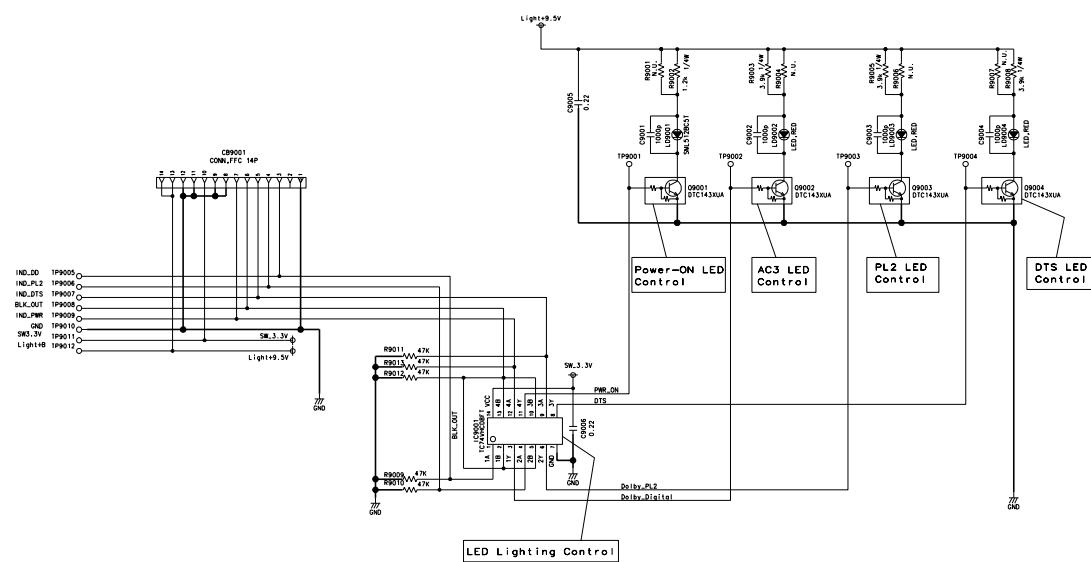

NOTE:N.U.is Not Used Parts.

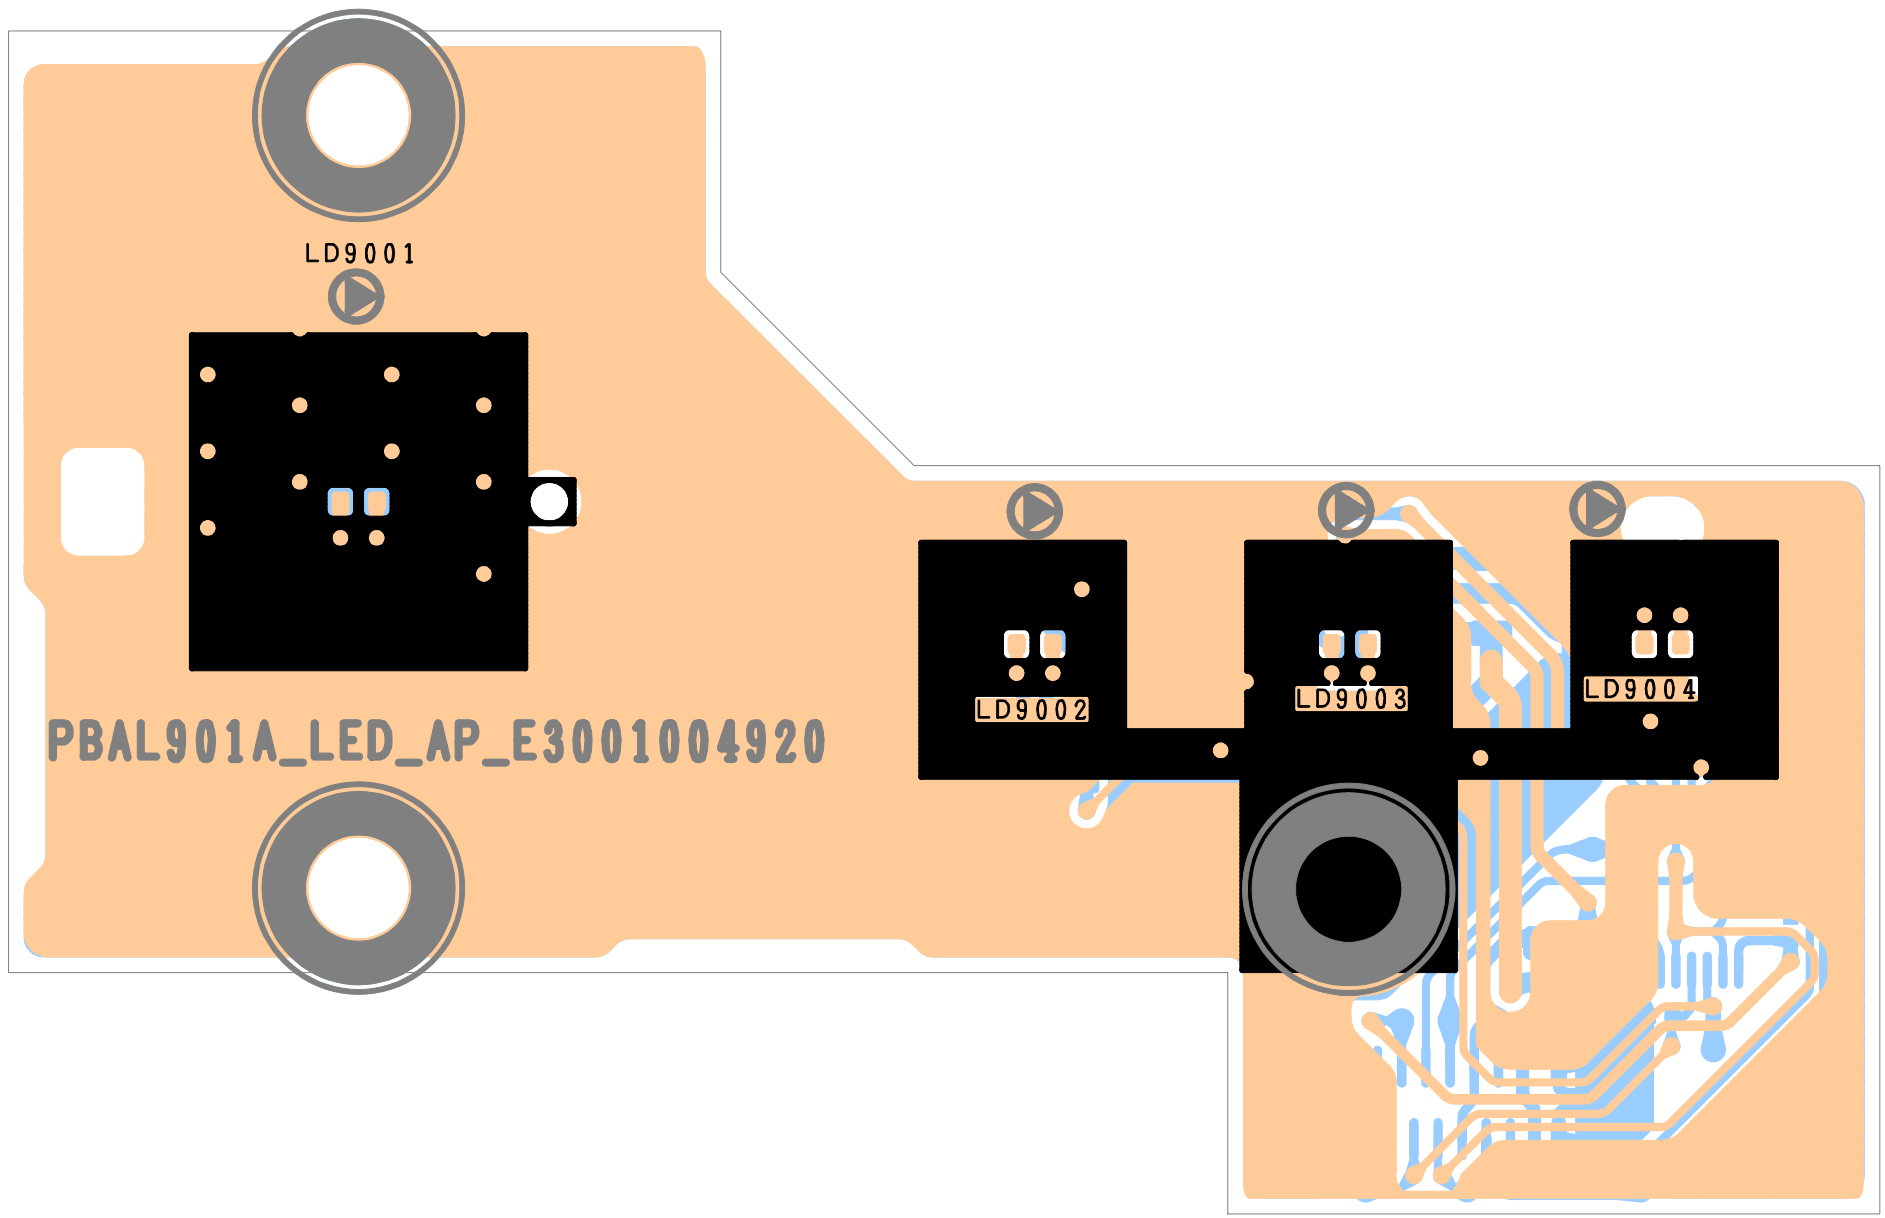

Orange Color Pattern-Component Side Patte

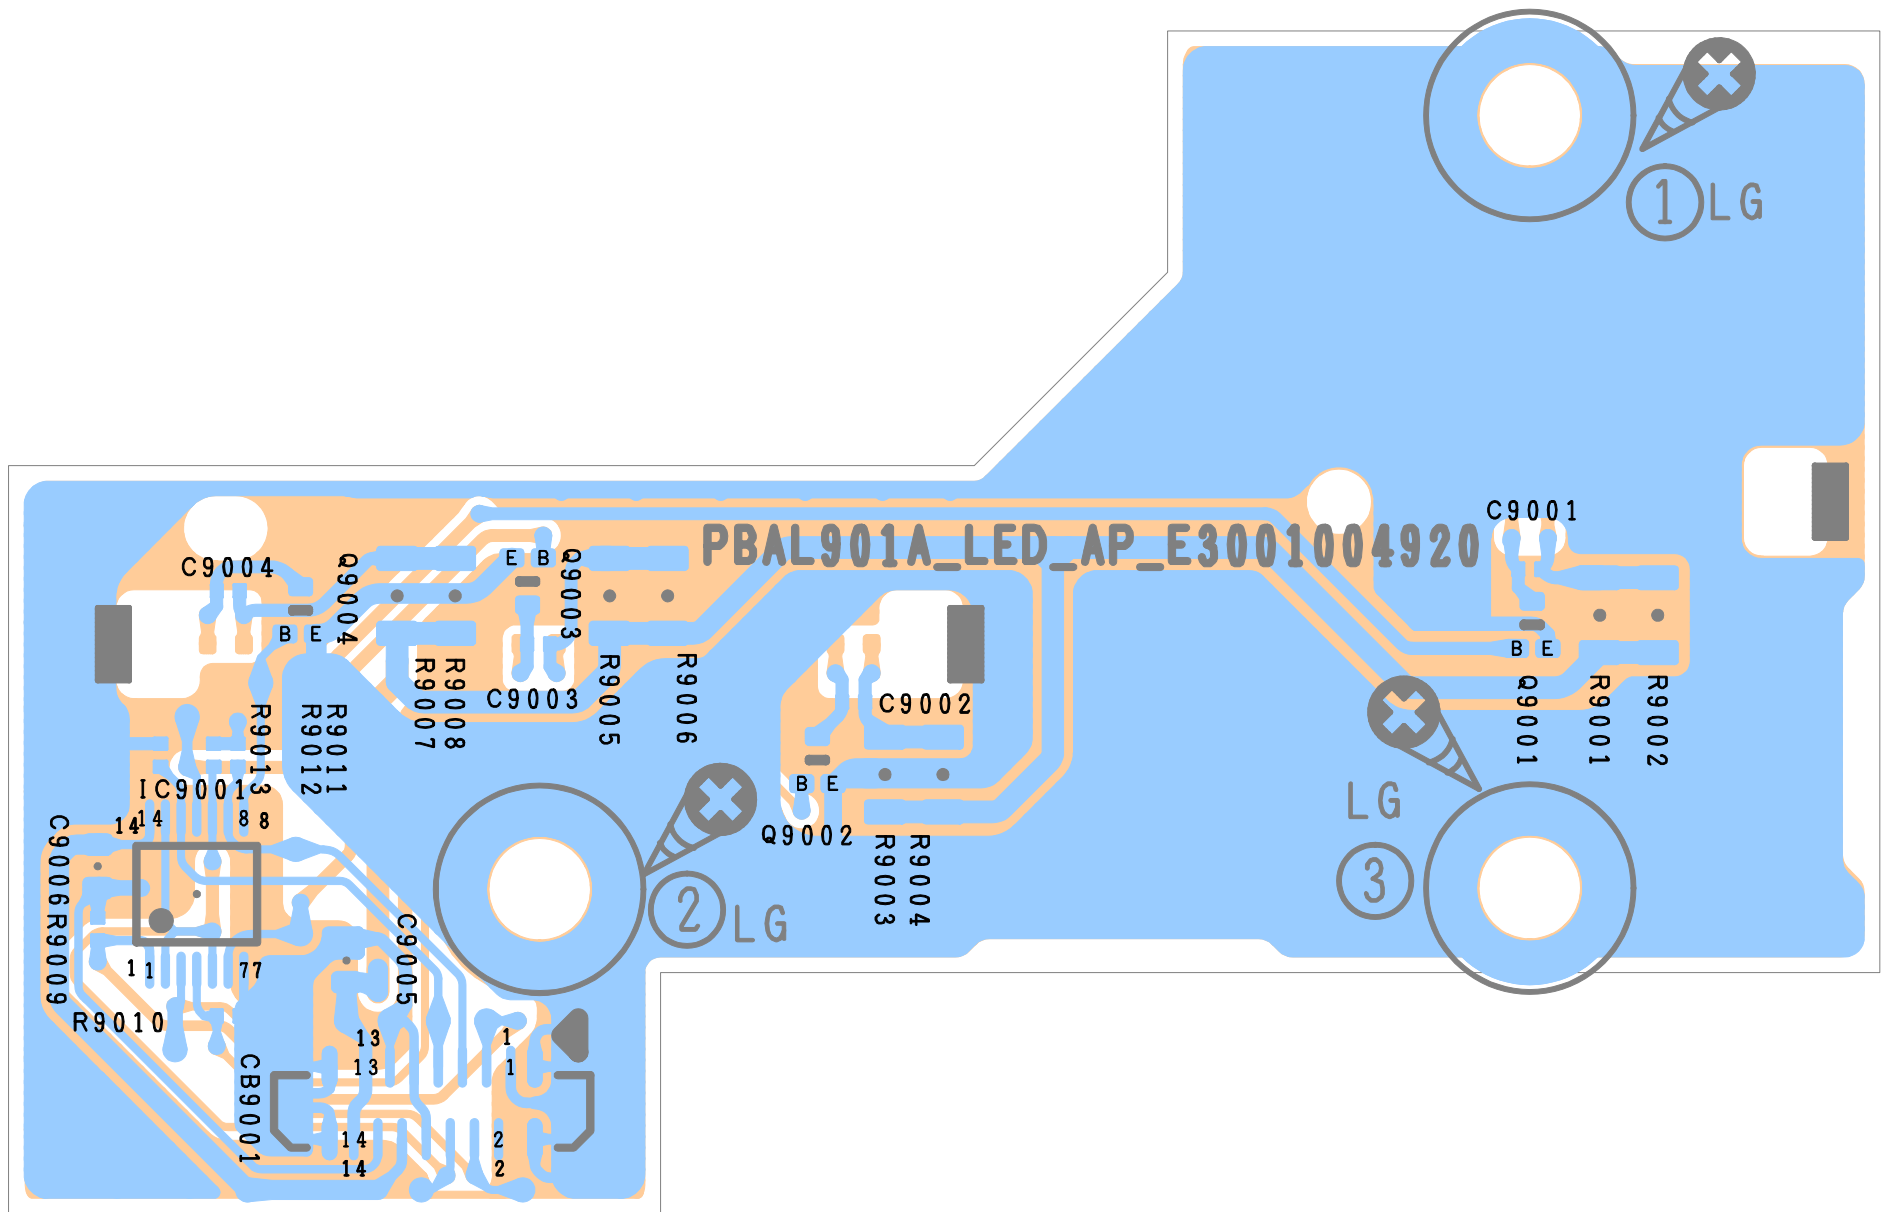

nge Color Pattern·Component Side Pattern

Terminal Voltage of IC/TR

REF[V]	1	2	3
IC5510	4.96	0.00	7.85
IC5511	0.00	-7.95	-4.95
IC8001	14.40	0.00	5.00
IC8004	14.10	0.00	3.30

REF[V]	1	2	3	4	5
IC1001	3.30	3.30	0.00	3.30	3.30
IC1004	NC	3.34	0.00	0.00	2.80
IC1005	2.80	0.00	0.00	2.79	2.80
IC1006	3.30	0.00	0.00	2.80	2.80
IC1007	NC	0.00	1.69	14.10	14.30
IC1008	3.29	3.30	0.00	NC	0.00
IC1010	3.30	3.30	0.00	3.30	3.30
IC1011	NC	0.00	1.39	3.30	0.00
IC1013	0.00	4.03	0.00	NC	0.00
IC2006	3.30	3.30	0.00	3.30	3.30
IC5506	3.30	1.68	0.00	1.67	3.30
IC5507	3.30	1.69	0.00	1.62	3.30
IC5508	3.30	1.64	0.00	1.62	3.30
IC7003	3.30	0.36	0.00	0.00	3.30
IC7004	3.30	0.36	0.00	0.00	3.30
IC8002	3.30	14.40	0.00	3.30	0.83
IC8003	3.30	0.00	0.63	5.00	5.00
IC8007	3.30	10.00	0.00	5.00	0.75
IC8501	14.40	5.63	0.00	0.00	14.40
IC8503	3.30	14.40	0.00	10.00	0.75
IC8504	9.02	14.09	0.00	3.30	0.75
IC8507	3.30	14.40	0.00	9.15	0.75

REF[V]	1	2	3	4	5	6
IC7002	0.36	0.00	5.00	0.00	0.00	0.00
IC7005	0.36	0.00	5.00	0.00	0.00	0.00

REF[V]	1	2	3	4	5	6	7
IC8006	10.00	5.15	1.70	0.00	1.02	1.06	3.30

REF[V]	1	2	3	4	5	6	7	8
IC1003	0.00	0.00	0.00	0.00	3.30	3.30	0.00	3.30
IC1009	3.30	3.30	3.30	0.00	0.00	3.30	3.30	3.30
IC2001	0.00	0.00	0.00	-5.00	0.00	0.00	0.00	5.00
IC2002	0.00	0.00	0.00	-5.00	0.00	0.00	0.00	5.00
IC2004	NC	0.00	0.00	0.00	2.01	1.55	4.58	5.00
IC4001	0.00	0.00	0.00	-8.00	0.00	0.00	0.00	8.00
IC4002	0.00	0.00	0.00	-8.00	0.00	0.00	0.00	8.00
IC4003	0.00	0.00	0.00	-8.00	0.00	0.00	0.00	8.00
IC4004	0.00	0.00	0.00	-8.00	0.00	0.00	0.00	8.00
IC4005	0.00	0.00	0.00	-8.00	0.00	0.00	0.00	8.00
IC4006	0.00	0.00	0.00	-8.00	0.00	0.00	0.00	8.00
IC4007	0.00	0.00	0.00	-8.00	0.00	0.00	0.00	8.00
IC4008	0.00	0.00	0.00	-8.00	0.00	0.00	0.00	8.00
IC4009	0.00	0.00	0.00	-8.00	0.00	0.00	0.00	8.00
IC5001	0.00	0.00	0.00	-8.00	0.00	0.00	0.00	8.00
IC5002	0.00	0.00	0.00	-8.00	0.00	0.00	0.00	8.00
IC5003	0.00	0.00	0.00	-8.00	0.00	0.00	0.00	8.00
IC5004	0.00	0.00	0.00	-8.00	0.00	0.00	0.00	8.00
IC5005	0.00	0.00	0.00	-8.00	0.00	0.00	0.00	8.00
IC5006	0.00	0.00	0.00	-8.00	0.00	0.00	0.00	8.00
IC5504	0.00	0.00	0.00	-5.00	0.00	0.00	0.00	5.00
IC5505	0.00	0.00	0.00	-5.00	0.00	0.00	0.00	5.00
IC6004	0.00	0.00	0.00	-8.00	0.00	0.00	0.00	8.00
IC6005	0.00	0.00	0.00	-8.00	0.00	0.00	0.00	8.00
IC6006	0.00	0.00	0.00	-8.00	0.00	0.00	0.00	8.00
IC6007	0.00	0.00	0.00	-8.00	0.00	0.00	0.00	8.00
IC6501	0.00	0.00	0.00	-8.00	0.00	0.00	0.00	8.00
IC6502	0.00	0.00	0.00	-8.00	0.00	0.00	0.00	8.00

1	1.69	5	1.70	9	5.00	13	2.50	17	2.50	21	NC	25	0.10
2	1.27	6	NC	10	0.00	14	0.00	18	2.50	22	0.00	26	0.00
3	1.70	7	0.00	11	2.50	15	5.00	19	0.00	23	0.00	27	0.00
4	0.00	8	3.30	12	2.50	16	2.50	20	5.00	24	3.30	28	3.30

IC6002[V]													
1	1.69	5	1.70	9	5.00	13	2.50	17	2.50	21	NC	25	0.10
2	1.27	6	NC	10	0.00	14	0.00	18	2.50	22	0.00	26	0.10
3	1.70	7	0.00	11	2.50	15	5.00	19	0.00	23	0.00	27	0.00
4	0.00	8	3.30	12	2.50	16	2.50	20	5.00	24	3.30	28	3.30

IC6003[V]													
1	1.69	5	1.70	9	5.00	13	2.50	17	2.50	21	NC	25	0.10
2	1.27	6	NC	10	0.00	14	0.00	18	2.50	22	0.00	26	0.10
3	1.70	7	0.00	11	2.50	15	5.00	19	0.00	23	0.00	27	0.00
4	0.00	8	3.30	12	2.50	16	2.50	20	5.00	24	3.30	28	3.30

IC6008[V]													
1	1.69	5	1.70	9	5.00	13	2.50	17	2.50	21	NC	25	NC
2	1.27	6	NC	10	0.00	14	0.00	18	2.50	22	0.00	26	0.10
3	1.70	7	0.00	11	2.50	15	5.00	19	0.00	23	0.00	27	0.00
4	0.00	8	3.30	12	2.50	16	2.50	20	5.00	24	3.30	28	3.30

IC7006[V]													
1	NC	6	0.00	11	0.00	16	NC	21	0.00	26	1.60	31	3.30
2	NC	7	NC	12	3.30	17	0.00	22	3.30	27	1.66	32	3.30
3	3.30	8	NC	13	0.00	18	0.00	23	3.30	28	0.00		
4	3.30	9	NC	14	0.00	19	0.00	24	0.00	29	3.30		
5	0.00	10	3.30	15	NC	20	0.00	25	0.00	30	3.30		

IC5008[V]											
1	2.50	9	5.00	17	0.00	25	1.68	33	3.30	41	3.30
2	2.50	10	0.00	18	0.00	26	NC	34	0.00	42	0.00
3	0.00	11	2.50	19	0.00	27	1.60	35	3.30	43	2.50
4	5.00	12	2.50	20	5.00	28	3.30	36	3.30	44	2.50
5	0.00	13	2.50	21	0.00	29	0.00	37	0.00	45	2.50
6	5.00	14	2.50	22	0.00	30	1.60	38	0.00	46	2.50
7	2.50	15	0.00	23	1.70	31	1.60	39	3.30	47	2.50
8	0.00	16	0.00	24	1.70	32	0.00	40	3.30	48	2.50

IC6505[V]											
1	0.00	9	3.30	17	0.00	25	8.00	33	0.00	41	0.00
2	0.00	10	3.30	18	0.00	26	-8.00	34	0.00	42	0.00
3	3.30	11	0.00	19	0.00	27	0.00	35	8.00	43	0.00
4	0.00	12	0.00	20	0.00	28	0.00	36	-8.00	44	0.00
5	3.30	13	0.00	21	0.00	29	0.00	37	0.00	45	8.00
6	3.30	14	0.00	22	0.00	30	0.00	38	0.00	46	-8.00
7	0.00	15	8.00	23	0.00	31	0.00	39	0.00	47	0.00
8	NC	16	-8.00	24	0.00	32	0.00	40	0.00	48	0.00

IC1002[V]											
1	3.30	25	0.00	49	0.00	73	0.00	97	NC	121	0.00
2	0.00	26	0.00	50	0.00	74	0.00	98	3.30	122	NC
3	NC	27	NC	51	3.30	75	3.30	99	NC	123	NC
4	NC	28	0.00	52	0.00	76	0.00	100	NC	124	NC
5	3.30	29	3.30	53	0.00	77	3.30	101	NC	125	0.00
6	0.00	30	0.00	54	0.00	78	0.00	102	0.00	126	NC
7	NC	31	0.00	55	NC	79	3.30	103	0.00	127	NC
8	0.00	32	3.30	56	3.30	80	3.30	104	3.30	128	NC
9	3.30	33	0.00	57	3.30	81	0.00	105	0.00	129	1.43
10	2.54	34	3.30	58	0.00	82	0.00	106	0.00	130	2.26
11	0.00	35	3.30	59	3.23	83	0.00	107	0.00	131	1.29
12	1.17	36	3.30	60	3.30	84	0.00	108	0.00	132	NC
13	0.69	37	3.30	61	3.30	85	3.30	109	0.00	133	NC
14	3.30	38	3.30	62	3.30	86	3.30	110	0.00	134	1.69
15	0.00	39	0.00	63	3.30	87	3.30	111	0.00	135	NC
16	NC	40	0.00	64	3.30	88	3.30	112	NC	136	1.44
17	3.30	41	0.00	65	3.30	89	3.30	113	NC	137	NC

18	0.00	42	0.00	66	3.30	90	3.30	114	NC	138	NC
19	3.30	43	NC	67	3.30	91	3.30	115	NC	139	NC
20	0.00	44	4.70	68	3.30	92	3.30	116	NC	140	0.00
21	5.00	45	3.30	69	0.00	93	3.30	117	3.30	141	1.23
22	3.30	46	3.30	70	3.30	94	0.00	118	3.30	142	0.00
23	3.30	47	1.60	71	0.00	95	0.00	119	3.30	143	NC
24	0.00	48	3.30	72	0.00	96	0.00	120	0.00	144	NC

IC3001[V]													
1	1.20	25	NC	49	NC	73	3.30	97	0.00	121	3.30	145	0.00
2	0.00	26	NC	50	NC	74	0.00	98	0.00	122	3.30		
3	0.00	27	1.20	51	NC	75	1.20	99	1.20	123	0.00		
4	0.00	28	0.00	52	NC	76	0.00	100	0.00	124	1.20		
5	0.00	29	NC	53	1.71	77	1.50	101	1.20	125	3.30		
6	0.00	30	NC	54	1.20	78	1.20	102	0.00	126	3.30		
7	3.30	31	3.30	55	0.00	79	1.64	103	1.20	127	0.00		
8	0.00	32	0.00	56	0.00	80	1.68	104	0.00	128	0.00		
9	1.20	33	NC	57	0.38	81	1.69	105	1.20	129	1.20		
10	0.00	34	NC	58	0.00	82	0.00	106	0.00	130	3.30		
11	1.20	35	NC	59	3.30	83	1.20	107	1.20	131	1.20		
12	0.00	36	1.20	60	1.20	84	0.00	108	1.20	132	0.00		
13	1.20	37	1.20	61	0.00	85	0.00	109	0.00	133	0.00		
14	0.00	38	0.00	62	0.33	86	1.71	110	1.20	134	NC		
15	0.00	39	NC	63	1.63	87	1.31	111	0.00	135	3.30		
16	0.00	40	NC	64	1.68	88	0.90	112	1.20	136	0.97		
17	NC	41	NC	65	1.69	89	1.70	113	0.00	137	3.30		
18	0.00	42	NC	66	1.20	90	1.20	114	1.20	138	0.57		
19	1.20	43	NC	67	0.00	91	0.00	115	0.00	139	0.00		
20	0.00	44	0.00	68	1.20	92	0.00	116	3.30	140	3.30		
21	3.30	45	3.30	69	0.00	93	3.30	117	0.00	141	0.00		
22	0.00	46	NC	70	1.50	94	1.70	118	1.20	142	1.83		
23	1.20	47	1.20	71	1.50	95	0.00	119	0.00	143	NC		
24	NC	48	0.00	72	1.20	96	1.20	120	1.20	144	3.30		

IC3501[V]													
1	1.20	25	NC	49	NC	73	3.30	97	NC	121	3.30	145	0.00
2	0.00	26	NC	50	NC	74	0.00	98	NC	122	3.30		
3	0.00	27	1.20	51	NC	75	1.20	99	1.20	123	0.00		
4	0.00	28	0.00	52	NC	76	0.00	100	0.00	124	1.20		
5	0.00	29	NC	53	1.27	77	NC	101	1.20	125	3.30		
6	0.00	30	NC	54	1.20	78	NC	102	0.00	126	3.30		
7	3.30	31	3.30	55	0.00	79	NC	103	1.20	127	0.00		
8	0.00	32	0.00	56	1.50	80	NC	104	0.00	128	0.00		
9	1.20	33	NC	57	1.70	81	1.70	105	1.20	129	1.20		
10	0.00	34	NC	58	0.00	82	1.69	106	0.00	130	3.30		
11	1.20	35	NC	59	3.30	83	1.20	107	1.20	131	1.20		
12	0.00	36	1.20	60	1.20	84	0.00	108	1.20	132	0.00		
13	1.20	37	1.20	61	0.00	85	0.00	109	0.00	133	0.00		
14	0.00	38	0.00	62	1.69	86	0.00	110	1.20	134	1.76		
15	0.00	39	NC	63	1.50	87	1.68	111	0.00	135	3.30		
16	0.00	40	NC	64	1.50	88	0.40	112	1.20	136	0.10		
17	NC	41	NC	65	1.69	89	0.72	113	0.00	137	3.30		
18	0.00	42	NC	66	1.20	90	1.20	114	1.20	138	0.57		
19	1.20	43	NC	67	0.00	91	0.00	115	3.30	139	0.00		
20	0.00	44	0.00	68	1.20	92	0.00	116	3.30	140	3.30		
21	3.30	45	3.30	69	0.00	93	3.30	117	0.00	141	0.00		
22	0.00	46	NC	70	1.69	94	1.72	118	1.20	142	1.82		
23	1.20	47	1.20	71	0.83	95	0.00	119	0.00	143	1.60		
24	NC	48	0.00	72	1.20	96	1.20	120	1.20	144	3.30		

REF[V]	B	C	E
Q1002	3.30	0.03	0.00
Q1003	0.03	3.27	3.30
Q1004	3.30	0.03	0.00
Q2001	3.30	0.00	0.00
Q4002	0.03	7.85	7.89
Q4003	3.30	0.03	0.00
Q4004	0.03	7.85	7.89

REF[V]	B	C	E
Q8502	13.70	14.40	14.40
Q8503	0.03	14.30	14.40
Q8504	3.30	0.03	0.00
Q8508	9.33	10.00	10.00
Q8509	3.30	0.03	0.00
Q8512	3.30	0.03	0.00
Q8513	0.00	14.37	14.40

Q4005	3.30	0.03	0.00
Q4006	3.30	0.03	0.00
Q4007	0.03	7.85	7.89
Q6505	2.82	0.03	0.00
Q6506	0.03	14.33	14.40
Q7003	3.30	0.03	0.00
Q7004	0.03	3.27	3.30
Q8001	3.30	0.03	0.00
Q8003	3.30	0.03	0.00
Q8004	4.28	5.00	5.00
Q8006	2.63	3.27	3.30
Q8501	3.30	0.12	0.00

Q8519	0.27	9.77	0.00
Q8520	9.33	10.00	10.00
Q8521	2.13	0.03	0.00
Q8522	0.00	15.00	15.10
Q8523	15.00	0.03	0.00
Q8524	0.00	6.90	0.00
Q8528	0.60	0.00	0.00
Q9001	3.30	0.03	0.00
Q9002	0.00	7.83	0.00
Q9003	0.00	7.83	0.00
Q9004	0.00	7.83	0.00

REF[V]	1	2	3	4	5
Q1001	NC	3.30	3.30	6.90	0.00
Q2002	NC	0.00	3.30	0.00	0.00
Q8505	NC	0.00	3.30	0.50	0.00
Q8529	NC	10.07	10.11	6.90	0.00


REF[V]	1	2	3	4	5	6
Q4001	0.00	0.70	0.00	0.00	0.70	0.00
Q4008	0.00	0.70	0.00	0.00	0.70	0.00
Q4009	0.00	0.70	0.00	0.00	0.70	0.00
Q4010	0.00	0.70	0.00	0.00	0.70	0.00
Q4011	0.00	0.70	0.00	0.00	0.70	0.00
Q4012	0.00	0.70	0.00	0.00	0.70	0.00
Q6501	0.00	0.70	0.00	0.00	0.70	0.00
Q6502	0.00	0.70	0.00	0.00	0.70	0.00
Q6503	0.00	0.70	0.00	0.00	0.70	0.00
Q6504	0.00	0.70	0.00	0.00	0.70	0.00
Q8506	10.00	6.20	6.50	0.00	6.20	6.50
Q8507	10.00	7.89	7.85	0.00	7.86	7.84

REF[V]	G	D	S
Q8510	6.50	10.00	8.18
Q8511	7.87	10.00	0.25
Q8525	15.60	14.40	10.50
Q8526	0.00	10.50	0.00

[Measuring Conditions]

1. Power Supply Voltage : DC14.4V
2. Measuring Meter : Digital Multimeter
3. Measuring Point Reference : Between GND
4. Measuring Condition : No Signal
 - 1) System select : F-2way+R+SW
 - 2) Front High : Tweeter
 - 3) Rear : ON
 - 4) SUBWOOFER : ON
 - 5) SUBWOOFER2 : ON
 - 6) SW CHANNEL : Mono
 - 7) AUX Input Set up : 5.1ch Input
 - 8) AUX1 : High

Exploded View (Cabinet)

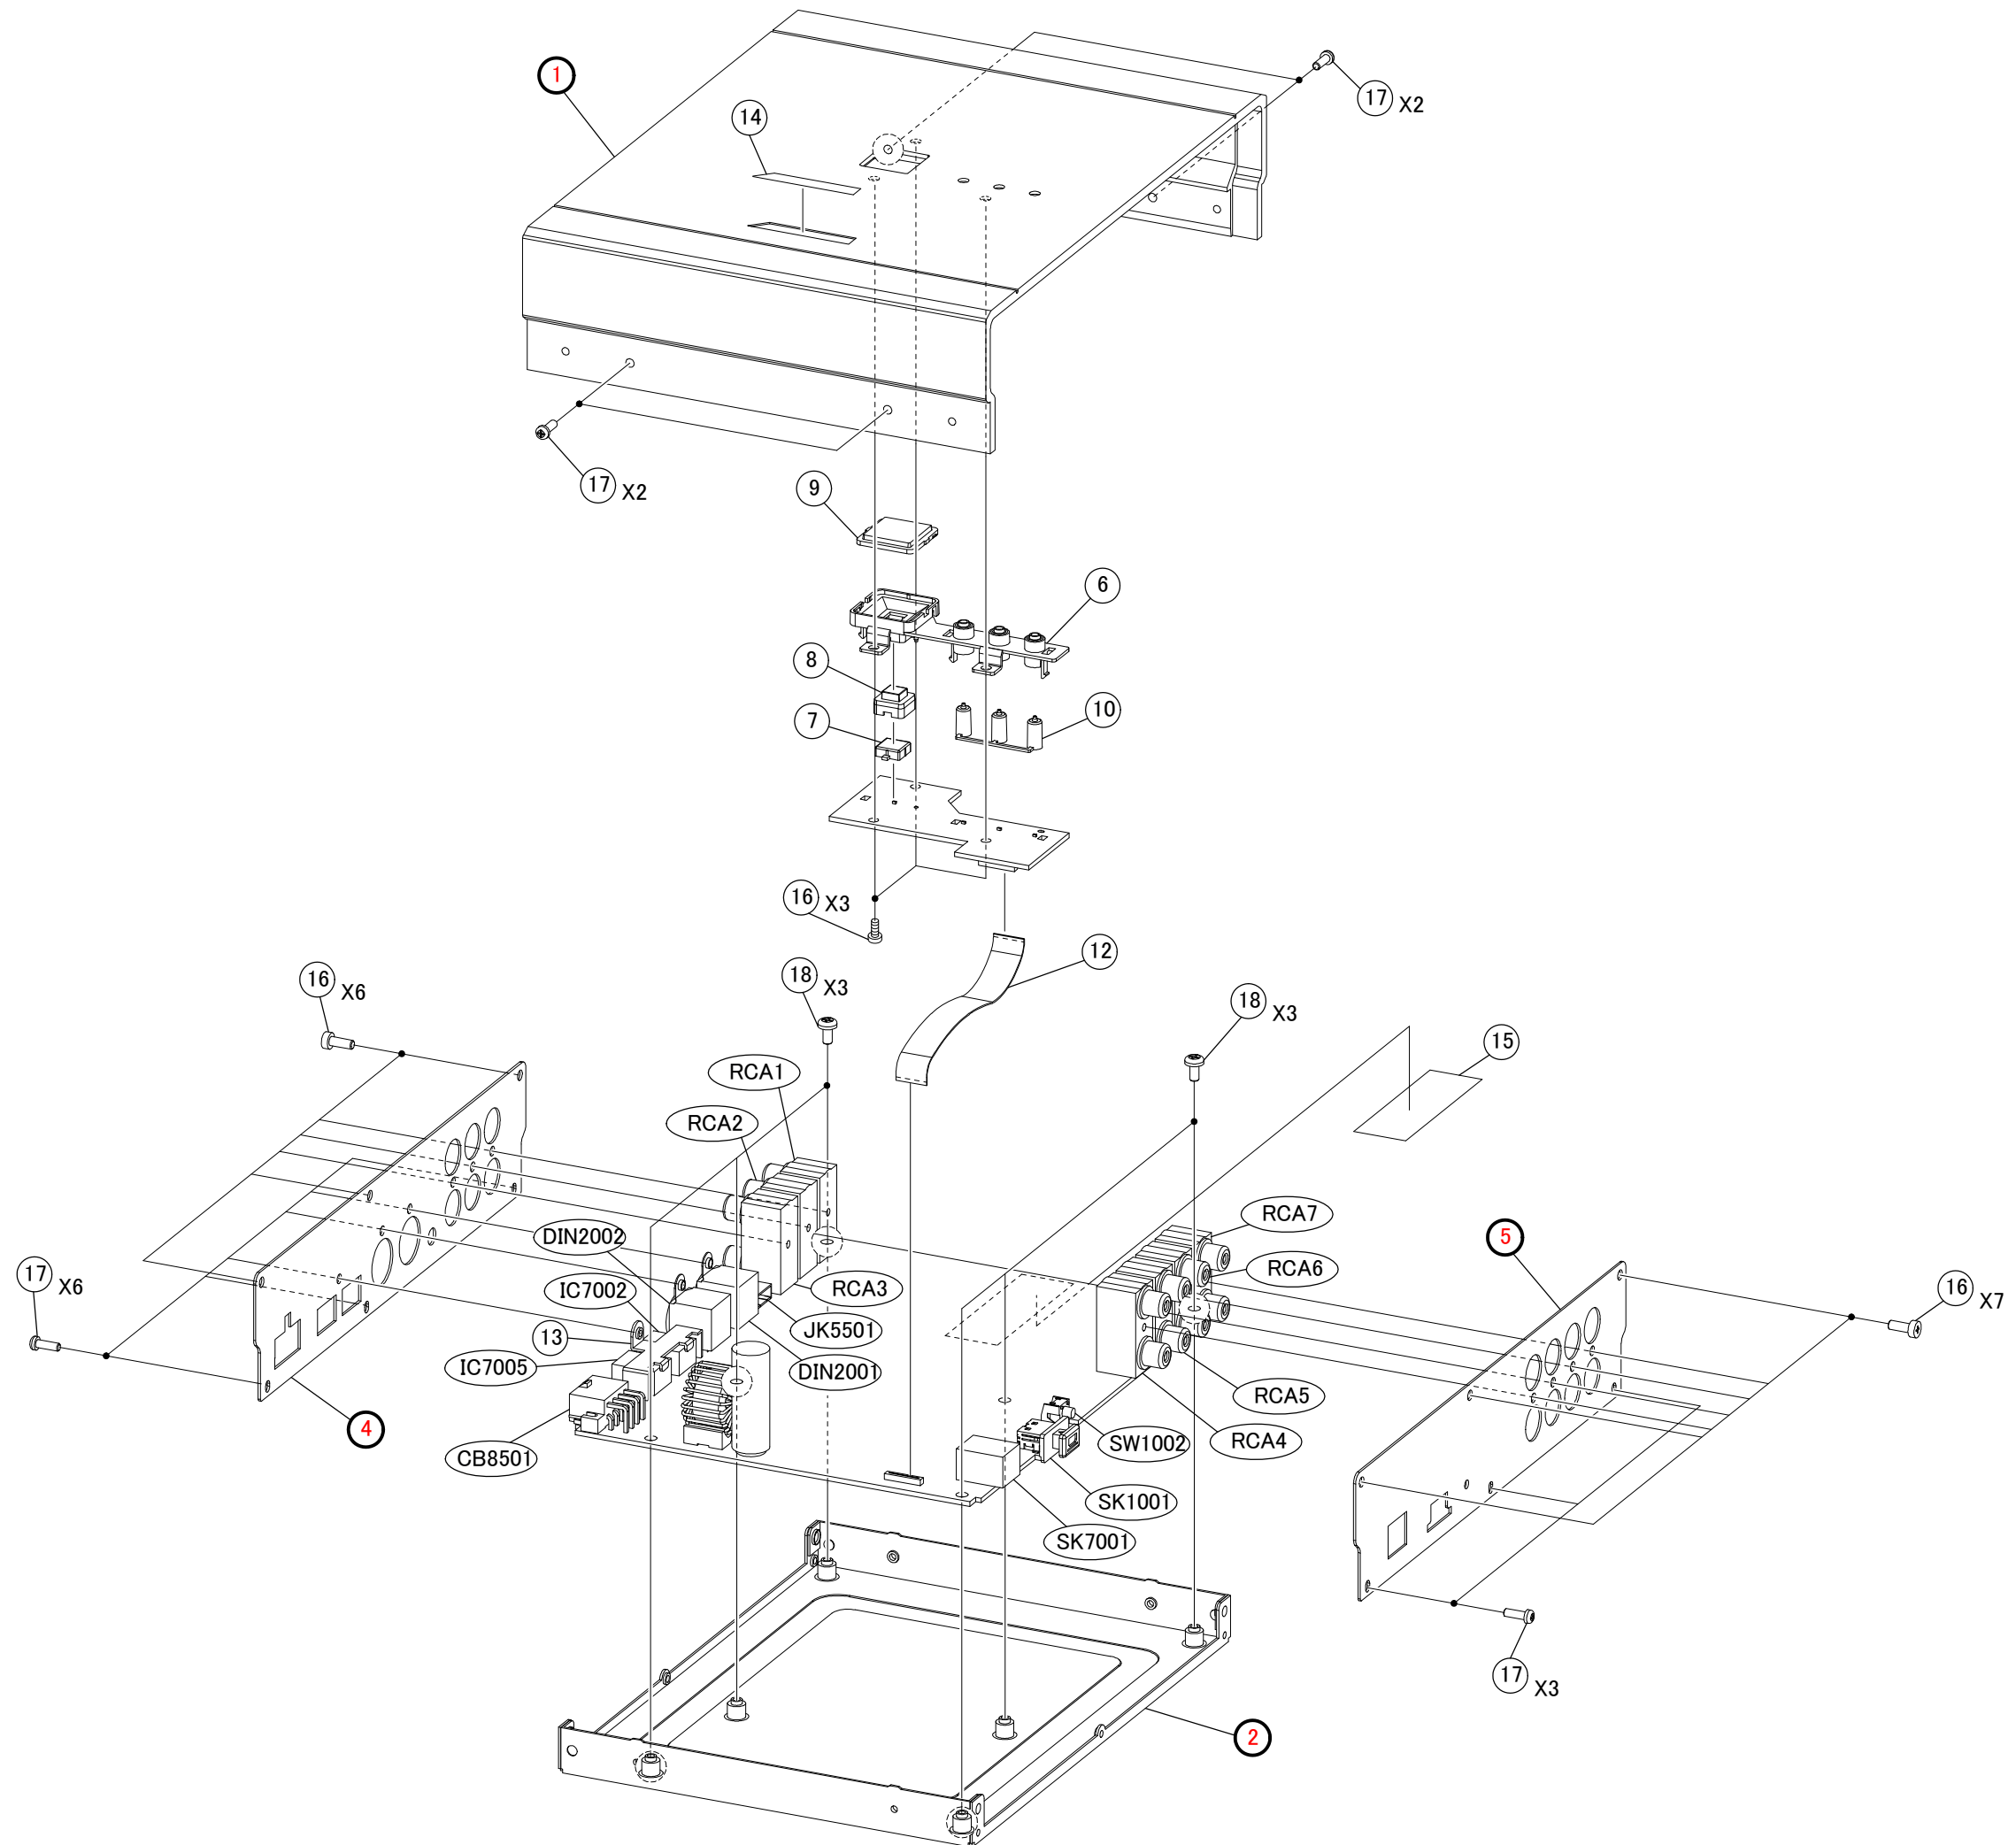

MAIN-P.W.Board			C1001	08E41024S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board			C1002	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C1003	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C1004	08E42139S01	CAP,CER.100pF/50V
MAIN-P.W.Board			C1005	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C1006	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C1007	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C1008	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C1009	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C1010	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C1011	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C1012	08E36567S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C1013	08E42328S01	CAP,CER. 22uF/10V
MAIN-P.W.Board			C1014	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C1015	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C1016	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C1017	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C1018	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C1019	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C1020	08E38483S01	CAP,CER. 8pF/50V
MAIN-P.W.Board			C1021	08E40853S01	CAP,CER. 4.7uF/10V
MAIN-P.W.Board			C1022	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C1023	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C1024	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C1025	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C1026	08E38483S01	CAP,CER. 8pF/50V
MAIN-P.W.Board			C1027	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C1028	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C1029	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C1030	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C1031	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C1032	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C1033	08E36567S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C1034	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C1035	08E42328S01	CAP,CER. 22uF/10V
MAIN-P.W.Board			C1036	08E38604S01	CAP,CER. 1uF/50V
MAIN-P.W.Board			C1037	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C1038	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C1039	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C1040	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C1041	08E42324S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C1042	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C2001	08E42321S01	CAP,CER. 68pF/50V
MAIN-P.W.Board			C2002	08E42321S01	CAP,CER. 68pF/50V
MAIN-P.W.Board			C2003	08E42321S01	CAP,CER. 68pF/50V
MAIN-P.W.Board			C2004	08E42321S01	CAP,CER. 68pF/50V
MAIN-P.W.Board			C2005	08E42321S01	CAP,CER. 68pF/50V
MAIN-P.W.Board			C2006	08E42321S01	CAP,CER. 68pF/50V
MAIN-P.W.Board			C2007	08E41024S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board			C2008	08E41035S01	CAP,CER. 0.01uF/630V
MAIN-P.W.Board			C2009	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C2010	08E42323S01	CAP,CER. 22pF/50V
MAIN-P.W.Board			C2011	08E42323S01	CAP,CER. 22pF/50V
MAIN-P.W.Board			C2012	08E42323S01	CAP,CER. 22pF/50V

MAIN-P.W.Board		C2013	08E42323S01	CAP,CER. 22pF/50V
MAIN-P.W.Board		C2014	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C2015	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C2016	08E42321S01	CAP,CER. 68pF/50V
MAIN-P.W.Board		C2017	08E42321S01	CAP,CER. 68pF/50V
MAIN-P.W.Board		C2018	08E42321S01	CAP,CER. 68pF/50V
MAIN-P.W.Board		C2019	08E42321S01	CAP,CER. 68pF/50V
MAIN-P.W.Board		C2020	08E42321S01	CAP,CER. 68pF/50V
MAIN-P.W.Board		C2021	08E42321S01	CAP,CER. 68pF/50V
MAIN-P.W.Board		C2022	08E41024S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board		C2023	08E42323S01	CAP,CER. 22pF/50V
MAIN-P.W.Board		C2024	08E42323S01	CAP,CER. 22pF/50V
MAIN-P.W.Board		C2025	08E42323S01	CAP,CER. 22pF/50V
MAIN-P.W.Board		C2026	08E42323S01	CAP,CER. 22pF/50V
MAIN-P.W.Board		C2027	08E42324S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board		C2028	08E28760S01	CAP,CER. 10pF/50V
MAIN-P.W.Board		C2029	08E28760S01	CAP,CER. 10pF/50V
MAIN-P.W.Board		C2030	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board		C2031	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board		C2032	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board		C2033	08E42139S01	CAP,CER.100pF/50V
MAIN-P.W.Board		C2034	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C2035	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C2036	08E41024S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board		C2037	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board		C2038	08E42324S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board		C3001	08E42139S01	CAP,CER.100pF/50V
MAIN-P.W.Board		C3002	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board		C3003	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board		C3004	08E36567S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board		C3005	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board		C3006	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board		C3008	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board		C3009	08E36567S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board		C3010	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board		C3011	08E36567S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board		C3012	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board		C3013	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board		C3014	08E36567S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board		C3015	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board		C3016	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board		C3017	08E36567S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board		C3018	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board		C3019	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board		C3020	08E36567S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board		C3021	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board		C3022	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board		C3023	08E36567S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board		C3024	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board		C3025	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board		C3026	08E36567S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board		C3027	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board		C3028	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board		C3029	08E36567S01	CAP,CER. 0.01uF/50V

MAIN-P.W.Board		C3030	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board		C3501	08E42139S01	CAP,CER.100pF/50V
MAIN-P.W.Board		C3502	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board		C3503	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board		C3504	08E36567S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board		C3505	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board		C3506	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board		C3508	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board		C3509	08E36567S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board		C3510	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board		C3511	08E36567S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board		C3512	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board		C3513	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board		C3514	08E36567S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board		C3515	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board		C3516	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board		C3517	08E36567S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board		C3518	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board		C3519	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board		C3520	08E36567S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board		C3521	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board		C3522	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board		C3523	08E36567S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board		C3524	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board		C3525	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board		C3526	08E36567S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board		C3527	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board		C3528	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board		C3529	08E36567S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board		C3530	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board		C4001	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C4002	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C4003	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C4004	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C4005	08E42422S01	METAL,100pF/50V
MAIN-P.W.Board		C4006	08E42422S01	METAL,100pF/50V
MAIN-P.W.Board		C4007	08E42422S01	METAL,100pF/50V
MAIN-P.W.Board		C4008	08E42422S01	METAL,100pF/50V
MAIN-P.W.Board		C4009	08E42422S01	METAL,100pF/50V
MAIN-P.W.Board		C4010	08E42422S01	METAL,100pF/50V
MAIN-P.W.Board		C4011	08E42422S01	METAL,100pF/50V
MAIN-P.W.Board		C4012	08E42422S01	METAL,100pF/50V
MAIN-P.W.Board		C4013	08E42422S01	METAL,100pF/50V
MAIN-P.W.Board		C4014	08E42422S01	METAL,100pF/50V
MAIN-P.W.Board		C4015	08E42422S01	METAL,100pF/50V
MAIN-P.W.Board		C4016	08E42422S01	METAL,100pF/50V
MAIN-P.W.Board		C4017	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C4018	08E42418S01	CAP,CER. 10pF/50V
MAIN-P.W.Board		C4019	08E42418S01	CAP,CER. 10pF/50V
MAIN-P.W.Board		C4020	08E42418S01	CAP,CER. 10pF/50V
MAIN-P.W.Board		C4021	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C4022	08E42418S01	CAP,CER. 10pF/50V
MAIN-P.W.Board		C4023	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C4024	23E41346S01	CAP,CER. 0.22uF/50V

MAIN-P.W.Board		C4025	08E42418S01	CAP,CER. 10pF/50V
MAIN-P.W.Board		C4026	08E42418S01	CAP,CER. 10pF/50V
MAIN-P.W.Board		C4027	08E42418S01	CAP,CER. 10pF/50V
MAIN-P.W.Board		C4028	08E42418S01	CAP,CER. 10pF/50V
MAIN-P.W.Board		C4029	08E42422S01	METAL,100pF/50V
MAIN-P.W.Board		C4030	08E42422S01	METAL,100pF/50V
MAIN-P.W.Board		C4031	08E42422S01	METAL,100pF/50V
MAIN-P.W.Board		C4032	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C4033	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C4034	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C4035	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C4036	08E42422S01	METAL,100pF/50V
MAIN-P.W.Board		C4037	08E42422S01	METAL,100pF/50V
MAIN-P.W.Board		C4038	08E42422S01	METAL,100pF/50V
MAIN-P.W.Board		C4039	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C4040	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C4041	08E42422S01	METAL,100pF/50V
MAIN-P.W.Board		C4042	08E42418S01	CAP,CER. 10pF/50V
MAIN-P.W.Board		C4043	08E42418S01	CAP,CER. 10pF/50V
MAIN-P.W.Board		C4044	08E42418S01	CAP,CER. 10pF/50V
MAIN-P.W.Board		C4045	08E42418S01	CAP,CER. 10pF/50V
MAIN-P.W.Board		C4046	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C4047	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C4048	08E42422S01	METAL,100pF/50V
MAIN-P.W.Board		C4049	08E42422S01	METAL,100pF/50V
MAIN-P.W.Board		C4050	08E42422S01	METAL,100pF/50V
MAIN-P.W.Board		C4051	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C4052	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C4053	08E42422S01	METAL,100pF/50V
MAIN-P.W.Board		C4054	08E42422S01	METAL,100pF/50V
MAIN-P.W.Board		C5001	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C5002	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C5003	08E42424S01	METAL,470pF/50V
MAIN-P.W.Board		C5004	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C5005	08E42424S01	METAL,470pF/50V
MAIN-P.W.Board		C5006	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C5007	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C5008	08E42424S01	METAL,470pF/50V
MAIN-P.W.Board		C5009	08E42424S01	METAL,470pF/50V
MAIN-P.W.Board		C5010	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C5011	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C5012	08E42424S01	METAL,470pF/50V
MAIN-P.W.Board		C5013	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C5014	08E42424S01	METAL,470pF/50V
MAIN-P.W.Board		C5015	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C5016	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C5017	08E42424S01	METAL,470pF/50V
MAIN-P.W.Board		C5018	08E42424S01	METAL,470pF/50V
MAIN-P.W.Board		C5019	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C5020	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C5021	08E42424S01	METAL,470pF/50V
MAIN-P.W.Board		C5022	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C5023	08E42424S01	METAL,470pF/50V
MAIN-P.W.Board		C5024	23E41346S01	CAP,CER. 0.22uF/50V

MAIN-P.W.Board		C5025	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C5026	08E42424S01	METAL,470pF/50V
MAIN-P.W.Board		C5027	08E42424S01	METAL,470pF/50V
MAIN-P.W.Board		C5028	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board		C5029	08E41036S01	CAP,CER. 1uF/16V
MAIN-P.W.Board		C5030	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board		C5031	08E42423S01	METAL,1500pF/50V
MAIN-P.W.Board		C5032	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C5033	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board		C5034	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C5035	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C5036	08E42325S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board		C5037	08E42325S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board		C5038	08E42325S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board		C5039	08E42325S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board		C5040	08E42423S01	METAL,1500pF/50V
MAIN-P.W.Board		C5041	08E42423S01	METAL,1500pF/50V
MAIN-P.W.Board		C5042	08E42423S01	METAL,1500pF/50V
MAIN-P.W.Board		C5043	08E42423S01	METAL,1500pF/50V
MAIN-P.W.Board		C5044	08E42423S01	METAL,1500pF/50V
MAIN-P.W.Board		C5045	08E42423S01	METAL,1500pF/50V
MAIN-P.W.Board		C5046	08E42423S01	METAL,1500pF/50V
MAIN-P.W.Board		C5047	08E42423S01	METAL,1500pF/50V
MAIN-P.W.Board		C5048	08E42423S01	METAL,1500pF/50V
MAIN-P.W.Board		C5049	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board		C5050	08E42325S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board		C5051	08E41036S01	CAP,CER. 1uF/16V
MAIN-P.W.Board		C5052	08E42423S01	METAL,1500pF/50V
MAIN-P.W.Board		C5053	08E42423S01	METAL,1500pF/50V
MAIN-P.W.Board		C5054	08E42324S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board		C5501	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board		C5502	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board		C5503	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board		C5504	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board		C5505	08E42327S01	CAP,CER. 10uF/10V
MAIN-P.W.Board		C5506	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board		C5507	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board		C5508	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board		C5509	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board		C5510	08E42327S01	CAP,CER. 10uF/10V
MAIN-P.W.Board		C5511	08E42327S01	CAP,CER. 10uF/10V
MAIN-P.W.Board		C5513	08E42327S01	CAP,CER. 10uF/10V
MAIN-P.W.Board		C5515	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board		C5516	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board		C5517	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board		C5518	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board		C5519	08E42327S01	CAP,CER. 10uF/10V
MAIN-P.W.Board		C5520	08E42327S01	CAP,CER. 10uF/10V
MAIN-P.W.Board		C5522	08E42327S01	CAP,CER. 10uF/10V
MAIN-P.W.Board		C5523	08E41036S01	CAP,CER. 1uF/16V
MAIN-P.W.Board		C5524	08E41036S01	CAP,CER. 1uF/16V
MAIN-P.W.Board		C5526	08E41036S01	CAP,CER. 1uF/16V
MAIN-P.W.Board		C5527	08E40854S01	CAP,CER. 2.2uF/16V
MAIN-P.W.Board		C5528	23E41346S01	CAP,CER. 0.22uF/50V

MAIN-P.W.Board		C5529	08E36567S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board		C5530	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board		C5531	08E42328S01	CAP,CER. 22uF/10V
MAIN-P.W.Board		C5532	08E42328S01	CAP,CER. 22uF/10V
MAIN-P.W.Board		C5533	08E42322S01	CAP,CER. 10uF/16V
MAIN-P.W.Board		C5534	08E42323S01	CAP,CER. 22pF/50V
MAIN-P.W.Board		C5535	08E42323S01	CAP,CER. 22pF/50V
MAIN-P.W.Board		C5536	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board		C5537	08E42323S01	CAP,CER. 22pF/50V
MAIN-P.W.Board		C5538	08E42323S01	CAP,CER. 22pF/50V
MAIN-P.W.Board		C5539	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board		C5540	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board		C5541	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board		C5542	08E42327S01	CAP,CER. 10uF/10V
MAIN-P.W.Board		C5544	08E41036S01	CAP,CER. 1uF/16V
MAIN-P.W.Board		C5545	08E42327S01	CAP,CER. 10uF/10V
MAIN-P.W.Board		C5547	08E41036S01	CAP,CER. 1uF/16V
MAIN-P.W.Board		C5548	08E42322S01	CAP,CER. 10uF/16V
MAIN-P.W.Board		C5549	08E42322S01	CAP,CER. 10uF/16V
MAIN-P.W.Board		C5550	08E36567S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board		C5552	08E40854S01	CAP,CER. 2.2uF/16V
MAIN-P.W.Board		C5553	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C5554	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C6001	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board		C6002	08E41036S01	CAP,CER. 1uF/16V
MAIN-P.W.Board		C6003	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board		C6004	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board		C6005	08E42322S01	CAP,CER. 10uF/16V
MAIN-P.W.Board		C6006	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C6007	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C6008	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C6009	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C6010	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C6011	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board		C6012	08E42322S01	CAP,CER. 10uF/16V
MAIN-P.W.Board		C6013	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C6014	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C6015	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C6016	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C6017	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C6018	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board		C6019	08E42322S01	CAP,CER. 10uF/16V
MAIN-P.W.Board		C6020	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C6021	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C6022	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C6023	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C6024	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C6025	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board		C6026	08E42322S01	CAP,CER. 10uF/16V
MAIN-P.W.Board		C6027	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C6028	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C6029	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C6030	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C6031	23E41346S01	CAP,CER. 0.22uF/50V

MAIN-P.W.Board		C6032	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C6033	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C6034	08E42427S01	METAL,560pF/50V
MAIN-P.W.Board		C6035	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C6036	08E42427S01	METAL,560pF/50V
MAIN-P.W.Board		C6037	08E42426S01	METAL,150pF/50V
MAIN-P.W.Board		C6038	08E42426S01	METAL,150pF/50V
MAIN-P.W.Board		C6039	08E42426S01	METAL,150pF/50V
MAIN-P.W.Board		C6040	08E42427S01	METAL,560pF/50V
MAIN-P.W.Board		C6041	08E42426S01	METAL,150pF/50V
MAIN-P.W.Board		C6042	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C6043	08E42426S01	METAL,150pF/50V
MAIN-P.W.Board		C6044	08E42426S01	METAL,150pF/50V
MAIN-P.W.Board		C6045	08E42426S01	METAL,150pF/50V
MAIN-P.W.Board		C6046	08E42427S01	METAL,560pF/50V
MAIN-P.W.Board		C6047	08E42426S01	METAL,150pF/50V
MAIN-P.W.Board		C6048	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C6049	08E42427S01	METAL,560pF/50V
MAIN-P.W.Board		C6050	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C6051	08E42426S01	METAL,150pF/50V
MAIN-P.W.Board		C6052	08E42426S01	METAL,150pF/50V
MAIN-P.W.Board		C6053	08E42426S01	METAL,150pF/50V
MAIN-P.W.Board		C6054	08E42427S01	METAL,560pF/50V
MAIN-P.W.Board		C6055	08E42426S01	METAL,150pF/50V
MAIN-P.W.Board		C6056	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C6057	08E42427S01	METAL,560pF/50V
MAIN-P.W.Board		C6058	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C6059	08E42426S01	METAL,150pF/50V
MAIN-P.W.Board		C6060	08E42426S01	METAL,150pF/50V
MAIN-P.W.Board		C6061	08E42426S01	METAL,150pF/50V
MAIN-P.W.Board		C6062	08E42427S01	METAL,560pF/50V
MAIN-P.W.Board		C6063	08E42426S01	METAL,150pF/50V
MAIN-P.W.Board		C6064	08E42327S01	CAP,CER. 10uF/10V
MAIN-P.W.Board		C6065	08E42327S01	CAP,CER. 10uF/10V
MAIN-P.W.Board		C6066	08E42327S01	CAP,CER. 10uF/10V
MAIN-P.W.Board		C6067	08E42327S01	CAP,CER. 10uF/10V
MAIN-P.W.Board		C6501	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C6502	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board		C6503	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C6504	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C6505	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C6506	08E42425S01	METAL,330pF/50V
MAIN-P.W.Board		C6507	08E42425S01	METAL,330pF/50V
MAIN-P.W.Board		C6508	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C6509	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C6510	08E42425S01	METAL,330pF/50V
MAIN-P.W.Board		C6511	08E42425S01	METAL,330pF/50V
MAIN-P.W.Board		C6512	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C6513	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C6514	08E42425S01	METAL,330pF/50V
MAIN-P.W.Board		C6515	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C6516	08E42425S01	METAL,330pF/50V
MAIN-P.W.Board		C6517	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C6518	08E42425S01	METAL,330pF/50V

MAIN-P.W.Board		C6519	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C6520	08E42425S01	METAL,330pF/50V
MAIN-P.W.Board		C6521	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C6522	08E42424S01	METAL,470pF/50V
MAIN-P.W.Board		C6523	08E42424S01	METAL,470pF/50V
MAIN-P.W.Board		C6524	08E42424S01	METAL,470pF/50V
MAIN-P.W.Board		C6525	08E42424S01	METAL,470pF/50V
MAIN-P.W.Board		C6526	08E42424S01	METAL,470pF/50V
MAIN-P.W.Board		C6527	08E42424S01	METAL,470pF/50V
MAIN-P.W.Board		C6528	08E42424S01	METAL,470pF/50V
MAIN-P.W.Board		C6529	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C6530	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C6531	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C6532	08E42424S01	METAL,470pF/50V
MAIN-P.W.Board		C6533	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C6534	08E42318S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board		C6535	08E42318S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board		C6536	08E42318S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board		C6537	08E42318S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board		C6538	08E40849S01	CAP,CER. 1000pF/630V
MAIN-P.W.Board		C6539	08E40849S01	CAP,CER. 1000pF/630V
MAIN-P.W.Board		C6540	08E40849S01	CAP,CER. 1000pF/630V
MAIN-P.W.Board		C6541	08E40849S01	CAP,CER. 1000pF/630V
MAIN-P.W.Board		C7001	08E42327S01	CAP,CER. 10uF/10V
MAIN-P.W.Board		C7002	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board		C7003	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board		C7004	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board		C7005	08E42327S01	CAP,CER. 10uF/10V
MAIN-P.W.Board		C7006	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board		C7007	08E42328S01	CAP,CER. 22uF/10V
MAIN-P.W.Board		C7008	08E42328S01	CAP,CER. 22uF/10V
MAIN-P.W.Board		C7009	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board		C7010	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board		C7011	08E38483S01	CAP,CER. 8pF/50V
MAIN-P.W.Board		C7012	08E38483S01	CAP,CER. 8pF/50V
MAIN-P.W.Board		C7013	08E38483S01	CAP,CER. 8pF/50V
MAIN-P.W.Board		C7014	08E38483S01	CAP,CER. 8pF/50V
MAIN-P.W.Board		C7015	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board		C7016	08E41036S01	CAP,CER. 1uF/16V
MAIN-P.W.Board		C7017	08E41036S01	CAP,CER. 1uF/16V
MAIN-P.W.Board		C7018	08E42139S01	CAP,CER.100pF/50V
MAIN-P.W.Board		C7019	08E42324S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board		C7020	08E42324S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board		C7021	08E42324S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board		C7022	08E42324S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board		C7023	08E42324S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board		C8001	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C8003	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C8004	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C8005	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C8006	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board		C8007	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board		C8008	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board		C8009	08E36680S01	CAP,CER. 1000pF/50V

MAIN-P.W.Board		C8010	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board		C8011	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board		C8013	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C8015	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C8016	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board		C8017	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board		C8018	08E38604S01	CAP,CER. 1uF/50V
MAIN-P.W.Board		C8019	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C8020	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C8021	08E36472S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board		C8022	08E36567S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board		C8024	08E36595S01	CAP,CER. 560pF/50V
MAIN-P.W.Board		C8025	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board		C8026	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C8027	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C8029	08E42328S01	CAP,CER. 22uF/10V
MAIN-P.W.Board		C8030	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C8031	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board		C8036	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board		C8037	08E36472S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board		C8040	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C8041	08E36472S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board		C8042	08E38423S01	CAP,CER. 0.033uF/25V
MAIN-P.W.Board		C8043	08E42328S01	CAP,CER. 22uF/10V
MAIN-P.W.Board		C8044	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C8045	08E41036S01	CAP,CER. 1uF/16V
MAIN-P.W.Board		C8046	08E42419S01	CAP,CER. 4700pF/50V
MAIN-P.W.Board		C8048	08E42328S01	CAP,CER. 22uF/10V
MAIN-P.W.Board		C8049	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C8050	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C8051	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C8052	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C8053	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C8054	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C8055	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C8056	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C8057	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C8058	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C8501	08E38604S01	CAP,CER. 1uF/50V
MAIN-P.W.Board		C8502	08E42421S01	CAP,CER. 4.7uF/25V
MAIN-P.W.Board		C8503	08E36472S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board		C8504	08E41035S01	CAP,CER. 0.01uF/630V
MAIN-P.W.Board		C8505	08E41035S01	CAP,CER. 0.01uF/630V
MAIN-P.W.Board		C8506	08E41035S01	CAP,CER. 0.01uF/630V
MAIN-P.W.Board		C8507	08E41035S01	CAP,CER. 0.01uF/630V
MAIN-P.W.Board		C8508	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board		C8509	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C8510	08E36472S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board		C8511	08E34594S01	CAP,CER. 3300pF/50V
MAIN-P.W.Board		C8512	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board		C8513	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C8514	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C8515	08E42319S01	CAP,CER. 2200pF/50V
MAIN-P.W.Board		C8516	08E38598S01	CAP,CER. 0.068uF/16V

MAIN-P.W.Board		C8517	08E42320S01	CAP,CER. 220pF/50V
MAIN-P.W.Board		C8518	08E36472S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board		C8519	08E41036S01	CAP,CER. 1uF/16V
MAIN-P.W.Board		C8520	08E41036S01	CAP,CER. 1uF/16V
MAIN-P.W.Board		C8521	08E41036S01	CAP,CER. 1uF/16V
MAIN-P.W.Board		C8522	08E38036S01	CAP,CER. 330pF/50V
MAIN-P.W.Board		C8523	08E38036S01	CAP,CER. 330pF/50V
MAIN-P.W.Board		C8524	08E42417S01	CAP,CER. 1500pF/50V
MAIN-P.W.Board		C8525	08E36567S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board		C8526	08E38604S01	CAP,CER. 1uF/50V
MAIN-P.W.Board		C8528	08E38604S01	CAP,CER. 1uF/50V
MAIN-P.W.Board		C8529	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C8530	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C8531	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C8533	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C8534	08E36565S01	CAP,CER. 120pF/50V
MAIN-P.W.Board		C8535	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C8536	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board		C8537	08E41035S01	CAP,CER. 0.01uF/630V
MAIN-P.W.Board		C8538	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board		C8539	08E40849S01	CAP,CER. 1000pF/630V
MAIN-P.W.Board		C8540	08E38604S01	CAP,CER. 1uF/50V
MAIN-P.W.Board		C8541	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C8542	08E36472S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board		C8543	08E42420S01	CAP,CER. 240pF/50V
MAIN-P.W.Board		C8545	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C8546	08E40854S01	CAP,CER. 2.2uF/16V
MAIN-P.W.Board		C8548	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board		C8549	08E36567S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board		C8551	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C8552	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		C9008	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board		CB1001	09E42375S01	CONN,WTB53398 7P
MAIN-P.W.Board		CB7001	09E42235S01	CONN,FFC 14P
MAIN-P.W.Board		CB8501	09E40142S01	CONN,PWR 8P
MAIN-P.W.Board		D1001	48E37885S01	DIODE,DAN222
MAIN-P.W.Board		D1002	48E40918S01	DIODE,KDS160
MAIN-P.W.Board		D1003	48E42351S01	DIODE,RF101L2S
MAIN-P.W.Board		D1004	48E42351S01	DIODE,RF101L2S
MAIN-P.W.Board		D1005	48E42431S01	DIO,SHOTTKY DB2S314
MAIN-P.W.Board		D1006	48E40918S01	DIODE,KDS160
MAIN-P.W.Board		D2001	48E37885S01	DIODE,DAN222
MAIN-P.W.Board		D2002	48E42351S01	DIODE,RF101L2S
MAIN-P.W.Board		D2003	48E40918S01	DIODE,KDS160
MAIN-P.W.Board		D5501	48E37887S01	DIODE,DA227
MAIN-P.W.Board		D6501	48E37887S01	DIODE,DA227
MAIN-P.W.Board		D6502	48E37887S01	DIODE,DA227
MAIN-P.W.Board		D6503	48E37887S01	DIODE,DA227
MAIN-P.W.Board		D6504	48E37887S01	DIODE,DA227
MAIN-P.W.Board		D7001	48E42443S01	VARISTOR,EZJZ0V800AA
MAIN-P.W.Board		D7002	48E42443S01	VARISTOR,EZJZ0V800AA
MAIN-P.W.Board		D8501	48E37885S01	DIODE,DAN222
MAIN-P.W.Board		D8502	48E37887S01	DIODE,DA227
MAIN-P.W.Board		D8503	48E37887S01	DIODE,DA227

MAIN-P.W.Board		DIN2001	09T55071W02	CONN,TCP9389 GREY
MAIN-P.W.Board		DIN2002	09T55071W02	CONN,TCP9389 GREY
MAIN-P.W.Board		E1001	23E42342S01	CAP,ELY.220uF/6.3V
MAIN-P.W.Board		E2001	23E42330S01	CAP,ELY.4.7uF/16V
MAIN-P.W.Board		E2002	23E42330S01	CAP,ELY.4.7uF/16V
MAIN-P.W.Board		E2003	23E42330S01	CAP,ELY.4.7uF/16V
MAIN-P.W.Board		E2004	23E42330S01	CAP,ELY.4.7uF/16V
MAIN-P.W.Board		E2005	23E42330S01	CAP,ELY.4.7uF/16V
MAIN-P.W.Board		E2006	23E42330S01	CAP,ELY.4.7uF/16V
MAIN-P.W.Board		E2007	23E42330S01	CAP,ELY.4.7uF/16V
MAIN-P.W.Board		E2008	23E42330S01	CAP,ELY.4.7uF/16V
MAIN-P.W.Board		E3001	08E42329S01	CAP,CER. 150uF/6.3V
MAIN-P.W.Board		E4001	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board		E4002	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board		E4003	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board		E4004	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board		E4005	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board		E4006	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board		E4007	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board		E4008	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board		E4009	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board		E4010	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board		E4011	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board		E4012	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board		E5001	23E42344S01	CAP,ELY.2.2uF/50V
MAIN-P.W.Board		E5002	23E42339S01	CAP,ELY.100uF/10V
MAIN-P.W.Board		E5003	23E42344S01	CAP,ELY.2.2uF/50V
MAIN-P.W.Board		E5004	23E42344S01	CAP,ELY.2.2uF/50V
MAIN-P.W.Board		E5005	23E42339S01	CAP,ELY.100uF/10V
MAIN-P.W.Board		E5006	23E42344S01	CAP,ELY.2.2uF/50V
MAIN-P.W.Board		E5007	23E42344S01	CAP,ELY.2.2uF/50V
MAIN-P.W.Board		E5008	23E42339S01	CAP,ELY.100uF/10V
MAIN-P.W.Board		E5009	23E42344S01	CAP,ELY.2.2uF/50V
MAIN-P.W.Board		E5010	23E42338S01	CAP,ELY.22uF/6.3V
MAIN-P.W.Board		E5011	23E42338S01	CAP,ELY.22uF/6.3V
MAIN-P.W.Board		E5012	23E42332S01	CAP,ELY.100uF/25V
MAIN-P.W.Board		E5013	23E42332S01	CAP,ELY.100uF/25V
MAIN-P.W.Board		E5014	23E42333S01	CAP,ELY.220uF/16V
MAIN-P.W.Board		E5501	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board		E5502	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board		E5503	23E42337S01	CAP,ELY.47uF/6.3V
MAIN-P.W.Board		E5504	23E42337S01	CAP,ELY.47uF/6.3V
MAIN-P.W.Board		E5505	23E42330S01	CAP,ELY.4.7uF/16V
MAIN-P.W.Board		E5506	23E42330S01	CAP,ELY.4.7uF/16V
MAIN-P.W.Board		E5507	23E42330S01	CAP,ELY.4.7uF/16V
MAIN-P.W.Board		E5508	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board		E5509	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board		E5510	23E42347S01	CAP,ELY.33uF/10V
MAIN-P.W.Board		E5511	23E42347S01	CAP,ELY.33uF/10V
MAIN-P.W.Board		E5512	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board		E6001	23E42340S01	CAP,ELY.22uF/25V
MAIN-P.W.Board		E6002	23E42338S01	CAP,ELY.22uF/6.3V
MAIN-P.W.Board		E6003	23E42338S01	CAP,ELY.22uF/6.3V
MAIN-P.W.Board		E6004	23E42340S01	CAP,ELY.22uF/25V

MAIN-P.W.Board		E6005	23E42338S01	CAP,ELY.22uF/6.3V
MAIN-P.W.Board		E6006	23E42338S01	CAP,ELY.22uF/6.3V
MAIN-P.W.Board		E6007	23E42340S01	CAP,ELY.22uF/25V
MAIN-P.W.Board		E6008	23E42338S01	CAP,ELY.22uF/6.3V
MAIN-P.W.Board		E6009	23E42338S01	CAP,ELY.22uF/6.3V
MAIN-P.W.Board		E6010	23E42340S01	CAP,ELY.22uF/25V
MAIN-P.W.Board		E6011	23E42338S01	CAP,ELY.22uF/6.3V
MAIN-P.W.Board		E6012	23E42338S01	CAP,ELY.22uF/6.3V
MAIN-P.W.Board		E6013	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board		E6014	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board		E6015	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board		E6016	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board		E6017	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board		E6018	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board		E6019	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board		E6020	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board		E6021	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board		E6022	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board		E6023	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board		E6024	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board		E6025	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board		E6026	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board		E6027	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board		E6028	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board		E6029	23E42332S01	CAP,ELY.100uF/25V
MAIN-P.W.Board		E6030	23E42332S01	CAP,ELY.100uF/25V
MAIN-P.W.Board		E6501	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board		E6502	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board		E6503	23E42335S01	CAP,ELY.22uF/16V
MAIN-P.W.Board		E6504	23E42335S01	CAP,ELY.22uF/16V
MAIN-P.W.Board		E6505	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board		E6506	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board		E6507	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board		E6508	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board		E6509	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board		E6510	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board		E6511	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board		E6512	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board		E6513	23E42335S01	CAP,ELY.22uF/16V
MAIN-P.W.Board		E6514	23E42335S01	CAP,ELY.22uF/16V
MAIN-P.W.Board		E6515	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board		E6516	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board		E6517	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board		E6518	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board		E6519	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board		E6520	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board		E8001	23E42343S01	CAP,ELY.330uF/6.3V
MAIN-P.W.Board		E8002	23E42332S01	CAP,ELY.100uF/25V
MAIN-P.W.Board		E8003	23E42331S01	CAP,ELY.330uF/25V
MAIN-P.W.Board		E8004	23E42345S01	CAP,ELY.33uF/25V
MAIN-P.W.Board		E8006	23E42345S01	CAP,ELY.33uF/25V
MAIN-P.W.Board		E8007	23E42332S01	CAP,ELY.100uF/25V
MAIN-P.W.Board		E8008	23E42347S01	CAP,ELY.33uF/10V
MAIN-P.W.Board		E8009	23E41341S01	CAP,ELY.47uF/25V

MAIN-P.W.Board		E8010	23E41338S01	CAP,ELY.47uF/16V
MAIN-P.W.Board		E8011	23E41341S01	CAP,ELY.47uF/25V
MAIN-P.W.Board		E8012	23E42345S01	CAP,ELY.33uF/25V
MAIN-P.W.Board		E8013	23E42332S01	CAP,ELY.100uF/25V
MAIN-P.W.Board		E8014	23E42332S01	CAP,ELY.100uF/25V
MAIN-P.W.Board		E8015	23E42346S01	CAP,ELY.22uF/16V
MAIN-P.W.Board		E8501	23E42334S01	CAP,ELY.22uF/25V
MAIN-P.W.Board		E8502	23E42331S01	CAP,ELY.330uF/25V
MAIN-P.W.Board		E8504	23E41342S01	CAP,ELY.470uF/25V
MAIN-P.W.Board		E8505	23E42331S01	CAP,ELY.330uF/25V
MAIN-P.W.Board		E8506	23E42331S01	CAP,ELY.330uF/25V
MAIN-P.W.Board		E8507	23E42331S01	CAP,ELY.330uF/25V
MAIN-P.W.Board		E8508	23E41341S01	CAP,ELY.47uF/25V
MAIN-P.W.Board		E8509	23E42331S01	CAP,ELY.330uF/25V
MAIN-P.W.Board		E8510	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board		E8511	23E42270S01	CAP,ELY.3300uF/25V
MAIN-P.W.Board		E8514	23E41341S01	CAP,ELY.47uF/25V
MAIN-P.W.Board		E8515	23E42332S01	CAP,ELY.100uF/25V
MAIN-P.W.Board		E8516	23E42345S01	CAP,ELY.33uF/25V
MAIN-P.W.Board		E8517	23E42331S01	CAP,ELY.330uF/25V
MAIN-P.W.Board		E8518	23E42341S01	CAP,ELY.220uF/25V
MAIN-P.W.Board		E8519	23E42346S01	CAP,ELY.22uF/16V
MAIN-P.W.Board		F2001	65T75477Y13	FUSE,CCP2E 4.0A -CP
MAIN-P.W.Board		IC1001	51E40862S01	IC,TC7SH08FU
MAIN-P.W.Board		IC1002	51E42444S01	IC,UPD70F3348GJ
MAIN-P.W.Board		IC1003	51E42362S01	IC,M24512-WM
MAIN-P.W.Board		IC1004	51E42359S01	IC,TC7SH04FU
MAIN-P.W.Board		IC1005	51E37932S01	IC,TC7SH00FU
MAIN-P.W.Board		IC1006	51E42360S01	IC,TC7SH32FU
MAIN-P.W.Board		IC1007	51E42447S01	IC,S-875077AUP
MAIN-P.W.Board		IC1008	51E42361S01	IC,S-80923CNMC
MAIN-P.W.Board		IC1009	51E42446S01	IC,M25P80-VMW
MAIN-P.W.Board		IC1010	51E40862S01	IC,TC7SH08FU
MAIN-P.W.Board		IC1011	51E39130S01	IC,LM20BIM7
MAIN-P.W.Board		IC1012	51E42357S01	IC,TC74VHCT541AFT
MAIN-P.W.Board		IC1013	51E42358S01	IC,S-80960CNMC
MAIN-P.W.Board		IC2001	51E42366S01	IC,NJM4580R
MAIN-P.W.Board		IC2002	51E42366S01	IC,NJM4580R
MAIN-P.W.Board		IC2003	51T55070W05	MB88385CPF-ER -SE9
MAIN-P.W.Board		IC2004	51E36570S01	IC,NJM2903V
MAIN-P.W.Board		IC2005	51E39397S01	IC,MC14538BFELG
MAIN-P.W.Board		IC2006	51E40862S01	IC,TC7SH08FU
MAIN-P.W.Board		IC3001	51-16522Z01	ADSP-21365BSWZ -QT
MAIN-P.W.Board		IC3501	51-14103Z01	ADSP-21363BSWZ -QT
MAIN-P.W.Board		IC4001	51E42366S01	IC,NJM4580R
MAIN-P.W.Board		IC4002	51E42366S01	IC,NJM4580R
MAIN-P.W.Board		IC4003	51E42366S01	IC,NJM4580R
MAIN-P.W.Board		IC4004	51E42366S01	IC,NJM4580R
MAIN-P.W.Board		IC4005	51E42366S01	IC,NJM4580R
MAIN-P.W.Board		IC4006	51E42366S01	IC,NJM4580R
MAIN-P.W.Board		IC4007	51E42366S01	IC,NJM4580R
MAIN-P.W.Board		IC4008	51E42366S01	IC,NJM4580R
MAIN-P.W.Board		IC4009	51E42366S01	IC,NJM4580R
MAIN-P.W.Board		IC5001	51E42366S01	IC,NJM4580R

MAIN-P.W.Board		IC5002	51E42366S01	IC,NJM4580R
MAIN-P.W.Board		IC5003	51E42366S01	IC,NJM4580R
MAIN-P.W.Board		IC5004	51E42366S01	IC,NJM4580R
MAIN-P.W.Board		IC5005	51E42366S01	IC,NJM4580R
MAIN-P.W.Board		IC5006	51E42366S01	IC,NJM4580R
MAIN-P.W.Board		IC5007	51-16504Z01	CS2100CP-DZZR -SE2
MAIN-P.W.Board		IC5008	51-16506Z01	CS5366-DQZ -QT
MAIN-P.W.Board		IC5501	51-04219Z01	WM8782SEDS/R -SE6
MAIN-P.W.Board		IC5502	51-04219Z01	WM8782SEDS/R -SE6
MAIN-P.W.Board		IC5503	51-04219Z01	WM8782SEDS/R -SE6
MAIN-P.W.Board		IC5504	51E42365S01	IC,NJM2140RB1
MAIN-P.W.Board		IC5505	51E42366S01	IC,NJM4580R
MAIN-P.W.Board		IC5506	51E40862S01	IC,TC7SH08FU
MAIN-P.W.Board		IC5507	51E40862S01	IC,TC7SH08FU
MAIN-P.W.Board		IC5508	51E40862S01	IC,TC7SH08FU
MAIN-P.W.Board		IC5509	51E42451S01	IC,NJW1159V
MAIN-P.W.Board		IC5510	51E36474S01	IC,NJM78L05UA
MAIN-P.W.Board		IC5511	51E38065S01	IC,NJM79L05UA
MAIN-P.W.Board		IC6001	51-16668Z01	WM8742GEDS/RV -SE6
MAIN-P.W.Board		IC6002	51-16668Z01	WM8742GEDS/RV -SE6
MAIN-P.W.Board		IC6003	51-16668Z01	WM8742GEDS/RV -SE6
MAIN-P.W.Board		IC6004	51E42366S01	IC,NJM4580R
MAIN-P.W.Board		IC6005	51E42366S01	IC,NJM4580R
MAIN-P.W.Board		IC6006	51E42366S01	IC,NJM4580R
MAIN-P.W.Board		IC6007	51E42366S01	IC,NJM4580R
MAIN-P.W.Board		IC6008	51-16668Z01	WM8742GEDS/RV -SE6
MAIN-P.W.Board		IC6009	51-16504Z01	CS2100CP-DZZR -SE2
MAIN-P.W.Board		IC6501	51E42366S01	IC,NJM4580R
MAIN-P.W.Board		IC6502	51E42366S01	IC,NJM4580R
MAIN-P.W.Board		IC6503	51E42366S01	IC,NJM4580R
MAIN-P.W.Board		IC6504	51E42366S01	IC,NJM4580R
MAIN-P.W.Board		IC6505	51-16622Z01	CS3318-DQZ -QT
MAIN-P.W.Board		IC7001	51E42445S01	IC,AK4117VF
MAIN-P.W.Board		IC7002	51T45265W03	TORX193 -NS
MAIN-P.W.Board		IC7003	51E40862S01	IC,TC7SH08FU
MAIN-P.W.Board		IC7004	51E40862S01	IC,TC7SH08FU
MAIN-P.W.Board		IC7005	51T45265W03	TORX193 -NS
MAIN-P.W.Board		IC7006	51E42454S01	IC,MAX3420EEC
MAIN-P.W.Board		IC8001	51E42450S01	IC,BD3571FP
MAIN-P.W.Board		IC8002	51E42363S01	IC,BD00C0AWFP
MAIN-P.W.Board		IC8003	51E42452S01	IC,LM2830ZMF
MAIN-P.W.Board		IC8004	51E42448S01	IC,BD3570FP
MAIN-P.W.Board		IC8006	51E40866S01	IC, BD9778HFP
MAIN-P.W.Board		IC8007	51E42363S01	IC,BD00C0AWFP
MAIN-P.W.Board		IC8008	51E42455S01	IC,LM20143MHX
MAIN-P.W.Board		IC8501	51E42449S01	IC,BA4910FP
MAIN-P.W.Board		IC8502	51E42364S01	IC,BA9743AFV
MAIN-P.W.Board		IC8503	51E42363S01	IC,BD00C0AWFP
MAIN-P.W.Board		IC8504	51E42363S01	IC,BD00C0AWFP
MAIN-P.W.Board		IC8505	51E36642S01	IC,NJM2360AM
MAIN-P.W.Board		IC8506	51E42453S01	IC,LM5118MHX
MAIN-P.W.Board		IC8507	51E42363S01	IC,BD00C0AWFP
MAIN-P.W.Board		JK5501	09T55293Y03	JAC,HSJ6061-01-250DB
MAIN-P.W.Board		L1002	91E42349S01	FIL,EMI BLM21PG221SH1D

MAIN-P.W.Board		L1003	91E42348S01	FIL,EMI BLM18AG102SH1D
MAIN-P.W.Board		L1004	91E42348S01	FIL,EMI BLM18AG102SH1D
MAIN-P.W.Board		L1005	91E42348S01	FIL,EMI BLM18AG102SH1D
MAIN-P.W.Board		L3001	91E42348S01	FIL,EMI BLM18AG102SH1D
MAIN-P.W.Board		L3501	91E42348S01	FIL,EMI BLM18AG102SH1D
MAIN-P.W.Board		L6001	24E42373S01	COIL,IND. 10uH
MAIN-P.W.Board		L6002	24E42373S01	COIL,IND. 10uH
MAIN-P.W.Board		L6003	24E42373S01	COIL,IND. 10uH
MAIN-P.W.Board		L6004	24E42373S01	COIL,IND. 10uH
MAIN-P.W.Board		L7001	24E42374S01	COIL,IND. 47uH
MAIN-P.W.Board		L7002	24E42374S01	COIL,IND. 47uH
MAIN-P.W.Board		L8001	24E42372S01	COIL,IND. 3.3uH
MAIN-P.W.Board		L8003	24E42368S01	COIL,IND. 100uH
MAIN-P.W.Board		L8004	24E42372S01	COIL,IND. 3.3uH
MAIN-P.W.Board		L8006	24E42371S01	COIL,IND. 1.5uH
MAIN-P.W.Board		L8501	24E42370S01	COIL,IND. 220uH
MAIN-P.W.Board		L8502	24E42370S01	COIL,IND. 220uH
MAIN-P.W.Board		L8503	24E42367S01	COIL,IND. 22uH
MAIN-P.W.Board		L8505	24E42369S01	COIL,IND. 470uH
MAIN-P.W.Board		L9001	24E42372S01	COIL,IND. 3.3uH
MAIN-P.W.Board		Q1001	48E41053S01	TR,FMC2
MAIN-P.W.Board		Q1002	48E42356S01	TR,DTC143XUA
MAIN-P.W.Board		Q1003	48E42354S01	TR,DTA123YUA
MAIN-P.W.Board		Q1004	48E42355S01	TR,DTC124EUA
MAIN-P.W.Board		Q2001	48E42355S01	TR,DTC124EUA
MAIN-P.W.Board		Q2002	48E41053S01	TR,FMC2
MAIN-P.W.Board		Q4001	48E42172S01	TR,IMX25
MAIN-P.W.Board		Q4002	48E42354S01	TR,DTA123YUA
MAIN-P.W.Board		Q4003	48E42356S01	TR,DTC143XUA
MAIN-P.W.Board		Q4004	48E42354S01	TR,DTA123YUA
MAIN-P.W.Board		Q4005	48E42356S01	TR,DTC143XUA
MAIN-P.W.Board		Q4006	48E42356S01	TR,DTC143XUA
MAIN-P.W.Board		Q4007	48E42354S01	TR,DTA123YUA
MAIN-P.W.Board		Q4008	48E42172S01	TR,IMX25
MAIN-P.W.Board		Q4009	48E42172S01	TR,IMX25
MAIN-P.W.Board		Q4010	48E42172S01	TR,IMX25
MAIN-P.W.Board		Q4011	48E42172S01	TR,IMX25
MAIN-P.W.Board		Q4012	48E42172S01	TR,IMX25
MAIN-P.W.Board		Q6501	48E42172S01	TR,IMX25
MAIN-P.W.Board		Q6502	48E42172S01	TR,IMX25
MAIN-P.W.Board		Q6503	48E42172S01	TR,IMX25
MAIN-P.W.Board		Q6504	48E42172S01	TR,IMX25
MAIN-P.W.Board		Q6505	48E42437S01	TR,DTC114YUA
MAIN-P.W.Board		Q6506	48E42440S01	TR,DTA114YUA
MAIN-P.W.Board		Q7003	48E42356S01	TR,DTC143XUA
MAIN-P.W.Board		Q7004	48E42353S01	TR,DTA143XUA
MAIN-P.W.Board		Q8001	48E42438S01	TR,DTC124TUA
MAIN-P.W.Board		Q8003	48E42437S01	TR,DTC114YUA
MAIN-P.W.Board		Q8004	48E42434S01	TR,2SA2018
MAIN-P.W.Board		Q8006	48E42434S01	TR,2SA2018
MAIN-P.W.Board		Q8501	48E42438S01	TR,DTC124TUA
MAIN-P.W.Board		Q8502	48E42436S01	TR,PBSS5350X
MAIN-P.W.Board		Q8503	48E42353S01	TR,DTA143XUA
MAIN-P.W.Board		Q8504	48E42437S01	TR,DTC114YUA

MAIN-P.W.Board		Q8505	48E41053S01	TR,FMC2
MAIN-P.W.Board		Q8506	48E37895S01	TR,IMZ4108
MAIN-P.W.Board		Q8507	48E37895S01	TR,IMZ4108
MAIN-P.W.Board		Q8508	48E42436S01	TR,PBSS5350X
MAIN-P.W.Board		Q8509	48E42437S01	TR,DTC114YUA
MAIN-P.W.Board		Q8510	48E42441S01	FET,RSR020P03
MAIN-P.W.Board		Q8511	48E42441S01	FET,RSR020P03
MAIN-P.W.Board		Q8512	48E42437S01	TR,DTC114YUA
MAIN-P.W.Board		Q8513	48E42353S01	TR,DTA143XUA
MAIN-P.W.Board		Q8519	48E42435S01	TR,2SC4672
MAIN-P.W.Board		Q8520	48E42436S01	TR,PBSS5350X
MAIN-P.W.Board		Q8521	48E42439S01	TR,DTC143EUA
MAIN-P.W.Board		Q8522	48E42433S01	TR,KTA2014
MAIN-P.W.Board		Q8523	48E42439S01	TR,DTC143EUA
MAIN-P.W.Board		Q8524	48E42356S01	TR,DTC143XUA
MAIN-P.W.Board		Q8525	48E42442S01	FET,RSD050N06
MAIN-P.W.Board		Q8526	48E42442S01	FET,RSD050N06
MAIN-P.W.Board		Q8528	48E42432S01	TR,2SD2114K
MAIN-P.W.Board		Q8529	48E41053S01	TR,FMC2
MAIN-P.W.Board		R1001	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board		R1002	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board		R1003	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board		R1004	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board		R1005	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board		R1006	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board		R1007	06E42287S01	RES,CF. 47K-1/16W
MAIN-P.W.Board		R1008	06E35366S01	RES,CF. 4.7K-1/4W
MAIN-P.W.Board		R1009	06E40745S01	RES,CF. 47K-1/16W
MAIN-P.W.Board		R1010	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board		R1011	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board		R1012	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board		R1013	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board		R1014	06E42384S01	RES,CF. 2.2K-1/16W
MAIN-P.W.Board		R1015	06E42299S01	RES,CF. 1K-1/16W
MAIN-P.W.Board		R1016	06E42281S01	RES,CF. 68K-1/16W
MAIN-P.W.Board		R1017	06E42296S01	RES,CF. 47K-1/16W
MAIN-P.W.Board		R1018	06E42296S01	RES,CF. 47K-1/16W
MAIN-P.W.Board		R1019	06E42279S01	RES,CF. 27K-1/16W
MAIN-P.W.Board		R1020	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board		R1021	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board		R1022	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board		R1023	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board		R1024	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board		R1025	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board		R1026	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board		R1027	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board		R1028	06E42384S01	RES,CF. 2.2K-1/16W
MAIN-P.W.Board		R1029	06E42276S01	RES,CF. 47R-1/16W
MAIN-P.W.Board		R1030	06E36460S01	RES,CF. 330-1/4W
MAIN-P.W.Board		R1031	06E36460S01	RES,CF. 330-1/4W
MAIN-P.W.Board		R1032	06E36460S01	RES,CF. 330-1/4W
MAIN-P.W.Board		R1033	06E36460S01	RES,CF. 330-1/4W
MAIN-P.W.Board		R1034	06E36460S01	RES,CF. 330-1/4W
MAIN-P.W.Board		R1035	06E42282S01	RES,CF. 47-1/16W

MAIN-P.W.Board		R1036	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board		R1037	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board		R1038	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board		R1039	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board		R1040	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board		R1041	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board		R1042	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board		R1043	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board		R1044	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board		R1045	06E42398S01	RES,CF. 390-1/16W
MAIN-P.W.Board		R1046	06E42296S01	RES,CF. 47K-1/16W
MAIN-P.W.Board		R1047	06E42296S01	RES,CF. 47K-1/16W
MAIN-P.W.Board		R1048	06E42296S01	RES,CF. 47K-1/16W
MAIN-P.W.Board		R1049	06E42296S01	RES,CF. 47K-1/16W
MAIN-P.W.Board		R1050	06E42296S01	RES,CF. 47K-1/16W
MAIN-P.W.Board		R1051	06E42296S01	RES,CF. 47K-1/16W
MAIN-P.W.Board		R1052	06E42287S01	RES,CF. 47K-1/16W
MAIN-P.W.Board		R1053	06E40829S01	RES,CF. 47K-1/10W
MAIN-P.W.Board		R1054	06E40829S01	RES,CF. 47K-1/10W
MAIN-P.W.Board		R1058	06E42287S01	RES,CF. 47K-1/16W
MAIN-P.W.Board		R1059	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board		R1060	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board		R1061	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board		R1062	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board		R1063	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board		R1064	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board		R1065	06E42301S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board		R1066	06E42295S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R1067	06E42295S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R1068	06E42288S01	RES,CF. 470-1/16W
MAIN-P.W.Board		R1069	06E42288S01	RES,CF. 470-1/16W
MAIN-P.W.Board		R1070	06E42389S01	RES,CF. 3.3K-1/16W
MAIN-P.W.Board		R1071	06E42389S01	RES,CF. 3.3K-1/16W
MAIN-P.W.Board		R1072	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board		R1073	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board		R1074	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board		R1075	06E42287S01	RES,CF. 47K-1/16W
MAIN-P.W.Board		R1076	06E42287S01	RES,CF. 47K-1/16W
MAIN-P.W.Board		R1077	06E40828S01	RES,CF. 0-1/10W
MAIN-P.W.Board		R1078	06E42296S01	RES,CF. 47K-1/16W
MAIN-P.W.Board		R1080	06E42287S01	RES,CF. 47K-1/16W
MAIN-P.W.Board		R1081	06E40828S01	RES,CF. 0-1/10W
MAIN-P.W.Board		R1083	06E42283S01	RES,CF. 22K-1/16W
MAIN-P.W.Board		R1085	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board		R1086	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board		R1087	06E42276S01	RES,CF. 47R-1/16W
MAIN-P.W.Board		R1088	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board		R1089	06E42283S01	RES,CF. 22K-1/16W
MAIN-P.W.Board		R1090	06E42287S01	RES,CF. 47K-1/16W
MAIN-P.W.Board		R1091	06E42287S01	RES,CF. 47K-1/16W
MAIN-P.W.Board		R1092	06E42287S01	RES,CF. 47K-1/16W
MAIN-P.W.Board		R1093	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board		R1094	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board		R1095	06E42282S01	RES,CF. 47-1/16W

MAIN-P.W.Board		R1096	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board		R1097	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board		R1098	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board		R1099	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board		R1100	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board		R1101	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board		R1102	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board		R1103	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board		R1104	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board		R1105	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board		R1106	06E42287S01	RES,CF. 47K-1/16W
MAIN-P.W.Board		R1107	06E42284S01	RES,CF. 22K-1/16W
MAIN-P.W.Board		R1108	06E42296S01	RES,CF. 47K-1/16W
MAIN-P.W.Board		R1109	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board		R1110	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board		R1111	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board		R1112	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board		R1113	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board		R1114	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board		R1115	06E42295S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R1117	06E41386S01	RES,CF. 10K-1/4W
MAIN-P.W.Board		R1118	06E42306S01	RES,CF. 1.1K-1/4W
MAIN-P.W.Board		R1119	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board		R1120	06E41386S01	RES,CF. 10K-1/4W
MAIN-P.W.Board		R1121	06E42384S01	RES,CF. 2.2K-1/16W
MAIN-P.W.Board		R1122	06E42386S01	RES,CF. 120K-1/16W
MAIN-P.W.Board		R1123	06E42389S01	RES,CF. 3.3K-1/16W
MAIN-P.W.Board		R1124	06E42296S01	RES,CF. 47K-1/16W
MAIN-P.W.Board		R1125	06E42296S01	RES,CF. 47K-1/16W
MAIN-P.W.Board		R1126	06E42296S01	RES,CF. 47K-1/16W
MAIN-P.W.Board		R1127	06E42296S01	RES,CF. 47K-1/16W
MAIN-P.W.Board		R1128	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board		R1129	06E42301S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board		R1130	06E42301S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board		R1132	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board		R1133	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board		R1134	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board		R1135	06E42287S01	RES,CF. 47K-1/16W
MAIN-P.W.Board		R1136	06E37253S01	RES,CF. 10K-1/4W
MAIN-P.W.Board		R1137	06E42283S01	RES,CF. 22K-1/16W
MAIN-P.W.Board		R1139	06E42284S01	RES,CF. 22K-1/16W
MAIN-P.W.Board		R1140	06E36460S01	RES,CF. 330-1/4W
MAIN-P.W.Board		R1141	06E40829S01	RES,CF. 47K-1/10W
MAIN-P.W.Board		R1142	06E40829S01	RES,CF. 47K-1/10W
MAIN-P.W.Board		R1143	06E42296S01	RES,CF. 47K-1/16W
MAIN-P.W.Board		R1144	06E42133S01	RES,CF. 100K-1/16W
MAIN-P.W.Board	\$1	R1145	06E42275S01	RES,CF. 4.7K-1/10W
MAIN-P.W.Board	#1	R1146	06E42275S01	RES,CF. 4.7K-1/10W
MAIN-P.W.Board	%1	R1146	06E42275S01	RES,CF. 4.7K-1/10W
MAIN-P.W.Board		R1147	06E42301S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board		R1148	06E42288S01	RES,CF. 470-1/16W
MAIN-P.W.Board		R1149	06E42299S01	RES,CF. 1K-1/16W
MAIN-P.W.Board		R1151	06E42287S01	RES,CF. 47K-1/16W
MAIN-P.W.Board		R1152	06E40828S01	RES,CF. 0-1/10W

MAIN-P.W.Board		R1153	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board		R1154	06E42287S01	RES,CF. 47K-1/16W
MAIN-P.W.Board		R2001	06E42227S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board		R2002	06E42227S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board		R2003	06E35359S01	RES,CF. 160-1/4W
MAIN-P.W.Board		R2004	06E35359S01	RES,CF. 160-1/4W
MAIN-P.W.Board		R2005	06E35359S01	RES,CF. 160-1/4W
MAIN-P.W.Board		R2006	06E42284S01	RES,CF. 22K-1/16W
MAIN-P.W.Board		R2007	06E42284S01	RES,CF. 22K-1/16W
MAIN-P.W.Board		R2008	06E42284S01	RES,CF. 22K-1/16W
MAIN-P.W.Board		R2009	06E42284S01	RES,CF. 22K-1/16W
MAIN-P.W.Board		R2010	06E42300S01	RES,CF. 330-1/16W
MAIN-P.W.Board		R2011	06E42300S01	RES,CF. 330-1/16W
MAIN-P.W.Board		R2012	06E42284S01	RES,CF. 22K-1/16W
MAIN-P.W.Board		R2013	06E42284S01	RES,CF. 22K-1/16W
MAIN-P.W.Board		R2014	06E42284S01	RES,CF. 22K-1/16W
MAIN-P.W.Board		R2015	06E42284S01	RES,CF. 22K-1/16W
MAIN-P.W.Board		R2016	06E42284S01	RES,CF. 22K-1/16W
MAIN-P.W.Board		R2017	06E42284S01	RES,CF. 22K-1/16W
MAIN-P.W.Board		R2018	06E42284S01	RES,CF. 22K-1/16W
MAIN-P.W.Board		R2019	06E42284S01	RES,CF. 22K-1/16W
MAIN-P.W.Board		R2020	06E42300S01	RES,CF. 330-1/16W
MAIN-P.W.Board		R2021	06E42300S01	RES,CF. 330-1/16W
MAIN-P.W.Board		R2022	06E42284S01	RES,CF. 22K-1/16W
MAIN-P.W.Board		R2023	06E42284S01	RES,CF. 22K-1/16W
MAIN-P.W.Board		R2024	06E42284S01	RES,CF. 22K-1/16W
MAIN-P.W.Board		R2025	06E42284S01	RES,CF. 22K-1/16W
MAIN-P.W.Board		R2026	06E42227S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board		R2027	06E42227S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board		R2028	06E42227S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board		R2029	06E42227S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board		R2030	06E42227S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board		R2031	06E35359S01	RES,CF. 160-1/4W
MAIN-P.W.Board		R2032	06E42403S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board		R2033	06E42403S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board		R2034	06E42294S01	RES,CF. 2.2K-1/16W
MAIN-P.W.Board		R2035	06E42294S01	RES,CF. 2.2K-1/16W
MAIN-P.W.Board		R2036	06E42296S01	RES,CF. 47K-1/16W
MAIN-P.W.Board		R2037	06E42277S01	RES,CF. 15K-1/16W
MAIN-P.W.Board		R2038	06E42394S01	RES,CF. 8.2K-1/16W
MAIN-P.W.Board		R2039	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R2040	06E42401S01	RES,CF. 27K-1/16W
MAIN-P.W.Board		R2041	06E42134S01	RES,CF. 1M-1/16W
MAIN-P.W.Board		R2042	06E42290S01	RES,CF. 330K-1/16W
MAIN-P.W.Board		R2043	06E42385S01	RES,CF. 470K-1/16W
MAIN-P.W.Board		R2044	06E42287S01	RES,CF. 47K-1/16W
MAIN-P.W.Board		R2045	06E35366S01	RES,CF. 4.7K-1/4W
MAIN-P.W.Board		R2046	06E40745S01	RES,CF. 47K-1/16W
MAIN-P.W.Board		R2047	06E40828S01	RES,CF. 0-1/10W
MAIN-P.W.Board		R2048	06E40828S01	RES,CF. 0-1/10W
MAIN-P.W.Board		R2049	06E40828S01	RES,CF. 0-1/10W
MAIN-P.W.Board		R2050	06E40828S01	RES,CF. 0-1/10W
MAIN-P.W.Board		R2051	06E40828S01	RES,CF. 0-1/10W
MAIN-P.W.Board		R2052	06E40828S01	RES,CF. 0-1/10W

MAIN-P.W.Board		R3001	06E42274S01	RES,CF. 100-1/10W
MAIN-P.W.Board		R3002	06E42274S01	RES,CF. 100-1/10W
MAIN-P.W.Board		R3003	06E42274S01	RES,CF. 100-1/10W
MAIN-P.W.Board		R3004	06E42274S01	RES,CF. 100-1/10W
MAIN-P.W.Board		R3005	06E42274S01	RES,CF. 100-1/10W
MAIN-P.W.Board		R3006	06E42274S01	RES,CF. 100-1/10W
MAIN-P.W.Board		R3007	06E42274S01	RES,CF. 100-1/10W
MAIN-P.W.Board		R3009	06E42274S01	RES,CF. 100-1/10W
MAIN-P.W.Board		R3010	06E42274S01	RES,CF. 100-1/10W
MAIN-P.W.Board		R3011	06E40828S01	RES,CF. 0-1/10W
MAIN-P.W.Board		R3012	06E40828S01	RES,CF. 0-1/10W
MAIN-P.W.Board		R3013	06E40828S01	RES,CF. 0-1/10W
MAIN-P.W.Board		R3014	06E40828S01	RES,CF. 0-1/10W
MAIN-P.W.Board		R3015	06E40828S01	RES,CF. 0-1/10W
MAIN-P.W.Board		R3016	06E40828S01	RES,CF. 0-1/10W
MAIN-P.W.Board		R3017	06E42274S01	RES,CF. 100-1/10W
MAIN-P.W.Board		R3018	06E42274S01	RES,CF. 100-1/10W
MAIN-P.W.Board		R3019	06E42274S01	RES,CF. 100-1/10W
MAIN-P.W.Board		R3020	06E42274S01	RES,CF. 100-1/10W
MAIN-P.W.Board		R3021	06E40840S01	RES,CF. 10K-1/10W
MAIN-P.W.Board		R3023	06E40840S01	RES,CF. 10K-1/10W
MAIN-P.W.Board		R3024	06E40840S01	RES,CF. 10K-1/10W
MAIN-P.W.Board		R3025	06E40835S01	RES,CF. 1.5K-1/10W
MAIN-P.W.Board		R3026	06E40838S01	RES,CF. 4.7K-1/10W
MAIN-P.W.Board		R3027	06E40840S01	RES,CF. 10K-1/10W
MAIN-P.W.Board		R3028	06E40840S01	RES,CF. 10K-1/10W
MAIN-P.W.Board		R3029	06E40840S01	RES,CF. 10K-1/10W
MAIN-P.W.Board		R3030	06E40840S01	RES,CF. 10K-1/10W
MAIN-P.W.Board		R3032	06E40828S01	RES,CF. 0-1/10W
MAIN-P.W.Board		R3033	06E40828S01	RES,CF. 0-1/10W
MAIN-P.W.Board		R3037	06E42274S01	RES,CF. 100-1/10W
MAIN-P.W.Board		R3038	06E42274S01	RES,CF. 100-1/10W
MAIN-P.W.Board		R3039	06E36583S01	RES,CF. 0-1/4W
MAIN-P.W.Board		R3040	06E36583S01	RES,CF. 0-1/4W
MAIN-P.W.Board		R3501	06E42274S01	RES,CF. 100-1/10W
MAIN-P.W.Board		R3502	06E42274S01	RES,CF. 100-1/10W
MAIN-P.W.Board		R3503	06E42274S01	RES,CF. 100-1/10W
MAIN-P.W.Board		R3504	06E42274S01	RES,CF. 100-1/10W
MAIN-P.W.Board		R3505	06E40828S01	RES,CF. 0-1/10W
MAIN-P.W.Board		R3506	06E40828S01	RES,CF. 0-1/10W
MAIN-P.W.Board		R3507	06E40828S01	RES,CF. 0-1/10W
MAIN-P.W.Board		R3508	06E40828S01	RES,CF. 0-1/10W
MAIN-P.W.Board		R3509	06E40828S01	RES,CF. 0-1/10W
MAIN-P.W.Board		R3510	06E40828S01	RES,CF. 0-1/10W
MAIN-P.W.Board		R3511	06E40828S01	RES,CF. 0-1/10W
MAIN-P.W.Board		R3512	06E40840S01	RES,CF. 10K-1/10W
MAIN-P.W.Board		R3514	06E40840S01	RES,CF. 10K-1/10W
MAIN-P.W.Board		R3515	06E40840S01	RES,CF. 10K-1/10W
MAIN-P.W.Board		R3516	06E40835S01	RES,CF. 1.5K-1/10W
MAIN-P.W.Board		R3517	06E40838S01	RES,CF. 4.7K-1/10W
MAIN-P.W.Board		R3518	06E40840S01	RES,CF. 10K-1/10W
MAIN-P.W.Board		R3519	06E40840S01	RES,CF. 10K-1/10W
MAIN-P.W.Board		R3520	06E40840S01	RES,CF. 10K-1/10W
MAIN-P.W.Board		R3521	06E40840S01	RES,CF. 10K-1/10W

MAIN-P.W.Board		R3523	06E40828S01	RES,CF. 0-1/10W
MAIN-P.W.Board		R3527	06E42274S01	RES,CF. 100-1/10W
MAIN-P.W.Board		R3528	06E42274S01	RES,CF. 100-1/10W
MAIN-P.W.Board		R3529	06E42274S01	RES,CF. 100-1/10W
MAIN-P.W.Board		R4001	06E42406S01	RES,CF. 22K-1/16W
MAIN-P.W.Board		R4002	06E42406S01	RES,CF. 22K-1/16W
MAIN-P.W.Board		R4003	06E42406S01	RES,CF. 22K-1/16W
MAIN-P.W.Board		R4004	06E42405S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R4005	06E42405S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R4006	06E42405S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R4007	06E42406S01	RES,CF. 22K-1/16W
MAIN-P.W.Board		R4008	06E42406S01	RES,CF. 22K-1/16W
MAIN-P.W.Board		R4009	06E42406S01	RES,CF. 22K-1/16W
MAIN-P.W.Board		R4010	06E42405S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R4011	06E42405S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R4012	06E42405S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R4013	06E42405S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R4014	06E42406S01	RES,CF. 22K-1/16W
MAIN-P.W.Board		R4015	06E42406S01	RES,CF. 22K-1/16W
MAIN-P.W.Board		R4016	06E42406S01	RES,CF. 22K-1/16W
MAIN-P.W.Board		R4017	06E42406S01	RES,CF. 22K-1/16W
MAIN-P.W.Board		R4018	06E42405S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R4019	06E42405S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R4020	06E42405S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R4021	06E42405S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R4022	06E42406S01	RES,CF. 22K-1/16W
MAIN-P.W.Board		R4023	06E42311S01	RES,SOUND. 100K-1/10W
MAIN-P.W.Board		R4024	06E42311S01	RES,SOUND. 100K-1/10W
MAIN-P.W.Board		R4025	06E42311S01	RES,SOUND. 100K-1/10W
MAIN-P.W.Board		R4026	06E42314S01	RES,SOUND. 3.9K-1/4W
MAIN-P.W.Board		R4027	06E42314S01	RES,SOUND. 3.9K-1/4W
MAIN-P.W.Board		R4028	06E42314S01	RES,SOUND. 3.9K-1/4W
MAIN-P.W.Board		R4029	06E42314S01	RES,SOUND. 3.9K-1/4W
MAIN-P.W.Board		R4030	06E42314S01	RES,SOUND. 3.9K-1/4W
MAIN-P.W.Board		R4031	06E42314S01	RES,SOUND. 3.9K-1/4W
MAIN-P.W.Board		R4032	06E42314S01	RES,SOUND. 3.9K-1/4W
MAIN-P.W.Board		R4033	06E42314S01	RES,SOUND. 3.9K-1/4W
MAIN-P.W.Board		R4034	06E42314S01	RES,SOUND. 3.9K-1/4W
MAIN-P.W.Board		R4035	06E42314S01	RES,SOUND. 3.9K-1/4W
MAIN-P.W.Board		R4036	06E42410S01	RES,SOUND. 10K-1/10W
MAIN-P.W.Board		R4037	06E42405S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R4038	06E42310S01	RES,SOUND. 27K-1/10W
MAIN-P.W.Board		R4039	06E42411S01	RES,SOUND. 220K-1/10W
MAIN-P.W.Board		R4040	06E42410S01	RES,SOUND. 10K-1/10W
MAIN-P.W.Board		R4041	06E42411S01	RES,SOUND. 220K-1/10W
MAIN-P.W.Board		R4042	06E42314S01	RES,SOUND. 3.9K-1/4W
MAIN-P.W.Board		R4043	06E42406S01	RES,CF. 22K-1/16W
MAIN-P.W.Board		R4044	06E42314S01	RES,SOUND. 3.9K-1/4W
MAIN-P.W.Board		R4045	06E42410S01	RES,SOUND. 10K-1/10W
MAIN-P.W.Board		R4046	06E42310S01	RES,SOUND. 27K-1/10W
MAIN-P.W.Board		R4047	06E42411S01	RES,SOUND. 220K-1/10W
MAIN-P.W.Board		R4048	06E42410S01	RES,SOUND. 10K-1/10W
MAIN-P.W.Board		R4049	06E42414S01	RES,SOUND. 1.2K-1/10W
MAIN-P.W.Board		R4050	06E42414S01	RES,SOUND. 1.2K-1/10W

MAIN-P.W.Board		R4051	06E42411S01	RES,SOUND. 220K-1/10W
MAIN-P.W.Board		R4052	06E42414S01	RES,SOUND. 1.2K-1/10W
MAIN-P.W.Board		R4053	06E42414S01	RES,SOUND. 1.2K-1/10W
MAIN-P.W.Board		R4054	06E42410S01	RES,SOUND. 10K-1/10W
MAIN-P.W.Board		R4055	06E42414S01	RES,SOUND. 1.2K-1/10W
MAIN-P.W.Board		R4056	06E42414S01	RES,SOUND. 1.2K-1/10W
MAIN-P.W.Board		R4057	06E42310S01	RES,SOUND. 27K-1/10W
MAIN-P.W.Board		R4058	06E42414S01	RES,SOUND. 1.2K-1/10W
MAIN-P.W.Board		R4059	06E42414S01	RES,SOUND. 1.2K-1/10W
MAIN-P.W.Board		R4060	06E42410S01	RES,SOUND. 10K-1/10W
MAIN-P.W.Board		R4061	06E42310S01	RES,SOUND. 27K-1/10W
MAIN-P.W.Board		R4062	06E42410S01	RES,SOUND. 10K-1/10W
MAIN-P.W.Board		R4063	06E42411S01	RES,SOUND. 220K-1/10W
MAIN-P.W.Board		R4064	06E42310S01	RES,SOUND. 27K-1/10W
MAIN-P.W.Board		R4065	06E42410S01	RES,SOUND. 10K-1/10W
MAIN-P.W.Board		R4066	06E42411S01	RES,SOUND. 220K-1/10W
MAIN-P.W.Board		R4067	06E42410S01	RES,SOUND. 10K-1/10W
MAIN-P.W.Board		R4068	06E42411S01	RES,SOUND. 220K-1/10W
MAIN-P.W.Board		R4069	06E42414S01	RES,SOUND. 1.2K-1/10W
MAIN-P.W.Board		R4070	06E42414S01	RES,SOUND. 1.2K-1/10W
MAIN-P.W.Board		R4071	06E42411S01	RES,SOUND. 220K-1/10W
MAIN-P.W.Board		R4072	06E42414S01	RES,SOUND. 1.2K-1/10W
MAIN-P.W.Board		R4073	06E42414S01	RES,SOUND. 1.2K-1/10W
MAIN-P.W.Board		R4074	06E42411S01	RES,SOUND. 220K-1/10W
MAIN-P.W.Board		R4075	06E42410S01	RES,SOUND. 10K-1/10W
MAIN-P.W.Board		R4076	06E42411S01	RES,SOUND. 220K-1/10W
MAIN-P.W.Board		R4077	06E42410S01	RES,SOUND. 10K-1/10W
MAIN-P.W.Board		R4078	06E42310S01	RES,SOUND. 27K-1/10W
MAIN-P.W.Board		R4079	06E42411S01	RES,SOUND. 220K-1/10W
MAIN-P.W.Board		R4080	06E42410S01	RES,SOUND. 10K-1/10W
MAIN-P.W.Board		R4081	06E42411S01	RES,SOUND. 220K-1/10W
MAIN-P.W.Board		R4082	06E42227S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board		R4083	06E42227S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board		R4084	06E42227S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board		R4085	06E42227S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board		R4086	06E42227S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board		R4087	06E42227S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board		R4088	06E42227S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board		R4089	06E42227S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board		R4090	06E42227S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board		R4091	06E42227S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board		R4092	06E42227S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board		R4093	06E42227S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board		R5001	06E42409S01	RES,SOUND. 5.6K-1/10W
MAIN-P.W.Board		R5002	06E42409S01	RES,SOUND. 5.6K-1/10W
MAIN-P.W.Board		R5003	06E42307S01	RES,SOUND. 1.5K-1/10W
MAIN-P.W.Board		R5004	06E42307S01	RES,SOUND. 1.5K-1/10W
MAIN-P.W.Board		R5005	06E42315S01	RES,SOUND. 91-1/10W
MAIN-P.W.Board		R5006	06E42316S01	RES,SOUND. 1.1K-1/10W
MAIN-P.W.Board		R5007	06E42307S01	RES,SOUND. 1.5K-1/10W
MAIN-P.W.Board		R5008	06E42316S01	RES,SOUND. 1.1K-1/10W
MAIN-P.W.Board		R5009	06E42311S01	RES,SOUND. 100K-1/10W
MAIN-P.W.Board		R5010	06E42315S01	RES,SOUND. 91-1/10W
MAIN-P.W.Board		R5011	06E42316S01	RES,SOUND. 1.1K-1/10W

MAIN-P.W.Board		R5012	06E42307S01	RES,SOUND. 1.5K-1/10W
MAIN-P.W.Board		R5013	06E42307S01	RES,SOUND. 1.5K-1/10W
MAIN-P.W.Board		R5014	06E42315S01	RES,SOUND. 91-1/10W
MAIN-P.W.Board		R5015	06E42316S01	RES,SOUND. 1.1K-1/10W
MAIN-P.W.Board		R5016	06E42307S01	RES,SOUND. 1.5K-1/10W
MAIN-P.W.Board		R5017	06E42316S01	RES,SOUND. 1.1K-1/10W
MAIN-P.W.Board		R5018	06E42311S01	RES,SOUND. 100K-1/10W
MAIN-P.W.Board		R5019	06E42315S01	RES,SOUND. 91-1/10W
MAIN-P.W.Board		R5020	06E42316S01	RES,SOUND. 1.1K-1/10W
MAIN-P.W.Board		R5021	06E42409S01	RES,SOUND. 5.6K-1/10W
MAIN-P.W.Board		R5022	06E42409S01	RES,SOUND. 5.6K-1/10W
MAIN-P.W.Board		R5023	06E42307S01	RES,SOUND. 1.5K-1/10W
MAIN-P.W.Board		R5024	06E42307S01	RES,SOUND. 1.5K-1/10W
MAIN-P.W.Board		R5025	06E42315S01	RES,SOUND. 91-1/10W
MAIN-P.W.Board		R5026	06E42316S01	RES,SOUND. 1.1K-1/10W
MAIN-P.W.Board		R5027	06E42307S01	RES,SOUND. 1.5K-1/10W
MAIN-P.W.Board		R5028	06E42316S01	RES,SOUND. 1.1K-1/10W
MAIN-P.W.Board		R5029	06E42311S01	RES,SOUND. 100K-1/10W
MAIN-P.W.Board		R5030	06E42315S01	RES,SOUND. 91-1/10W
MAIN-P.W.Board		R5031	06E42316S01	RES,SOUND. 1.1K-1/10W
MAIN-P.W.Board		R5032	06E42307S01	RES,SOUND. 1.5K-1/10W
MAIN-P.W.Board		R5033	06E42307S01	RES,SOUND. 1.5K-1/10W
MAIN-P.W.Board		R5034	06E42315S01	RES,SOUND. 91-1/10W
MAIN-P.W.Board		R5035	06E42316S01	RES,SOUND. 1.1K-1/10W
MAIN-P.W.Board		R5036	06E42307S01	RES,SOUND. 1.5K-1/10W
MAIN-P.W.Board		R5037	06E42316S01	RES,SOUND. 1.1K-1/10W
MAIN-P.W.Board		R5038	06E42311S01	RES,SOUND. 100K-1/10W
MAIN-P.W.Board		R5039	06E42315S01	RES,SOUND. 91-1/10W
MAIN-P.W.Board		R5040	06E42316S01	RES,SOUND. 1.1K-1/10W
MAIN-P.W.Board		R5041	06E42409S01	RES,SOUND. 5.6K-1/10W
MAIN-P.W.Board		R5042	06E42409S01	RES,SOUND. 5.6K-1/10W
MAIN-P.W.Board		R5043	06E42307S01	RES,SOUND. 1.5K-1/10W
MAIN-P.W.Board		R5044	06E42307S01	RES,SOUND. 1.5K-1/10W
MAIN-P.W.Board		R5045	06E42315S01	RES,SOUND. 91-1/10W
MAIN-P.W.Board		R5046	06E42316S01	RES,SOUND. 1.1K-1/10W
MAIN-P.W.Board		R5047	06E42307S01	RES,SOUND. 1.5K-1/10W
MAIN-P.W.Board		R5048	06E42316S01	RES,SOUND. 1.1K-1/10W
MAIN-P.W.Board		R5049	06E42311S01	RES,SOUND. 100K-1/10W
MAIN-P.W.Board		R5050	06E42315S01	RES,SOUND. 91-1/10W
MAIN-P.W.Board		R5051	06E42316S01	RES,SOUND. 1.1K-1/10W
MAIN-P.W.Board		R5052	06E42307S01	RES,SOUND. 1.5K-1/10W
MAIN-P.W.Board		R5053	06E42307S01	RES,SOUND. 1.5K-1/10W
MAIN-P.W.Board		R5054	06E42315S01	RES,SOUND. 91-1/10W
MAIN-P.W.Board		R5055	06E42316S01	RES,SOUND. 1.1K-1/10W
MAIN-P.W.Board		R5056	06E42307S01	RES,SOUND. 1.5K-1/10W
MAIN-P.W.Board		R5057	06E42316S01	RES,SOUND. 1.1K-1/10W
MAIN-P.W.Board		R5058	06E42311S01	RES,SOUND. 100K-1/10W
MAIN-P.W.Board		R5059	06E42315S01	RES,SOUND. 91-1/10W
MAIN-P.W.Board		R5060	06E42316S01	RES,SOUND. 1.1K-1/10W
MAIN-P.W.Board		R5061	06E42293S01	RES,CF. 100-1/16W
MAIN-P.W.Board		R5062	06E42293S01	RES,CF. 100-1/16W
MAIN-P.W.Board		R5063	06E40828S01	RES,CF. 0-1/10W
MAIN-P.W.Board		R5065	06E40883S01	RES,CF. 33-1/10W
MAIN-P.W.Board		R5066	06E42292S01	RES,CF. 33-1/16W

MAIN-P.W.Board		R5067	06E42292S01	RES,CF. 33-1/16W
MAIN-P.W.Board		R5068	06E42292S01	RES,CF. 33-1/16W
MAIN-P.W.Board		R5069	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R5070	06E42293S01	RES,CF. 100-1/16W
MAIN-P.W.Board		R5071	06E42293S01	RES,CF. 100-1/16W
MAIN-P.W.Board		R5072	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R5073	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R5074	06E42292S01	RES,CF. 33-1/16W
MAIN-P.W.Board		R5075	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R5076	06E42409S01	RES,SOUND. 5.6K-1/10W
MAIN-P.W.Board		R5077	06E42409S01	RES,SOUND. 5.6K-1/10W
MAIN-P.W.Board		R5078	06E42409S01	RES,SOUND. 5.6K-1/10W
MAIN-P.W.Board		R5079	06E42409S01	RES,SOUND. 5.6K-1/10W
MAIN-P.W.Board		R5080	06E42409S01	RES,SOUND. 5.6K-1/10W
MAIN-P.W.Board		R5081	06E42409S01	RES,SOUND. 5.6K-1/10W
MAIN-P.W.Board		R5501	06E42295S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R5502	06E42295S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R5503	06E40738S01	RES,CF. 3.3K-1/16W
MAIN-P.W.Board		R5504	06E42295S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R5505	06E42295S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R5506	06E42295S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R5507	06E40738S01	RES,CF. 3.3K-1/16W
MAIN-P.W.Board		R5508	06E42295S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R5509	06E42295S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R5510	06E42295S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R5511	06E40883S01	RES,CF. 33-1/10W
MAIN-P.W.Board		R5512	06E42295S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R5513	06E42295S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R5514	06E42295S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R5515	06E40738S01	RES,CF. 3.3K-1/16W
MAIN-P.W.Board		R5516	06E42295S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R5517	06E42295S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R5518	06E42295S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R5519	06E42295S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R5520	06E40883S01	RES,CF. 33-1/10W
MAIN-P.W.Board		R5521	06E42274S01	RES,CF. 100-1/10W
MAIN-P.W.Board		R5522	06E40829S01	RES,CF. 47K-1/10W
MAIN-P.W.Board		R5523	06E40312S01	RES,CF. 470-1/10W
MAIN-P.W.Board		R5524	06E42301S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board		R5525	06E42295S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R5526	06E40824S01	RES,CF. 2.2K-1/10W
MAIN-P.W.Board		R5527	06E42276S01	RES,CF. 47R-1/16W
MAIN-P.W.Board		R5528	06E42298S01	RES,CF. 10K-1/10W
MAIN-P.W.Board		R5529	06E40845S01	RES,CF. 22K-1/10W
MAIN-P.W.Board		R5530	06E42295S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R5531	06E42300S01	RES,CF. 330-1/16W
MAIN-P.W.Board		R5532	06E42284S01	RES,CF. 22K-1/16W
MAIN-P.W.Board		R5533	06E42284S01	RES,CF. 22K-1/16W
MAIN-P.W.Board		R5534	06E42276S01	RES,CF. 47R-1/16W
MAIN-P.W.Board		R5535	06E40884S01	RES,CF. 120-1/10W
MAIN-P.W.Board		R5536	06E40884S01	RES,CF. 120-1/10W
MAIN-P.W.Board		R5537	06E40884S01	RES,CF. 120-1/10W
MAIN-P.W.Board		R5538	06E40884S01	RES,CF. 120-1/10W
MAIN-P.W.Board		R5539	06E40884S01	RES,CF. 120-1/10W

MAIN-P.W.Board		R5540	06E40884S01	RES,CF. 120-1/10W
MAIN-P.W.Board		R5541	06E40884S01	RES,CF. 120-1/10W
MAIN-P.W.Board		R5542	06E40884S01	RES,CF. 120-1/10W
MAIN-P.W.Board		R5543	06E40884S01	RES,CF. 120-1/10W
MAIN-P.W.Board		R5544	06E40884S01	RES,CF. 120-1/10W
MAIN-P.W.Board		R5545	06E40884S01	RES,CF. 120-1/10W
MAIN-P.W.Board		R5546	06E40884S01	RES,CF. 120-1/10W
MAIN-P.W.Board		R5547	06E40829S01	RES,CF. 47K-1/10W
MAIN-P.W.Board		R5548	06E40829S01	RES,CF. 47K-1/10W
MAIN-P.W.Board		R5549	06E40883S01	RES,CF. 33-1/10W
MAIN-P.W.Board		R5550	06E42301S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board		R5551	06E40319S01	RES,CF. 6.2K-1/16W
MAIN-P.W.Board		R5552	06E40845S01	RES,CF. 22K-1/10W
MAIN-P.W.Board		R5553	06E42296S01	RES,CF. 47K-1/16W
MAIN-P.W.Board		R5554	06E42296S01	RES,CF. 47K-1/16W
MAIN-P.W.Board		R5555	06E42296S01	RES,CF. 47K-1/16W
MAIN-P.W.Board		R5558	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R5559	06E42285S01	RES,CF. 24K-1/16W
MAIN-P.W.Board		R6001	06E42293S01	RES,CF. 100-1/16W
MAIN-P.W.Board		R6002	06E42293S01	RES,CF. 100-1/16W
MAIN-P.W.Board		R6007	06E40989S01	RES,CF. 47-1/16W
MAIN-P.W.Board		R6008	06E42276S01	RES,CF. 47R-1/16W
MAIN-P.W.Board		R6009	06E40989S01	RES,CF. 47-1/16W
MAIN-P.W.Board		R6010	06E42276S01	RES,CF. 47R-1/16W
MAIN-P.W.Board		R6011	06E40989S01	RES,CF. 47-1/16W
MAIN-P.W.Board		R6012	06E42276S01	RES,CF. 47R-1/16W
MAIN-P.W.Board		R6025	06E42309S01	RES,SOUND. 22K-1/10W
MAIN-P.W.Board		R6026	06E42412S01	RES,SOUND. 2.2K-1/10W
MAIN-P.W.Board		R6027	06E42408S01	RES,SOUND. 47-1/10W
MAIN-P.W.Board		R6028	06E42413S01	RES,SOUND. 12K-1/10W
MAIN-P.W.Board		R6029	06E42412S01	RES,SOUND. 2.2K-1/10W
MAIN-P.W.Board		R6030	06E42413S01	RES,SOUND. 12K-1/10W
MAIN-P.W.Board		R6031	06E42309S01	RES,SOUND. 22K-1/10W
MAIN-P.W.Board		R6032	06E42413S01	RES,SOUND. 12K-1/10W
MAIN-P.W.Board		R6033	06E42413S01	RES,SOUND. 12K-1/10W
MAIN-P.W.Board		R6034	06E42309S01	RES,SOUND. 22K-1/10W
MAIN-P.W.Board		R6035	06E42412S01	RES,SOUND. 2.2K-1/10W
MAIN-P.W.Board		R6036	06E42412S01	RES,SOUND. 2.2K-1/10W
MAIN-P.W.Board		R6037	06E42309S01	RES,SOUND. 22K-1/10W
MAIN-P.W.Board		R6038	06E42408S01	RES,SOUND. 47-1/10W
MAIN-P.W.Board		R6039	06E42309S01	RES,SOUND. 22K-1/10W
MAIN-P.W.Board		R6040	06E42412S01	RES,SOUND. 2.2K-1/10W
MAIN-P.W.Board		R6041	06E42408S01	RES,SOUND. 47-1/10W
MAIN-P.W.Board		R6042	06E42413S01	RES,SOUND. 12K-1/10W
MAIN-P.W.Board		R6043	06E42412S01	RES,SOUND. 2.2K-1/10W
MAIN-P.W.Board		R6044	06E42413S01	RES,SOUND. 12K-1/10W
MAIN-P.W.Board		R6045	06E42309S01	RES,SOUND. 22K-1/10W
MAIN-P.W.Board		R6046	06E42413S01	RES,SOUND. 12K-1/10W
MAIN-P.W.Board		R6047	06E42413S01	RES,SOUND. 12K-1/10W
MAIN-P.W.Board		R6048	06E42309S01	RES,SOUND. 22K-1/10W
MAIN-P.W.Board		R6049	06E42412S01	RES,SOUND. 2.2K-1/10W
MAIN-P.W.Board		R6050	06E42412S01	RES,SOUND. 2.2K-1/10W
MAIN-P.W.Board		R6051	06E42309S01	RES,SOUND. 22K-1/10W
MAIN-P.W.Board		R6052	06E42408S01	RES,SOUND. 47-1/10W

MAIN-P.W.Board		R6053	06E42309S01	RES,SOUND. 22K-1/10W
MAIN-P.W.Board		R6054	06E42412S01	RES,SOUND. 2.2K-1/10W
MAIN-P.W.Board		R6055	06E42408S01	RES,SOUND. 47-1/10W
MAIN-P.W.Board		R6056	06E42413S01	RES,SOUND. 12K-1/10W
MAIN-P.W.Board		R6057	06E42412S01	RES,SOUND. 2.2K-1/10W
MAIN-P.W.Board		R6058	06E42413S01	RES,SOUND. 12K-1/10W
MAIN-P.W.Board		R6059	06E42309S01	RES,SOUND. 22K-1/10W
MAIN-P.W.Board		R6060	06E42413S01	RES,SOUND. 12K-1/10W
MAIN-P.W.Board		R6061	06E42413S01	RES,SOUND. 12K-1/10W
MAIN-P.W.Board		R6062	06E42309S01	RES,SOUND. 22K-1/10W
MAIN-P.W.Board		R6063	06E42412S01	RES,SOUND. 2.2K-1/10W
MAIN-P.W.Board		R6064	06E42412S01	RES,SOUND. 2.2K-1/10W
MAIN-P.W.Board		R6065	06E42309S01	RES,SOUND. 22K-1/10W
MAIN-P.W.Board		R6066	06E42408S01	RES,SOUND. 47-1/10W
MAIN-P.W.Board		R6067	06E42309S01	RES,SOUND. 22K-1/10W
MAIN-P.W.Board		R6068	06E42412S01	RES,SOUND. 2.2K-1/10W
MAIN-P.W.Board		R6069	06E42408S01	RES,SOUND. 47-1/10W
MAIN-P.W.Board		R6070	06E42413S01	RES,SOUND. 12K-1/10W
MAIN-P.W.Board		R6071	06E42412S01	RES,SOUND. 2.2K-1/10W
MAIN-P.W.Board		R6072	06E42413S01	RES,SOUND. 12K-1/10W
MAIN-P.W.Board		R6073	06E42309S01	RES,SOUND. 22K-1/10W
MAIN-P.W.Board		R6074	06E42413S01	RES,SOUND. 12K-1/10W
MAIN-P.W.Board		R6075	06E42413S01	RES,SOUND. 12K-1/10W
MAIN-P.W.Board		R6076	06E42309S01	RES,SOUND. 22K-1/10W
MAIN-P.W.Board		R6077	06E42412S01	RES,SOUND. 2.2K-1/10W
MAIN-P.W.Board		R6078	06E42412S01	RES,SOUND. 2.2K-1/10W
MAIN-P.W.Board		R6079	06E42309S01	RES,SOUND. 22K-1/10W
MAIN-P.W.Board		R6080	06E42408S01	RES,SOUND. 47-1/10W
MAIN-P.W.Board		R6083	06E40828S01	RES,CF. 0-1/10W
MAIN-P.W.Board		R6084	06E40883S01	RES,CF. 33-1/10W
MAIN-P.W.Board		R6085	06E42276S01	RES,CF. 47R-1/16W
MAIN-P.W.Board		R6086	06E42276S01	RES,CF. 47R-1/16W
MAIN-P.W.Board		R6501	06E42293S01	RES,CF. 100-1/16W
MAIN-P.W.Board		R6502	06E42293S01	RES,CF. 100-1/16W
MAIN-P.W.Board		R6503	06E42294S01	RES,CF. 2.2K-1/16W
MAIN-P.W.Board		R6504	06E42294S01	RES,CF. 2.2K-1/16W
MAIN-P.W.Board		R6505	06E42415S01	RES,SOUND. 18K-1/10W
MAIN-P.W.Board		R6506	06E42309S01	RES,SOUND. 22K-1/10W
MAIN-P.W.Board		R6507	06E42412S01	RES,SOUND. 2.2K-1/10W
MAIN-P.W.Board		R6508	06E42317S01	RES,SOUND. 51K-1/10W
MAIN-P.W.Board		R6509	06E42312S01	RES,SOUND. 100-1/4W
MAIN-P.W.Board		R6510	06E42412S01	RES,SOUND. 2.2K-1/10W
MAIN-P.W.Board		R6511	06E42415S01	RES,SOUND. 18K-1/10W
MAIN-P.W.Board		R6512	06E42309S01	RES,SOUND. 22K-1/10W
MAIN-P.W.Board		R6513	06E42412S01	RES,SOUND. 2.2K-1/10W
MAIN-P.W.Board		R6516	06E42412S01	RES,SOUND. 2.2K-1/10W
MAIN-P.W.Board		R6517	06E42415S01	RES,SOUND. 18K-1/10W
MAIN-P.W.Board		R6518	06E42309S01	RES,SOUND. 22K-1/10W
MAIN-P.W.Board		R6519	06E42415S01	RES,SOUND. 18K-1/10W
MAIN-P.W.Board		R6520	06E42309S01	RES,SOUND. 22K-1/10W
MAIN-P.W.Board		R6521	06E42412S01	RES,SOUND. 2.2K-1/10W
MAIN-P.W.Board		R6524	06E42412S01	RES,SOUND. 2.2K-1/10W
MAIN-P.W.Board		R6525	06E42415S01	RES,SOUND. 18K-1/10W
MAIN-P.W.Board		R6526	06E42309S01	RES,SOUND. 22K-1/10W

MAIN-P.W.Board		R6527	06E42415S01	RES,SOUND. 18K-1/10W
MAIN-P.W.Board		R6528	06E42309S01	RES,SOUND. 22K-1/10W
MAIN-P.W.Board		R6529	06E42412S01	RES,SOUND. 2.2K-1/10W
MAIN-P.W.Board		R6532	06E42412S01	RES,SOUND. 2.2K-1/10W
MAIN-P.W.Board		R6533	06E42415S01	RES,SOUND. 18K-1/10W
MAIN-P.W.Board		R6534	06E42309S01	RES,SOUND. 22K-1/10W
MAIN-P.W.Board		R6535	06E42313S01	RES,SOUND. 220-1/4W
MAIN-P.W.Board		R6536	06E42317S01	RES,SOUND. 51K-1/10W
MAIN-P.W.Board		R6537	06E42312S01	RES,SOUND. 100-1/4W
MAIN-P.W.Board		R6538	06E42313S01	RES,SOUND. 220-1/4W
MAIN-P.W.Board		R6539	06E42312S01	RES,SOUND. 100-1/4W
MAIN-P.W.Board		R6540	06E42313S01	RES,SOUND. 220-1/4W
MAIN-P.W.Board		R6541	06E42317S01	RES,SOUND. 51K-1/10W
MAIN-P.W.Board		R6542	06E42317S01	RES,SOUND. 51K-1/10W
MAIN-P.W.Board		R6543	06E42312S01	RES,SOUND. 100-1/4W
MAIN-P.W.Board		R6544	06E42313S01	RES,SOUND. 220-1/4W
MAIN-P.W.Board		R6545	06E42312S01	RES,SOUND. 100-1/4W
MAIN-P.W.Board		R6546	06E42313S01	RES,SOUND. 220-1/4W
MAIN-P.W.Board		R6547	06E42317S01	RES,SOUND. 51K-1/10W
MAIN-P.W.Board		R6548	06E42317S01	RES,SOUND. 51K-1/10W
MAIN-P.W.Board		R6549	06E42312S01	RES,SOUND. 100-1/4W
MAIN-P.W.Board		R6550	06E42313S01	RES,SOUND. 220-1/4W
MAIN-P.W.Board		R6551	06E42312S01	RES,SOUND. 100-1/4W
MAIN-P.W.Board		R6552	06E42313S01	RES,SOUND. 220-1/4W
MAIN-P.W.Board		R6553	06E42317S01	RES,SOUND. 51K-1/10W
MAIN-P.W.Board		R6554	06E42311S01	RES,SOUND. 100K-1/10W
MAIN-P.W.Board		R6555	06E42415S01	RES,SOUND. 18K-1/10W
MAIN-P.W.Board		R6556	06E42309S01	RES,SOUND. 22K-1/10W
MAIN-P.W.Board		R6557	06E42312S01	RES,SOUND. 100-1/4W
MAIN-P.W.Board		R6558	06E42313S01	RES,SOUND. 220-1/4W
MAIN-P.W.Board		R6559	06E42317S01	RES,SOUND. 51K-1/10W
MAIN-P.W.Board		R6560	06E42296S01	RES,CF. 47K-1/16W
MAIN-P.W.Board		R6561	06E42296S01	RES,CF. 47K-1/16W
MAIN-P.W.Board		R6562	06E42227S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board		R6563	06E42227S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board		R6564	06E42227S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board		R6565	06E42227S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board		R6566	06E42227S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board		R6567	06E42227S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board		R6568	06E42227S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board		R6569	06E42227S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board		R7001	06E42292S01	RES,CF. 33-1/16W
MAIN-P.W.Board		R7002	06E42292S01	RES,CF. 33-1/16W
MAIN-P.W.Board		R7003	06E42292S01	RES,CF. 33-1/16W
MAIN-P.W.Board		R7004	06E40828S01	RES,CF. 0-1/10W
MAIN-P.W.Board		R7005	06E41373S01	RES,CF. 100-1/16W
MAIN-P.W.Board		R7006	06E42404S01	RES,CF. 12K-1/16W
MAIN-P.W.Board		R7007	06E42292S01	RES,CF. 33-1/16W
MAIN-P.W.Board		R7008	06E42292S01	RES,CF. 33-1/16W
MAIN-P.W.Board		R7009	06E42292S01	RES,CF. 33-1/16W
MAIN-P.W.Board		R7010	06E42292S01	RES,CF. 33-1/16W
MAIN-P.W.Board		R7011	06E41373S01	RES,CF. 100-1/16W
MAIN-P.W.Board		R7012	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R7013	06E42287S01	RES,CF. 47K-1/16W

MAIN-P.W.Board		R7014	06E42287S01	RES,CF. 47K-1/16W
MAIN-P.W.Board		R7015	06E36589S01	RES,CF. 47-1/16W
MAIN-P.W.Board		R7016	06E36589S01	RES,CF. 47-1/16W
MAIN-P.W.Board		R7017	06E42287S01	RES,CF. 47K-1/16W
MAIN-P.W.Board		R7018	06E42287S01	RES,CF. 47K-1/16W
MAIN-P.W.Board		R7019	06E42287S01	RES,CF. 47K-1/16W
MAIN-P.W.Board		R7020	06E42292S01	RES,CF. 33-1/16W
MAIN-P.W.Board		R7021	06E40829S01	RES,CF. 47K-1/10W
MAIN-P.W.Board		R7022	06E40829S01	RES,CF. 47K-1/10W
MAIN-P.W.Board		R7023	06E40829S01	RES,CF. 47K-1/10W
MAIN-P.W.Board		R7024	06E40840S01	RES,CF. 10K-1/10W
MAIN-P.W.Board		R7026	06E40829S01	RES,CF. 47K-1/10W
MAIN-P.W.Board		R7027	06E40883S01	RES,CF. 33-1/10W
MAIN-P.W.Board		R7028	06E40883S01	RES,CF. 33-1/10W
MAIN-P.W.Board		R7029	06E40830S01	RES,CF. 10-1/10W
MAIN-P.W.Board		R7030	06E40883S01	RES,CF. 33-1/10W
MAIN-P.W.Board		R7031	06E42384S01	RES,CF. 2.2K-1/16W
MAIN-P.W.Board		R8001	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R8002	06E40834S01	RES,CF. 1K-1/10W
MAIN-P.W.Board		R8003	06E42295S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R8004	06E42299S01	RES,CF. 1K-1/16W
MAIN-P.W.Board		R8005	06E42278S01	RES,CF. 33K-1/16W
MAIN-P.W.Board		R8006	06E42281S01	RES,CF. 68K-1/16W
MAIN-P.W.Board		R8007	06E40828S01	RES,CF. 0-1/10W
MAIN-P.W.Board		R8008	06E40828S01	RES,CF. 0-1/10W
MAIN-P.W.Board		R8010	06E40829S01	RES,CF. 47K-1/10W
MAIN-P.W.Board		R8011	06E42396S01	RES,CF. 15K-1/16W
MAIN-P.W.Board		R8012	06E40829S01	RES,CF. 47K-1/10W
MAIN-P.W.Board		R8013	06E42291S01	RES,CF. 330K-1/16W
MAIN-P.W.Board		R8014	06E42291S01	RES,CF. 330K-1/16W
MAIN-P.W.Board		R8015	06E40823S01	RES,CF. 390-1/10W
MAIN-P.W.Board		R8016	06E40845S01	RES,CF. 22K-1/10W
MAIN-P.W.Board		R8017	06E40318S01	RES,CF. 5.6K-1/10W
MAIN-P.W.Board		R8018	06E40843S01	RES,CF. 150K-1/10W
MAIN-P.W.Board		R8019	06E40840S01	RES,CF. 10K-1/10W
MAIN-P.W.Board		R8020	06E40834S01	RES,CF. 1K-1/10W
MAIN-P.W.Board		R8021	06E42295S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R8022	06E42278S01	RES,CF. 33K-1/16W
MAIN-P.W.Board		R8030	06E40829S01	RES,CF. 47K-1/10W
MAIN-P.W.Board		R8032	06E42287S01	RES,CF. 47K-1/16W
MAIN-P.W.Board		R8033	06E35291S01	RES,CF. 6.8K-1/16W
MAIN-P.W.Board		R8034	06E42387S01	RES,CF. 680-1/16W
MAIN-P.W.Board		R8035	06E42390S01	RES,CF. 56K-1/16W
MAIN-P.W.Board		R8036	06E42295S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R8037	06E42295S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R8038	06E42295S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R8039	06E42295S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R8040	06E42302S01	RES,CF. 1-1/16W
MAIN-P.W.Board		R8041	06E42391S01	RES,CF. 100K-1/16W
MAIN-P.W.Board		R8042	06E42295S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R8043	06E42402S01	RES,CF. 1K-1/16W
MAIN-P.W.Board		R8044	06E40319S01	RES,CF. 6.2K-1/16W
MAIN-P.W.Board		R8045	06E42391S01	RES,CF. 100K-1/16W
MAIN-P.W.Board		R8046	06E40747S01	RES,CF. 91K-1/16W

MAIN-P.W.Board		R8049	06E35400S01	RES,CF. 5.1K-1/16W
MAIN-P.W.Board		R8050	06E40746S01	RES,CF. 75K-1/16W
MAIN-P.W.Board		R8058	06E36583S01	RES,CF. 0-1/4W
MAIN-P.W.Board		R8062	06E35405S01	RES,CF. 120K-1/16W
MAIN-P.W.Board		R8063	06E34814S01	RES,CF. 51K-1/16W
MAIN-P.W.Board		R8064	06E42273S01	RES,CF. 390K-1/16W
MAIN-P.W.Board		R8065	06E40746S01	RES,CF. 75K-1/16W
MAIN-P.W.Board		R8501	06E40841S01	RES,CF. 22K-1/10W
MAIN-P.W.Board		R8502	06E42400S01	RES,CF. 3.3K-1/4W
MAIN-P.W.Board		R8503	06E40319S01	RES,CF. 6.2K-1/16W
MAIN-P.W.Board		R8504	06E42400S01	RES,CF. 3.3K-1/4W
MAIN-P.W.Board		R8505	06E42400S01	RES,CF. 3.3K-1/4W
MAIN-P.W.Board		R8506	06E40829S01	RES,CF. 47K-1/10W
MAIN-P.W.Board		R8507	06E35365S01	RES,CF. 2.2K-1/4W
MAIN-P.W.Board		R8508	06E40322S01	RES,CF. 18K-1/16W
MAIN-P.W.Board		R8509	06E40322S01	RES,CF. 18K-1/16W
MAIN-P.W.Board		R8510	06E40747S01	RES,CF. 91K-1/16W
MAIN-P.W.Board		R8511	06E40841S01	RES,CF. 22K-1/10W
MAIN-P.W.Board		R8512	06E42400S01	RES,CF. 3.3K-1/4W
MAIN-P.W.Board		R8513	06E42400S01	RES,CF. 3.3K-1/4W
MAIN-P.W.Board		R8514	06E42400S01	RES,CF. 3.3K-1/4W
MAIN-P.W.Board		R8515	06E40830S01	RES,CF. 10-1/10W
MAIN-P.W.Board		R8516	06E40830S01	RES,CF. 10-1/10W
MAIN-P.W.Board		R8517	06E36460S01	RES,CF. 330-1/4W
MAIN-P.W.Board		R8518	06E36460S01	RES,CF. 330-1/4W
MAIN-P.W.Board		R8519	06E36460S01	RES,CF. 330-1/4W
MAIN-P.W.Board		R8520	06E36460S01	RES,CF. 330-1/4W
MAIN-P.W.Board		R8521	06E42284S01	RES,CF. 22K-1/16W
MAIN-P.W.Board		R8522	06E42298S01	RES,CF. 10K-1/10W
MAIN-P.W.Board		R8523	06E42298S01	RES,CF. 10K-1/10W
MAIN-P.W.Board		R8524	06E42298S01	RES,CF. 10K-1/10W
MAIN-P.W.Board		R8525	06E42298S01	RES,CF. 10K-1/10W
MAIN-P.W.Board		R8526	06E40325S01	RES,CF. 39K-1/16W
MAIN-P.W.Board		R8527	06E40325S01	RES,CF. 39K-1/16W
MAIN-P.W.Board		R8528	06E42289S01	RES,CF. 62K-1/16W
MAIN-P.W.Board		R8529	06E42289S01	RES,CF. 62K-1/16W
MAIN-P.W.Board		R8530	06E42297S01	RES,CF. 100K-1/10W
MAIN-P.W.Board		R8531	06E40826S01	RES,CF. 33K-1/10W
MAIN-P.W.Board		R8532	06E42309S01	RES,SOUND. 22K-1/10W
MAIN-P.W.Board		R8533	06E42308S01	RES,SOUND. 3.3K-1/10W
MAIN-P.W.Board		R8534	06E42275S01	RES,CF. 4.7K-1/10W
MAIN-P.W.Board		R8535	06E42275S01	RES,CF. 4.7K-1/10W
MAIN-P.W.Board		R8536	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R8538	06E40829S01	RES,CF. 47K-1/10W
MAIN-P.W.Board		R8539	06E40738S01	RES,CF. 3.3K-1/16W
MAIN-P.W.Board		R8540	06E42286S01	RES,CF. 39K-1/16W
MAIN-P.W.Board		R8541	06E42280S01	RES,CF. 1.8K-1/16W
MAIN-P.W.Board		R8542	06E35349S01	RES,CF. 1-1/4W
MAIN-P.W.Board		R8543	06E42278S01	RES,CF. 33K-1/16W
MAIN-P.W.Board		R8544	06E42299S01	RES,CF. 1K-1/16W
MAIN-P.W.Board		R8545	06E42295S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R8546	06E35349S01	RES,CF. 1-1/4W
MAIN-P.W.Board		R8547	06E35349S01	RES,CF. 1-1/4W
MAIN-P.W.Board		R8548	06E30006S01	RES,CF. 240-1/4W

MAIN-P.W.Board		R8549	06E35349S01	RES,CF. 1-1/4W
MAIN-P.W.Board		R8550	06E42389S01	RES,CF. 3.3K-1/16W
MAIN-P.W.Board		R8551	06E42279S01	RES,CF. 27K-1/16W
MAIN-P.W.Board		R8552	06E42388S01	RES,CF. 1.2K-1/16W
MAIN-P.W.Board		R8554	06E41379S01	RES,CF. 13K-1/16W
MAIN-P.W.Board		R8555	06E37204S01	RES,CF. 180-1/4W
MAIN-P.W.Board		R8556	06E31183S01	RES,CF. 22K-1/4W
MAIN-P.W.Board		R8557	06E35366S01	RES,CF. 4.7K-1/4W
MAIN-P.W.Board		R8558	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R8559	06E42407S01	RES,CF. 5.6-1/4W
MAIN-P.W.Board		R8560	06E42394S01	RES,CF. 8.2K-1/16W
MAIN-P.W.Board		R8561	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R8562	06E35365S01	RES,CF. 2.2K-1/4W
MAIN-P.W.Board		R8563	06E42296S01	RES,CF. 47K-1/16W
MAIN-P.W.Board		R8564	06E36124S01	RES,CF. 1.8K-1/4W
MAIN-P.W.Board		R8566	06E40829S01	RES,CF. 47K-1/10W
MAIN-P.W.Board		R8569	06E41386S01	RES,CF. 10K-1/4W
MAIN-P.W.Board		R8570	06E42306S01	RES,CF. 1.1K-1/4W
MAIN-P.W.Board		R8571	06E35358S01	RES,CF. 100-1/4W
MAIN-P.W.Board		R8572	06E42295S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R8573	06E42404S01	RES,CF. 12K-1/16W
MAIN-P.W.Board		R8574	06E42402S01	RES,CF. 1K-1/16W
MAIN-P.W.Board		R8577	06E42392S01	RES,CF. 150K-1/16W
MAIN-P.W.Board		R8578	06E42278S01	RES,CF. 33K-1/16W
MAIN-P.W.Board		R8579	06E42399S01	RES,CF. 390-1/16W
MAIN-P.W.Board		R8581	06E42303S01	RES,CF. 0.024-0.5W
MAIN-P.W.Board		R8582	06E42295S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R8583	06E35400S01	RES,CF. 5.1K-1/16W
MAIN-P.W.Board		R8584	06E42387S01	RES,CF. 680-1/16W
MAIN-P.W.Board		R8585	06E42278S01	RES,CF. 33K-1/16W
MAIN-P.W.Board		R8586	06E42393S01	RES,CF. 5.6K-1/16W
MAIN-P.W.Board		R8587	06E42397S01	RES,CF. 82-1/16W
MAIN-P.W.Board		R8588	06E42287S01	RES,CF. 47K-1/16W
MAIN-P.W.Board		R8590	06E40828S01	RES,CF. 0-1/10W
MAIN-P.W.Board		R8591	06E42383S01	RES,CF. 4.7K-1/10W
MAIN-P.W.Board		R8592	06E42404S01	RES,CF. 12K-1/16W
MAIN-P.W.Board		R8593	06E42403S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board		R8594	06E42277S01	RES,CF. 15K-1/16W
MAIN-P.W.Board		R8595	06E42227S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board		R8596	06E42283S01	RES,CF. 22K-1/16W
MAIN-P.W.Board		R8597	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R8598	06E42284S01	RES,CF. 22K-1/16W
MAIN-P.W.Board		R8599	06E42304S01	RES,CF. 82K-1/8W
MAIN-P.W.Board		R8600	06E42305S01	RES,CF. 33K-1/4W
MAIN-P.W.Board		R8601	06E40829S01	RES,CF. 47K-1/10W
MAIN-P.W.Board		R8602	06E42395S01	RES,CF. 12K-1/16W
MAIN-P.W.Board		R8603	06E36124S01	RES,CF. 1.8K-1/4W
MAIN-P.W.Board		R8604	06E40829S01	RES,CF. 47K-1/10W
MAIN-P.W.Board		R8605	06E40738S01	RES,CF. 3.3K-1/16W
MAIN-P.W.Board		R8606	06E42279S01	RES,CF. 27K-1/16W
MAIN-P.W.Board		R8607	06E42295S01	RES,CF. 10K-1/16W
MAIN-P.W.Board		R8610	06E35243S01	RES,CF. 7.5K-1/16W
MAIN-P.W.Board		RCA1	09E39714S01	RCA,JACK 2P-4P
MAIN-P.W.Board		RCA2	09E39714S01	RCA,JACK 2P-4P

MAIN-P.W.Board		RCA3	09E39714S01	RCA,JACK 2P-4P
MAIN-P.W.Board		RCA4	09E39714S01	RCA,JACK 2P-4P
MAIN-P.W.Board		RCA5	09E39714S01	RCA,JACK 2P-4P
MAIN-P.W.Board		RCA6	09E39714S01	RCA,JACK 2P-4P
MAIN-P.W.Board		RCA7	09E39714S01	RCA,JACK 2P-4P
MAIN-P.W.Board		SD8001	48E40860S01	DIO,SHOTTKY @RB160M
MAIN-P.W.Board		SD8002	48E40860S01	DIO,SHOTTKY @RB160M
MAIN-P.W.Board		SD8003	48E41050S01	DIODE,SHOTTKYRB050L-40
MAIN-P.W.Board		SD8501	48E40860S01	DIO,SHOTTKY @RB160M
MAIN-P.W.Board		SD8502	48E40860S01	DIO,SHOTTKY @RB160M
MAIN-P.W.Board		SD8503	48E40860S01	DIO,SHOTTKY @RB160M
MAIN-P.W.Board		SD8504	48E40860S01	DIO,SHOTTKY @RB160M
MAIN-P.W.Board		SD8505	48E42352S01	DIO,SHOTTKY STPS5H100
MAIN-P.W.Board		SD8506	48E42352S01	DIO,SHOTTKY STPS5H100
MAIN-P.W.Board		SD8507	48E40860S01	DIO,SHOTTKY @RB160M
MAIN-P.W.Board		SD8508	48E40860S01	DIO,SHOTTKY @RB160M
MAIN-P.W.Board		SK1001	09-09584Z01	SKT,TCX3142-110187EA
MAIN-P.W.Board		SK7001	09E42272S01	CONN,USB-B 6P
MAIN-P.W.Board		SW1002	40E42271S01	SW,TACT SKHHLWA010
MAIN-P.W.Board		T8501	25-15527Z01	CHOKE,ALD-16-8 -DB
MAIN-P.W.Board		XL1001	91-10720Z02	XTL,NX8045GB 4.0M-E5
MAIN-P.W.Board		XL2001	91-10720Z02	XTL,NX8045GB 4.0M-E5
MAIN-P.W.Board		XL3001	91E42458S01	OSC CLOCK,DSO221SH24.5
MAIN-P.W.Board		XL3501	91E42458S01	OSC CLOCK,DSO221SH24.5
MAIN-P.W.Board		XL5001	91E42457S01	OSC CLOCK,DSO221SH33.2
MAIN-P.W.Board		XL6001	91E42457S01	OSC CLOCK,DSO221SH33.2
MAIN-P.W.Board		XL7001	91-15988Z01	XTL,NX3225GA 11.2-CP
MAIN-P.W.Board		XL7002	91-15988Z02	XTL,NX3225GA 12.0-CP
MAIN-P.W.Board		Z5501	91E40215S01	FIL,EMI BK1608HM102
MAIN-P.W.Board		Z5502	91E40215S01	FIL,EMI BK1608HM102
MAIN-P.W.Board		Z5503	91E40215S01	FIL,EMI BK1608HM102
MAIN-P.W.Board		Z5504	91E40215S01	FIL,EMI BK1608HM102
MAIN-P.W.Board		Z5505	91E40215S01	FIL,EMI BK1608HM102
MAIN-P.W.Board		Z5506	91E40215S01	FIL,EMI BK1608HM102
MAIN-P.W.Board		Z6001	91E42456S01	FIL,EMI BK1608LL121
MAIN-P.W.Board		Z6002	91E42456S01	FIL,EMI BK1608LL121
MAIN-P.W.Board		Z6003	91E42456S01	FIL,EMI BK1608LL121
MAIN-P.W.Board		Z6004	91E42456S01	FIL,EMI BK1608LL121
MAIN-P.W.Board		Z6005	91E42456S01	FIL,EMI BK1608LL121
MAIN-P.W.Board		Z6006	91E42456S01	FIL,EMI BK1608LL121
MAIN-P.W.Board		Z6007	91E42456S01	FIL,EMI BK1608LL121
MAIN-P.W.Board		Z6008	91E42456S01	FIL,EMI BK1608LL121
MAIN-P.W.Board		Z6009	91E42456S01	FIL,EMI BK1608LL121
MAIN-P.W.Board		Z6010	91E42456S01	FIL,EMI BK1608LL121
MAIN-P.W.Board		Z6011	91E42456S01	FIL,EMI BK1608LL121
MAIN-P.W.Board		Z6012	91E42456S01	FIL,EMI BK1608LL121
MAIN-P.W.Board		Z6013	91E42456S01	FIL,EMI BK1608LL121
MAIN-P.W.Board		Z6014	91E42456S01	FIL,EMI BK1608LL121
MAIN-P.W.Board		Z6015	91E42456S01	FIL,EMI BK1608LL121
MAIN-P.W.Board		Z6016	91E42456S01	FIL,EMI BK1608LL121
MAIN-P.W.Board		ZD1001	48E42350S01	DIO,ZENER LUDZ3.9B
MAIN-P.W.Board		ZD1002	48E42350S01	DIO,ZENER LUDZ3.9B
MAIN-P.W.Board		ZD1003	48E42350S01	DIO,ZENER LUDZ3.9B
MAIN-P.W.Board		ZD1004	48E42430S01	DIO,ZENER LUDZ20B

MAIN-P.W.Board		ZD1006	48E38089S01	DIODE,ZENER UDZS5.6B
MAIN-P.W.Board		ZD1007	48E42350S01	DIO,ZENER LUDZ3.9B
MAIN-P.W.Board		ZD2001	48E42429S01	DIODE,ZENER UDZS6.8B
MAIN-P.W.Board		ZD2002	48E42429S01	DIODE,ZENER UDZS6.8B
MAIN-P.W.Board		ZD2003	48E38089S01	DIODE,ZENER UDZS5.6B
MAIN-P.W.Board		ZD8501	48E38089S01	DIODE,ZENER UDZS5.6B
MAIN-P.W.Board		ZD8502	48E41047S01	DIO,ZENER Z5W27V
LED-P.W.Board		C9001	08E42324S01	CAP,CER. 1000pF/50V
LED-P.W.Board		C9002	08E42324S01	CAP,CER. 1000pF/50V
LED-P.W.Board		C9003	08E42324S01	CAP,CER. 1000pF/50V
LED-P.W.Board		C9004	08E42324S01	CAP,CER. 1000pF/50V
LED-P.W.Board		C9005	23E41346S01	CAP,CER. 0.22uF/50V
LED-P.W.Board		C9006	23E41346S01	CAP,CER. 0.22uF/50V
LED-P.W.Board		CB9001	09E42235S01	CONN,FFC 14P
LED-P.W.Board		IC9001	51E38054S01	IC,TC74VHC08FT
LED-P.W.Board		LD9001	48E41405S01	LED,SML512BC5T BLUE
LED-P.W.Board		LD9002	48E42428S01	LED,RED
LED-P.W.Board		LD9003	48E42428S01	LED,RED
LED-P.W.Board		LD9004	48E42428S01	LED,RED
LED-P.W.Board		Q9001	48E42356S01	TR,DTC143XUA
LED-P.W.Board		Q9002	48E42356S01	TR,DTC143XUA
LED-P.W.Board		Q9003	48E42356S01	TR,DTC143XUA
LED-P.W.Board		Q9004	48E42356S01	TR,DTC143XUA
LED-P.W.Board		R9002	06E37090S01	RES,CF. 1.2K-1/4W
LED-P.W.Board		R9003	06E36227S01	RES,CF. 3.9K-1/4W
LED-P.W.Board		R9005	06E36227S01	RES,CF. 3.9K-1/4W
LED-P.W.Board		R9008	06E36227S01	RES,CF. 3.9K-1/4W
LED-P.W.Board		R9009	06E42287S01	RES,CF. 47K-1/16W
LED-P.W.Board		R9010	06E42287S01	RES,CF. 47K-1/16W
LED-P.W.Board		R9011	06E42287S01	RES,CF. 47K-1/16W
LED-P.W.Board		R9012	06E42287S01	RES,CF. 47K-1/16W
LED-P.W.Board		R9013	06E42287S01	RES,CF. 47K-1/16W

Mark Model Code

#1 PXA-H800(North American) Only,

\$1 PXA-H800(European) Only,

%1 PXA-H800(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

#####

	1	-----	HEAT SINK, MAIN
	2	-----	CHAS,BOTTOM
	4	-----	CHAS SIDE-L
	5	-----	CHAS SIDE-R
	6	61E42264S01	LENS,BASE
	7	61E42267S01	LENS,DIFFUSION
	8	61E42265S01	LENS,LED
	9	33E42269S01	PLATE,SCALE
	10	61E42266S01	LENS,INDICATOR
	12	30E42238S01	CABLE,FLAT 14P
	13	07E42268S01	BKT,OPT
	14	33E42263S01	PLATE,NAME
	15	14E42464S01	INS,GAPPAD-DAC
	16	03E38698S01	SCR,M3X8(P)(BLK)
	17	03E41471S01	SCR,M2.6X8(P)(BLK)
	18	03E31890S01	SCR,M2.6X5(WP)(WHT)
	CB8501	09E40142S01	CONN,PWR 8P
	DIN2001	09T55071W02	CONN,TCP9389 GREY
	DIN2002	09T55071W02	CONN,TCP9389 GREY
	IC7002	51T45265W03	TORX193 -NS
	IC7005	51T45265W03	TORX193 -NS
	JK5501	09T55293Y03	JAC,HSJ6061-01-250DB
	RCA1	09E39714S01	RCA,JACK 2P-4P
	RCA2	09E39714S01	RCA,JACK 2P-4P
	RCA3	09E39714S01	RCA,JACK 2P-4P
	RCA4	09E39714S01	RCA,JACK 2P-4P
	RCA5	09E39714S01	RCA,JACK 2P-4P
	RCA6	09E39714S01	RCA,JACK 2P-4P
	RCA7	09E39714S01	RCA,JACK 2P-4P
	SK1001	09-09584Z01	SKT,TCX3142-110187EA
	SK7001	09E42272S01	CONN,USB-B 6P
	SW1002	40E42271S01	SW,TACT SKHHLWA010

Mark Model Code

#1 PXA-H800(North American) Only,

\$1 PXA-H800(European) Only,

%1 PXA-H800(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

#####